
CLV316-12

# Extra low voltage connector

# 2CMA100905R1000

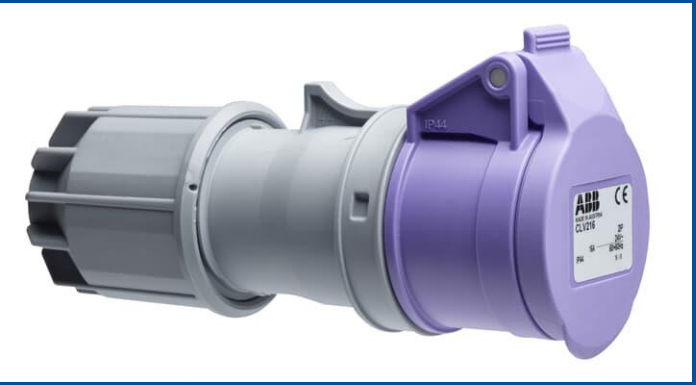

Connector Extra low voltage, secondary key position 12h, rated current 16A, IP44 splashproof, 3-poles, frequency 50-60 Hz, color code White

## GENERAL

| | |
|---|---|
| **Product Name** | Extra low voltage connector |
| **Product ID** | 2CMA100905R1000 |
| **Function** | Extra low voltage connector |
| **EAN** | 739269058 |
| **Catalog Description** | Industrial Connectors, 3P, 16 A, 40 … 50 AC V |
| **Country of Origin** | Austria (AT) |
| **E-Number Finland** | |
| **E-Number Norway** | |
| **E-Number Sweden** | E2417741 |
| **Standards** | IEC 60309-1, -2 |
| **RoHS Status** | Following EU Directive 2011/65/EU |

## TECHNICAL

| | |
|---|---|
| **Product Main Type** | CLV |
| **Color** | White |
| **Number of Poles** | 3 |
| **Clock Position** | 12Hour |
| **Rated Current** | 16 ampere |
| **Rated Voltage** | 40 … 50 volt AC |
| **Frequency** | |
| **Degree of Protection** | IP44 |
| **Cable Cross-Section** | 1…10 mm² |
| **Housing Material** | Plastic |
| **Plug Angle** | Straight |
| **Product Group** | Special Plugs & Sockets |

## DIMENSIONS

| | |
|---|---|
| **Product Net Width** | 75 millimetre |
| **Product Net Height** | 75 millimetre |
| **Product Net Length** | 150 millimetre |
| **Product Net Depth** | 150 millimetre |
| **Product Net Weight** | 0.198 kilogram |

## PACKAGING

| | |
|---|---|
| **Package Width** | 152 millimetre |
| **Package Height** | 77 millimetre |
| **Package Gross Weight** | 1.98 kilogram |
| **Package Length** | 152 millimetre |
| **Package Units** | box 10 piece |