Welcome to the World of AirBorn Interconnect Solutions

CATALOG PAGES CURRENT AS OF APRIL 2012 FOR MOST CURRENT CATALOG VISIT US AT WWW.AIRBORN.COM OR CLICK THE PAGE REVISION

AirBorn has been manufacturing high reliability interconnect systems for more than 45 years with leading-edge, innovative technology that is more reliable and better-performing than practically all other alternatives.

Our advanced technologies, experienced design support, incomparable lead times and personalized customer service and support provide customers with complete solutions to a vast array of highly specialized design requirements in diverse markets and applications.

You will find in this catalog technical drawings and specification information that will help you solve your interconnection needs from the design stage through production specification.

The products in this catalog are organized by the AirBorn part number assigned to them.

Each connector part number identifies four elements:

- AirBorn Series
- Size (number of contacts)
- Contact Type
- Hardware Type

Each catalog page shows the choices available for each of these elements. By selecting one option from any category on the page, you can build a set of connectors to meet your requirements.

If you do not find a particular connector size or option, please contact AirBorn for further assistance. AirBorn can manufacture special configurations for your exact specifications.

When everything matters, go AirBorn.

www.AirBorn.com

AirBorn International LTD
Mercury House, Station Road
Edenbridge. Kent. TN8 6HL
United Kingdom

Phone: +44 (0)1732 864930
E-mail: cs@airbo int.com

AirBorn
4321 AirBorn Drive
Addison, TX 75001-0519
United States

Phone: (972) 931-3200
Fax: (972) 931-9305
E-mail: info@airborn.com

AirBorn
3500 AirBorn Circle
Georgetown, TX 78626
United States

Phone: (512) 863-5585
Fax: (512) 863-8259
E-mail: info@airborn.com

"W" SERIES - .100"
MIL-C-55302
See pages W-7 thru W-86

"WB" SERIES - .050"
MIL-C-55302
See pages WB-1 thru WB-13

"W" SERIES ACCESSORIES
See pages WA-1 thru WA-25

"W" SERIES - .100"
MIL-C-55302

Mating Matrix for AirBorn "W" Series Connectors

SOCKETS

PINS

SERIES	WT	WTA (F)	WTAX	WTB	WTBT	WTDX	WTK	WG	WGA	WGDX	WGK	WGR	WRD	WRDDX	WRF
WT	X														
WTA (T)		X		X	X	X	X								
WTAV			X	X	X	X	X								
WTB*P		X	X	X	X	X	X								
WTBV		X	X	X	X	X	X								
WTDV		X	X	X	X	X	X								
WTKV		X	X	X	X	X	X								
WG*P								X		X	X				
WGV								X		X	X				
WGA*P									X						
WGAV									X						
WGDV								X		X	X				
WGKV								X		X	X				
WGR												X			
WRD*P													X	X	
WRDV													X	X	
WRF															X

I/O CONNECTORS WT, WTA, WTAX, WTDX, WTK, WG, WGA, WGDX, WGK, WRD, WRDDX, WRF

PCB CONNECTORS WT, WTA, WTAX, WTB, WTBT, WG, WGA, WRD, WRF


(T) = TURNING HARDWARE

(F) = FIXED HARDWARE

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com


Daughterboard to Motherboard or Chassis

Right angle plug to straight receptacle




1 Row
Sizes: 3 thru 22
Page: W-11

Straight plug to straight receptacle




1 Row
Sizes: 3 thru 22
Page: W-13

Cable to board or panel

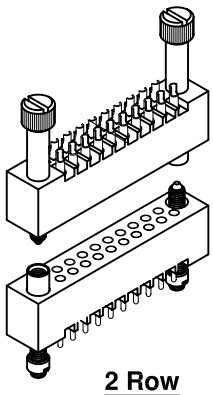


2 Row
Sizes: 10 thru 70
Page: W-15

PC card to board or chassis

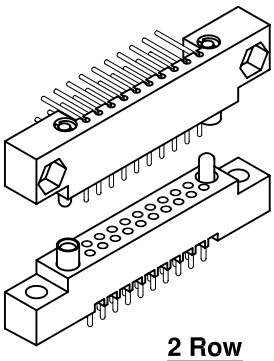


2 Row
Sizes: 10 thru 70
Page: W-19

PC card to board or chassis

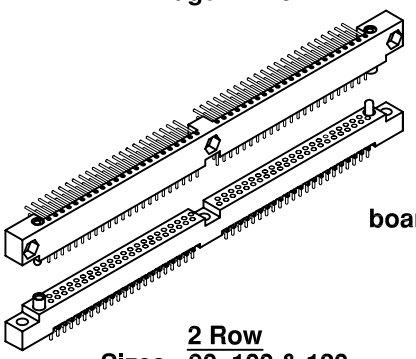


2 Row
Sizes: 90, 100 & 120
Page: W-21

Cable to board or PC card




2 Row
Sizes: 10 thru 70
Page: W-27

PC card to board or PC card

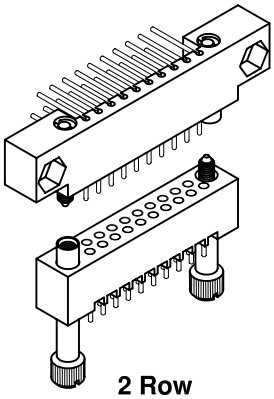

2 Row
Sizes: 10 thru 70
Page: W-29


PC card to board or chassis

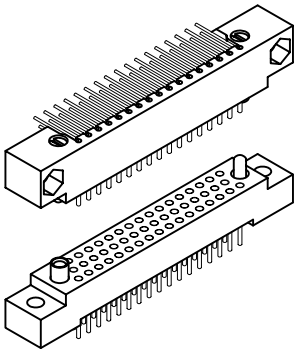

3 Row
Sizes: 50 thru 104
Page: W-43


Daughterboard to Motherboard or Chassis

PC card to board or PC card

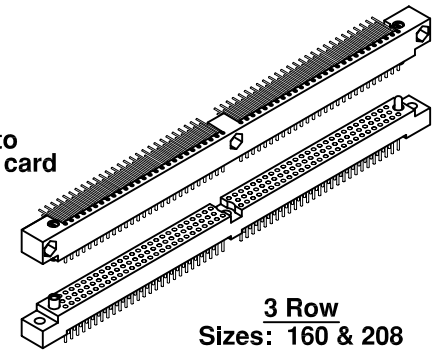


3 Row
Sizes: 160 & 208
Page: W-47

PC card to board or chassis

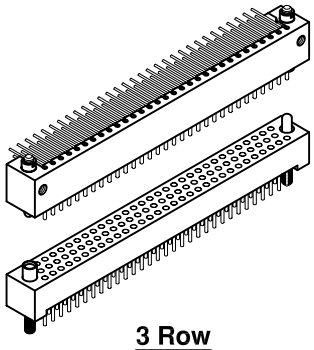


3 Row
Sizes: 92
Page: W-53

PC card to board or chassis

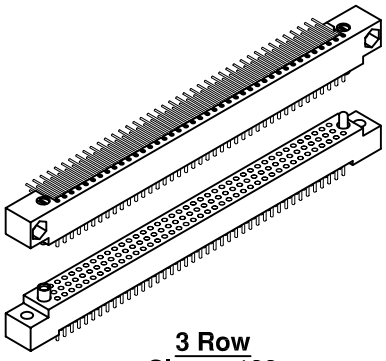


3 Row
Sizes: 122
Page: W-55

Cable to board or panel

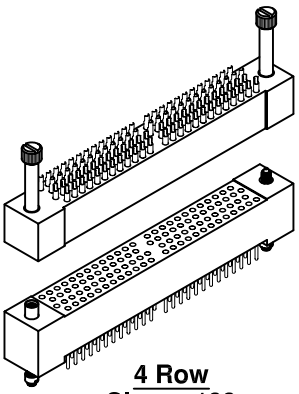


4 Row
Sizes: 100
Page: W-59

PC card to board or chassis

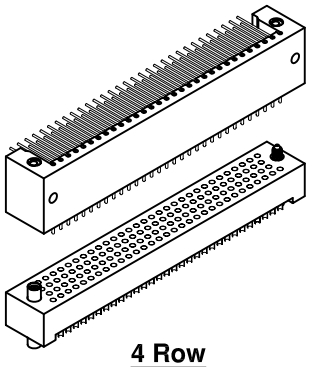


4 Row
Sizes: 122
Page: W-61


Sandwich Boards

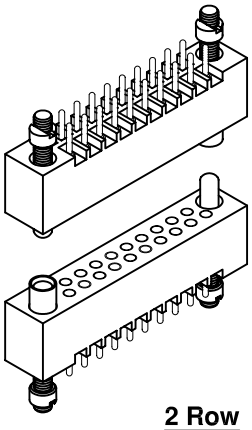


2 Row
Sizes: 10 thru 70
Page: W-17

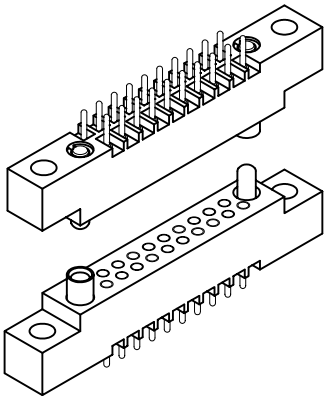


2 Row
Sizes: 10 thru 70
Page: W-23

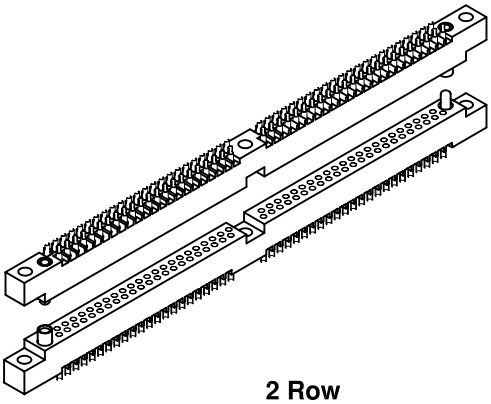


2 Row
Sizes: 90 & 100
Page: W-25



3 Row
Sizes: 50 thru 104
Page: W-45

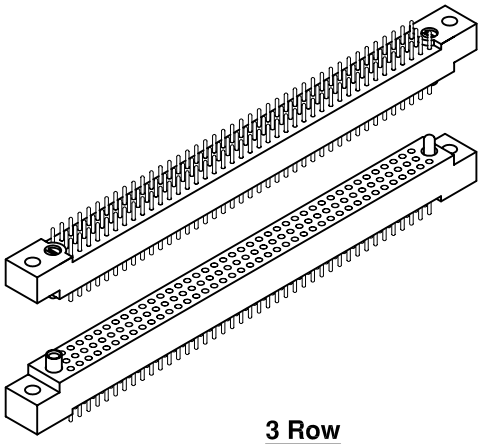


3 Row
Sizes: 122
Page: W-57

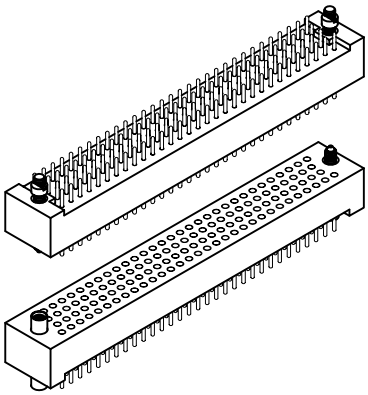

4 Row
Sizes: 122
Page: W-63


Crimp Removable

PC card to chassis

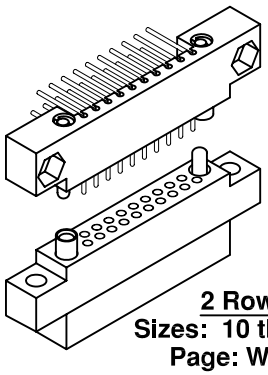


2 Row
Sizes: 10 thru 70
Page: W-31

PC card to chassis

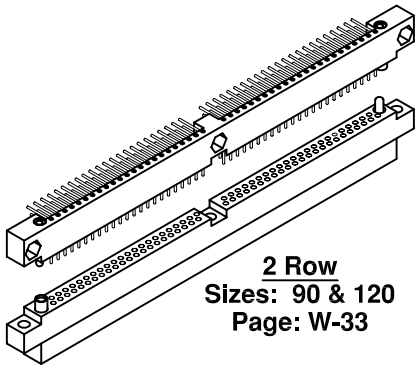


2 Row
Sizes: 90 & 120
Page: W-33

PC card to board

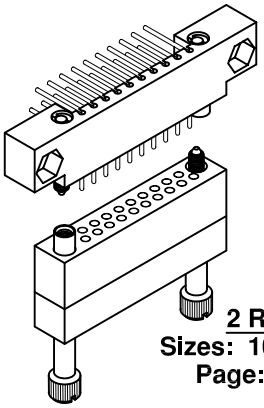


2 Row
Sizes: 10 thru 70
Page: W-35

PC card to chassis




3 Row
Sizes: 80 & 160
Page: W-51

PC card to chassis




3 Row
Sizes: 80 & 160
Page: W-49

PC card to cable

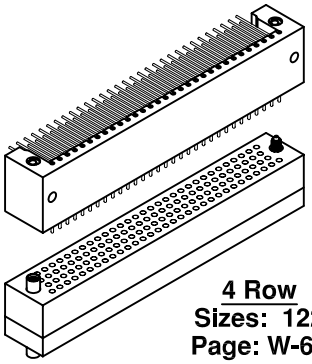


4 Row
Sizes: 122
Page: W-65

Crimp Removable to Crimp Removable




2 Row
Sizes: 10 thru 70
Page: W-34.1

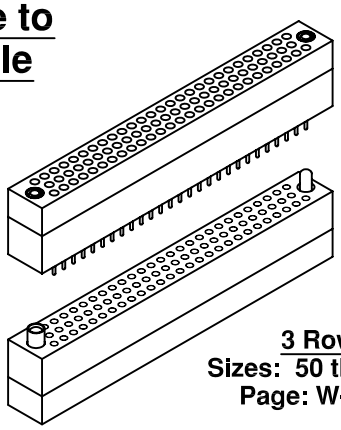


3 Row
Sizes: 50 thru 104
Page: W-52.1

Extender Boards




2 Row
Sizes: 10 thru 70
Page: W-39

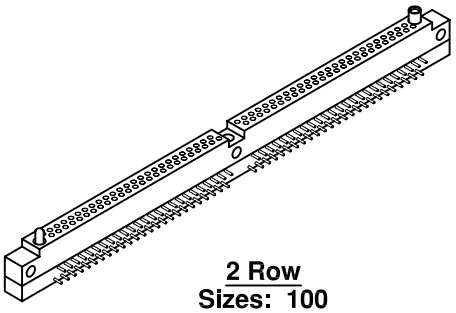

2 Row
Sizes: 100
Page: W-41


Coax Connectors

PC Card to board or chassis

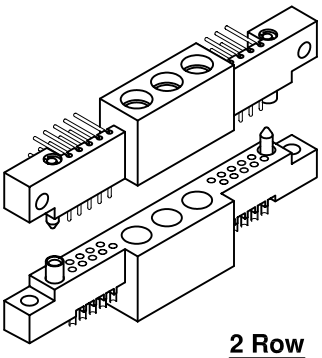


2 Row
Sizes: 20-3
Page: W-67

PC Card to board or chassis

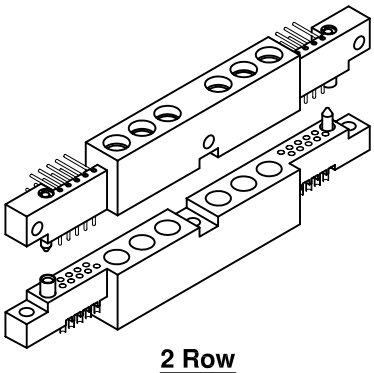


2 Row
Sizes: 20-6
Page: W-69

PC Card to chassis or board

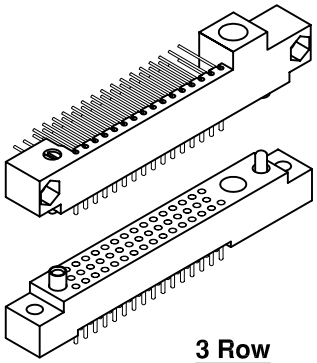

3 Row
Sizes: 47-1
Page: W-71


PC Card to chassis

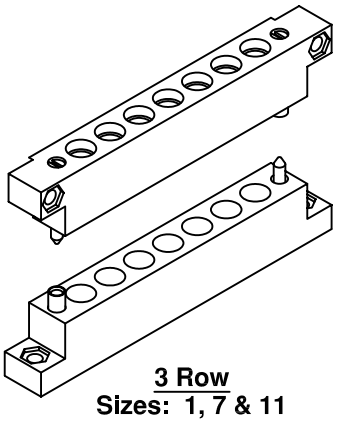

3 Row
Sizes: 1, 7 & 11
Page: W-73


Misc Connectors

Power cable to chassis

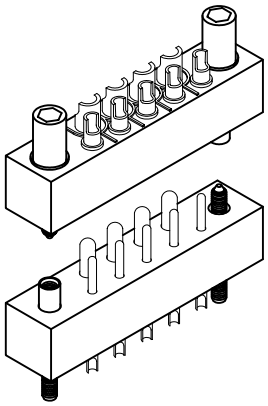


2 Row
Sizes: 5 & 4-5
Page: W-75

Power cable to chassis

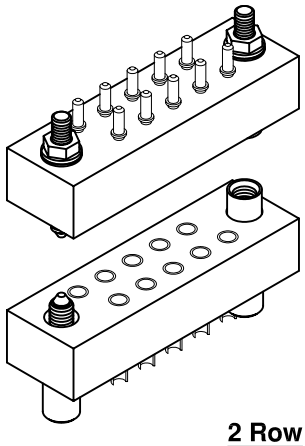


2 Row
Sizes: 10
Page: W-77

Quarter round sandwich boards

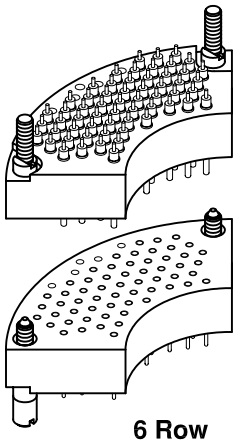


6 Row
Sizes: 59
Page: W-79

Pin protected PC card to board

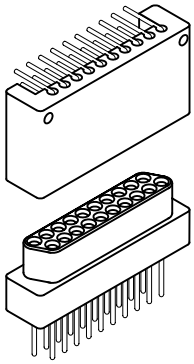


2 Row
Sizes: 10 & 20
Page: W-81

Stackable board to board

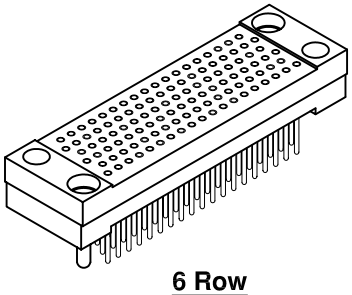

6 Row
Sizes: 111
Page: W-83

Stackable board to board

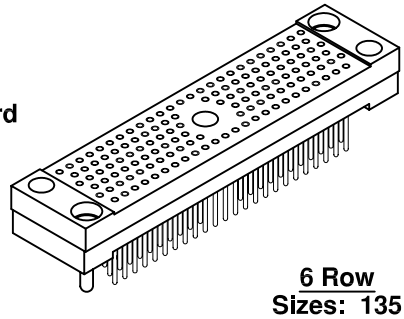

6 Row
Sizes: 135
Page: W-85

Contents

"W" Series
.100" Rectangular Plastic Board Level Connectors

W-1	Index	
W-7	Contents	
W-8	Specifications	
W-9	Performance	
W-10	Part number description	
	1-Row Connectors - Board to Board, Board to Cable	
W-11	WT - WT	PC card to cable or board, cable to cable
W-13	WT - WT	PC card to cable or board, cable to cable
	2-Row Connectors - Board to Board, Board to Cable, Sizes: 10-100	
W-15	WTA - WTA	Cable to board or panel, without mounting ears. Sizes: 10 thru 70
W-17	WTAV-WTAX	Sandwich boards (straight to straight). Sizes: 10 thru 70
W-19	WTB - WTB	PC card to board or chassis. Sizes: 10 thru 70
W-21	WTB - WTB	PC card to board or chassis. Sizes: 90, 100 & 120
W-23	WTBV - WTB	Sandwich boards. Sizes: 10 thru 70
W-25	WTBV - WTB	Sandwich boards. Sizes: 90 & 100
W-27	WTA - WTB	Cable to board or PC card. Sizes: 10 thru 70
W-29	WTB - WTAX	PC card to board or PC card. Sizes: 10 thru 70
W-31	WTB - WTKA	PC card to chassis (crimp removable), with mounting ears. Sizes: 10 thru 70
W-33	WTB - WTKA	PC card to chassis (crimp removable), with mounting ears. Sizes: 90 & 120
W-34.1	WTKV - WTKA	Chassis to chassis (crimp removable), with mounting ears. Sizes: 10 thru 70
W-35	WTB - WTDXA	PC card to cable (crimp removable), without mounting ears. Sizes: 10 thru 70
W-37	WTB - WTDXA	PC card to cable (crimp removable), without mounting ears. Sizes: 90 & 120
W-38.1	WTDV - WTDXA	Chassis to chassis (crimp removable), without mounting ears. Sizes: 10 thru 70
W-39	WTBT	Extender board (right angle receptacle). Sizes: 10 thru 70
W-41	WTBT	Extender board (right angle receptacle). Sizes: 100
	3-Row Connectors - Board to Board, Board to Cable	
W-43	WG - WG	PC card to board or chassis. Sizes: 50 thru 104
W-45	WGV - WG	Sandwich board to PC card. Sizes: 50 thru 104
W-47	WG - WG	PC card to board or PC card. Sizes: 160 & 208
W-49	WG - WGKA	PC card to chassis (crimp removable), with mounting ears. Sizes: 80 & 160
W-50.1	WGKV - WGKA	Chassis to chassis (crimp removable), with mounting ears. Sizes: 50 thru 104
W-51	WG - WGDXA	PC card to chassis (crimp removable), without mounting ears. Sizes: 80 & 160
W-52.1	WGDV - WGDXA	Chassis to chassis (crimp removable), without mounting ears. Sizes: 50 thru 104
W-53	WGR - WGR	PC card to board or chassis. Sizes: 92
W-55	WGA - WGA	PC card to board or chassis. Sizes: 122
W-57	WGAV - WGA	Sandwich boards. Sizes: 122
	4-Row Connectors - Board to Board, Board to Cable	
W-59	WRF - WRF	Cable to board or panel. Sizes: 100
W-61	WRD - WRD	PC card to board or chassis. Sizes: 122
W-63	WRDV - WRD	Sandwich boards. Sizes: 122
W-65	WRD - WRDDXA	PC card to cable (crimp removable) without mounting ears. Sizes: 122
	Coax Hybrid Connectors - PC Card to Board, Board to Cable (SMB slide-on, 50 ohm contacts)	
W-67	WTB20-3	Signal-coax hybrid, PC card to board or chassis. Sizes: 20-3
W-69	WTB20-6	Signal-coax hybrid, PC card to board or chassis. Sizes: 20-6
W-71	WG47-1	Signal-coax hybrid, PC card to board or chassis. Sizes: 47-1
W-73	WRBC	Coax hybrid. Sizes 1, 7 & 11
	Miscellaneous Connectors	
W-75	PA - PA	Power connector (#12 & #16 contacts) to chassis. Sizes: 5 & 4-5
W-77	PA - PA	Power connector (#12 contacts) to chassis. Sizes: 10
W-79	WTA59 - WTA59	Quarter round sandwich boards. Sizes: 59
W-81	WTE - WTE	Pin protected PC card to board. Sizes: 10 & 20
W-83	WE	Stackable, board to board. Sizes: 111
W-85	WE	Stackable, board to board. Sizes: 135

Contents

"WB" Series
.050" Rectangular Plastic Board Level Connectors

WB-1	Contents	
WB-2	Specifications	
WB-3	Performance	
WB-4	Part number description	
	2-Row Connectors - PC Card or SMT to Board, Sizes: 20-132	
WB-5	WB	Plug, right angle, with mounting ears
	WB	Receptacle, straight, with mounting ears
WB-7	WBB, WBA	Plug, straight, surface mount, with mounting ears
	WB	Receptacle, straight, with mounting ears
WB-9		Hardware
WB-10	WB	Board layout - plug, right angle
WB-11	WB	Board layout - receptacle, straight
WB-12	WBB, WBA	Board layout - plug, straight, surface mount
	Military Cross Reference	
WB-13	Chart	

Specifications
Materials and Finishes *

Pin Contacts:	Copper alloy per MIL-C-55302
Socket Contacts:	Clipped contacts: Contact: BeCu per MIL-C-55302 Terminal: Copper alloy per MIL-C-55302 Crimp removable contacts: Contact & terminal: Copper alloy per MIL-C-55302
Contact Finish:	Gold plate per ASTM B 488 or SAE AMS 2422. Localized finish per MIL-C-55302
Molded Insulators:	Glass filled polyphenylene sulfide per MIL-M-24519, Type GST-40F
Jackscrews:	Stainless steel per ASTM A 582/A582M-, Passivated per ASTM-A967, SAE AMS-QQ-P-35
Jacksockets:	Stainless steel per ASTM A 582/A582M-, Passivated per ASTM-A967, SAE AMS-QQ-P-35
Jackscrew Knobs:	Stainless steel per ASTM A 582/A582M-, Passivated per ASTM-A967, SAE AMS-QQ-P-35
Guide Pins, Guide Sockets:	Stainless steel per ASTM A 582/A582M-, Passivated per ASTM-A967, SAE AMS-QQ-P-35
Guide Sockets, Polarized "D" type:	BeCu per ASTM-B196, ASTM B 197/B 197M-, Nickel plated per SAE AMS-QQ-N-290
Face Seal Gasket:	Silicone rubber per A-A-59588

Miscellaneous:

Connector Markings:	Contact numbers are stamped on the side of the connector. Numbers are stamped on the low-numbered side only on 2-row and 3-row right angle connectors
Torque:	Polarizing Guides and Floating Mounts: 16 + 8/-0 inch ounces. (Minimum of 7 inch ounce reverse torque per Mil-C-55302). Mounting & Hood Hardware: 24 inch ounces maximum. Mating Jacksets: 32 inch ounces maximum Wrap Post: 2 inch ounce minimum per Mil-STD-1130. Helicoil Inserts: #2-56 – 24 in/oz. maximum. #4-40 – 32 in/oz. maximum.
Tolerances:	Unless otherwise specified: Fractions = ±1/64" Decimals = ±.010" Angles = ±5°

Note: AirBorn can manufacture special configurations for your exact specifications.
* = Reference the above listed specifications or an equivalent industry standard when applicable

Performance
Reference MIL-C-55302

Contact Rating:	5-amperes
Solderability:	Terminals (except wire wrap® and crimp) tested in accordance with MIL-STD-202, Method 208
Wire Size:	Stranded #22 AWG (adapter sleeves available for larger sizes or twisted pairs).
Operating Temperature:	-65° to +125° C or -85° to +257° F

Category:	Requirements:	Test Method Per: SAE AS 13441
Test Voltage:	1,000 V, RMS, 60 Hz @ sea level 300 V, RMS, 60 Hz @ 70,000 feet	#3001
Insulation Resistance:	5,000 megohms minimum @ 500 VDC	#3003
Durability:	500 connector mating cycles	
Vibration:	Mated connectors, Test condition III	#2005
Salt Spray:	Mated connectors, Test condition B	#1001
Shock:	Mated connectors, Test condition G	#2004
Humidity:	Test Type II, except steps 7A and 7B not required	#1002
Temperature Cycling:	Mated connectors, Test condition A	#1003
Contact Resistance:	.025 volt maximum drop @ 5 amperes - .005 ohms (interface measurement)	#3004
Contact Engaging Force:	4.00 oz. maximum with .031 diameter test pin per SAE AS31971	#2014 & MIL-C-55302

Contact Engaging Force:	For lower force contacts with a nominal engaging force of 2 ounces per socket contact, substitute the letter "O" for the letter "A". Example: Part number WRG208SOCSY
Sizes 50 and larger:	Upon engagement, center area of mating faces may remain open .010" to .025" due to slight flexing of molding. Vibration or shock should provide complete closure.
Guides and Jacks:	If location of pin or socket contacts is reversed, location of male and female guides or jacks is also reversed; except when using "D" shaped polarized guides. When polarized positions are changed, apply Loctite®83-21 or equivalent to threads.

Note: See "Military Cross Reference" chart in the Accessories section.

Part Number Description

Each part number consists of at least four elements: series, size (number of contacts), type of contacts, and type of hardware. A fifth element is added whenever special modifications or options are available.

Each catalog page shows the choices available for each of these elements. By selecting one option from each category on the page, you can build a set of connectors to meet your requirements.

Each part number is identified by a combination of letters and/or numbers of varying lengths. These elements are written together without spaces or punctuation.

Series:
The series designator identifies the connector body style. Some body moldings are modified to accommodate right angle pins, but carry the same series number. Follow choices on each catalog page for series selections.

Size:
The size is determined by the number of contacts in the connector, and is an integral part of the part number. Order only sizes shown on the catalog page.

Contacts:
Each page also identifies contact options for a given connector. Please note that starting with the largest connectors, we are routinely substituting low-force sockets.

Hardware:
Hardware options are shown on each catalog page.

Notes:
If options or modifications are available for a given connector, it will be stated on the catalog page, or you will be referred to a different page for specific instructions. Remember when adding a suffix to the part number, add it exactly as instructed.


Each page is as comprehensive as possible. However, if you do not find a particular connector size or option, please contact the factory for further assistance.


1 · ROW
Right Angle Plug to Straight Receptacle

.100"

WT - WT


3 thru 22 Contacts

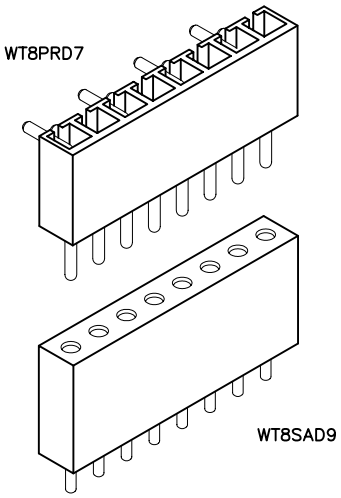

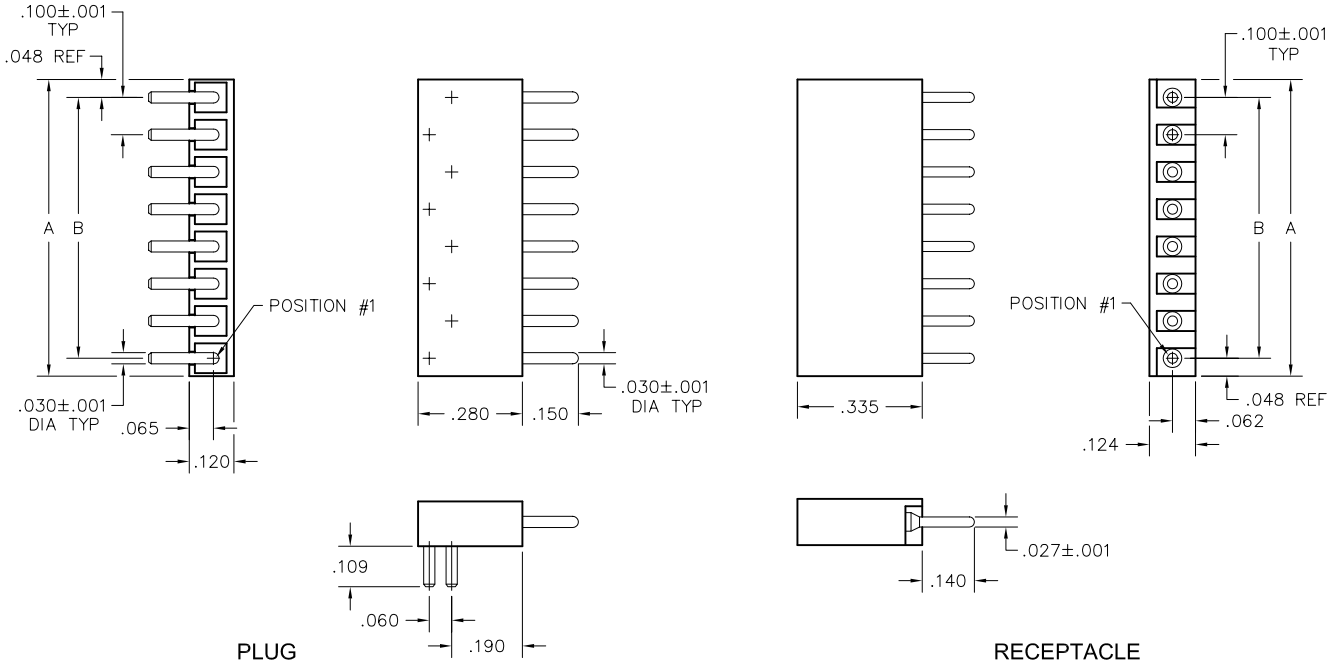

PLUG

RECEPTACLE

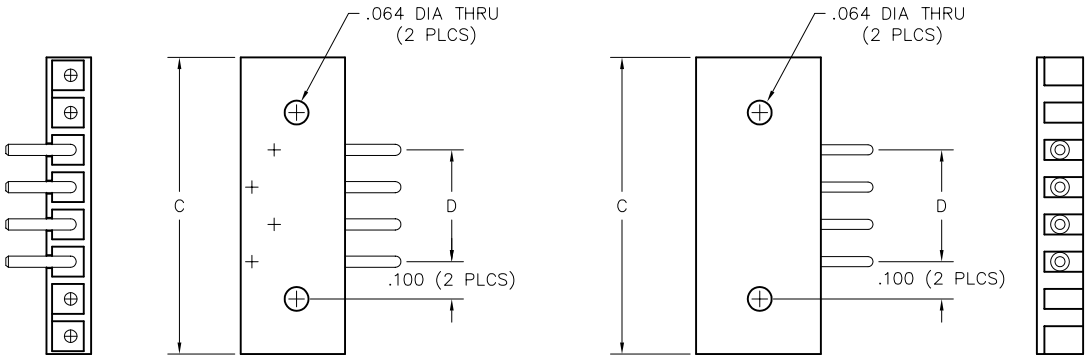

MOUNTING HOLES
(OPTION: CD)

AirBorn

PLUG: WT 8 PRD7
RECEPTACLE: WT 8 SAD9
XX X XXXX

PLUG		RECEPTACLE	
SERIES			
WT	Plug, right angle, no mounting ears	WT	Receptacle, straight, no mounting ears
SIZE			
	Number of contacts (3 thru 22)		Number of contacts (3 thru 22)
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PRD4	Pin, right angle, dip solder, .063" x .030" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PRD7	Pin, right angle, dip solder, .109" x .030" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PRD8	Pin, right angle, dip solder, .125" x .030" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
		SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAF3	Socket, straight, flex circuit, .050"
		SAF6	Socket, straight, flex circuit, .093"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination, .150" (connector saver)
		SAR4	Socket, right angle, dip solder, .062" x .025" dia
		SAR7	Socket, right angle, dip solder, .109" x .025" dia
		SAR9	Socket, right angle, dip solder, .140" x .025" dia
		SARC	Socket, right angle, solder cup
		SAW40	Socket, straight, wire wrap®, .625"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WT10PC443-1. Call factory for additional codes.

-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444 Contact position noted by dash number is left open (to mate with -443). See "Polarization" in Accessories section.
-B82 Termination face sealed against conformal coating
CD Cross drilled connector for hold down screws. See page W-11. Example: WT8PRD7CD or WT8SACCD.
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

Note: The thin outboard barriers are often removed at the factory due to their fragile nature.

☒ = Option not RoHS compliant

DIMENSIONS		
SIZE	A	B
3	.296	.200
4	.396	.300
5	.496	.400
6	.596	.500
7	.696	.600
8	.796	.700
9	.896	.800
10	.996	.900
11	1.096	1.000
12	1.196	1.100
13	1.296	1.200
14	1.396	1.300
15	1.496	1.400
16	1.596	1.500
17	1.696	1.600
18	1.796	1.700
19	1.896	1.800
20	1.996	1.900
21	2.096	2.000
22	2.196	2.100

DIMENSIONS (CD)			
SIZE	# OF CONTACTS	C	D
5	1	.496	——
6	2	.596	.100
7	3	.696	.200
8	4	.796	.300
9	5	.896	.400
10	6	.996	.500
11	7	1.096	.600
12	8	1.196	.700
13	9	1.296	.800
14	10	1.396	.900
15	11	1.496	1.000
16	12	1.596	1.100
17	13	1.696	1.200
18	14	1.796	1.300
19	15	1.896	1.400
20	16	1.996	1.500
21	17	2.096	1.600
22	18	2.196	1.700


AirBorn


1 · ROW
Straight Plug to Straight Receptacle


.100"

WT - WT

3 thru 22 Contacts

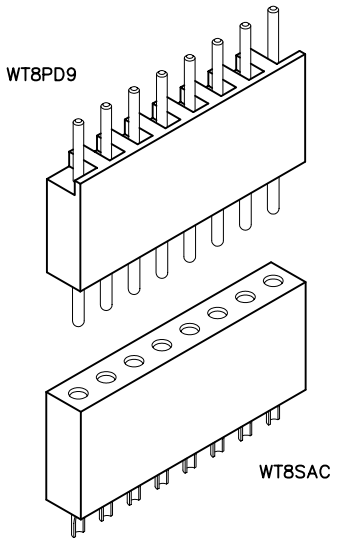

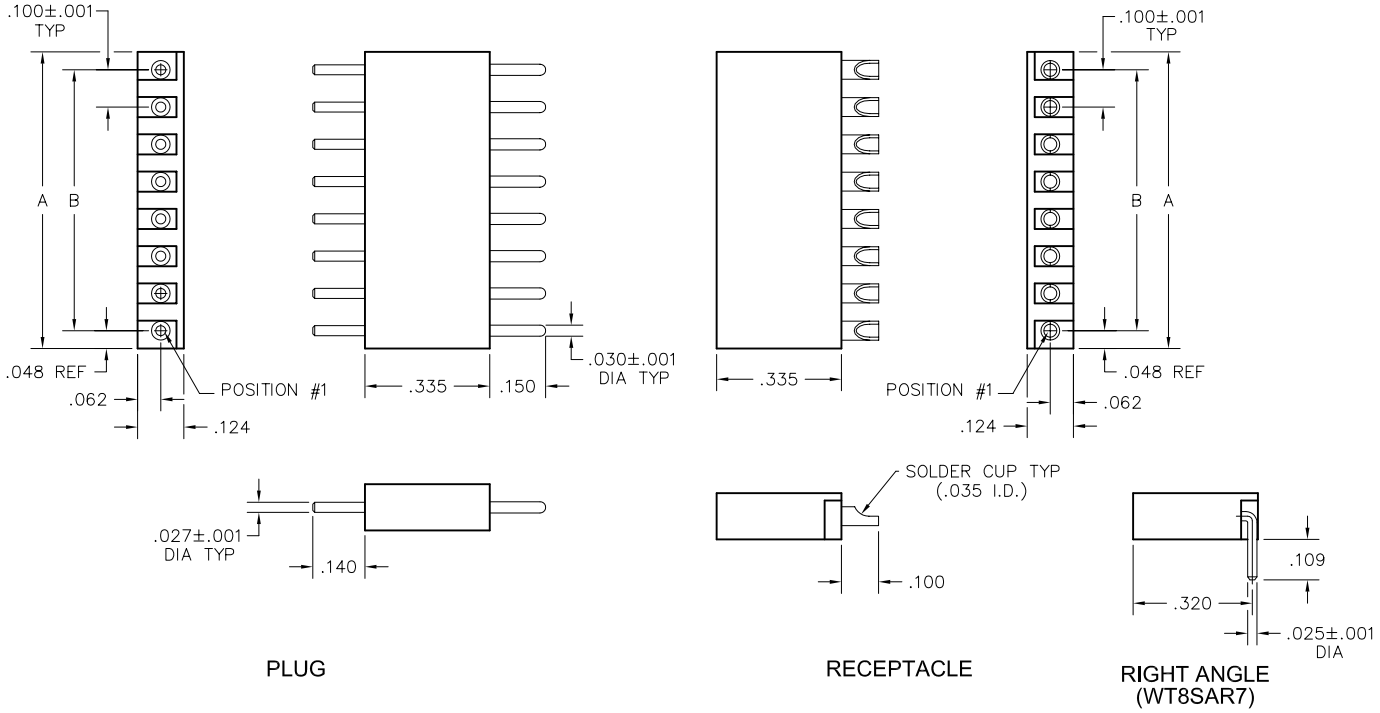

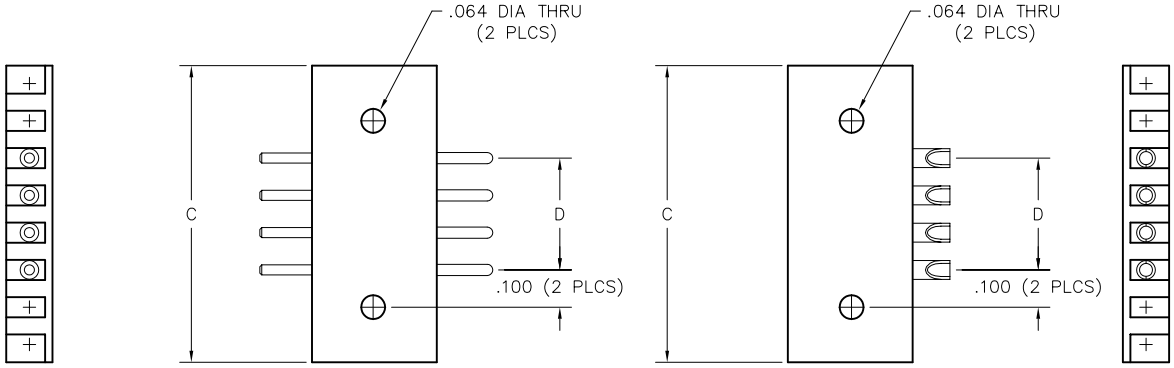

MOUNTING HOLES
(OPTION: CD)

AirBorn

PLUG: WT 8 PD9
RECEPTACLE: WT 8 SAC
XX X XXX

PLUG		RECEPTACLE	
SERIES			
WT	Plug, straight, no mounting ears	WT	Receptacle, straight, no mounting ears
SIZE			
	Number of contacts (3 thru 22)		Number of contacts (3 thru 22)
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PF3	Pin, straight, flex circuit, .050"	SAD15	Socket, straight, dip solder, .234" x .027" dia
PF6	Pin, straight, flex circuit, .093"	SAF3	Socket, straight, flex circuit, .050"
PW40	Pin, straight, wire wrap®, .625"	SAF6	Socket, straight, flex circuit, .093"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination, .150" (connector saver)
		SAR4	Socket, right angle, dip solder, .062" x .025" dia
		SAR7	Socket, right angle, dip solder, .109" x .025" dia
		SAR9	Socket, right angle, dip solder, .140" x .025" dia
		SARC	Socket, right angle, solder cup
		SAW40	Socket, straight, wire wrap®, .625"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WT10PC443-1. Call factory for additional codes.

-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444 Contact position noted by dash number is left open (to mate with -443). See "Polarization" in Accessories section.
-B82 Termination face sealed against conformal coating
CD Cross drilled connector for hold down screws. See page W-13. Example: WT8PCCD or WT8SACCD.
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

Note: The thin outboard barriers are often removed at the factory due to their fragile nature.

☒ = Option not RoHS compliant

DIMENSIONS		
SIZE	A	B
3	.296	.200
4	.396	.300
5	.496	.400
6	.596	.500
7	.696	.600
8	.796	.700
9	.896	.800
10	.996	.900
11	1.096	1.000
12	1.196	1.100
13	1.296	1.200
14	1.396	1.300
15	1.496	1.400
16	1.596	1.500
17	1.696	1.600
18	1.796	1.700
19	1.896	1.800
20	1.996	1.900
21	2.096	2.000
22	2.196	2.100


DIMENSIONS (CD)			
SIZE	# OF CONTACTS	C	D
5	1	.496	——
6	2	.596	.100
7	3	.696	.200
8	4	.796	.300
9	5	.896	.400
10	6	.996	.500
11	7	1.096	.600
12	8	1.196	.700
13	9	1.296	.800
14	10	1.396	.900
15	11	1.496	1.000
16	12	1.596	1.100
17	13	1.696	1.200
18	14	1.796	1.300
19	15	1.896	1.400
20	16	1.996	1.500
21	17	2.096	1.600
22	18	2.196	1.700


AirBorn

2 · ROW
Cable to Board or Panel
.100"

WTA - WTA

10 thru 70 Contacts

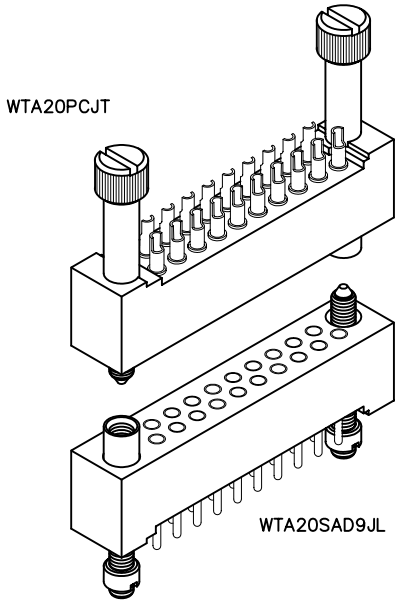

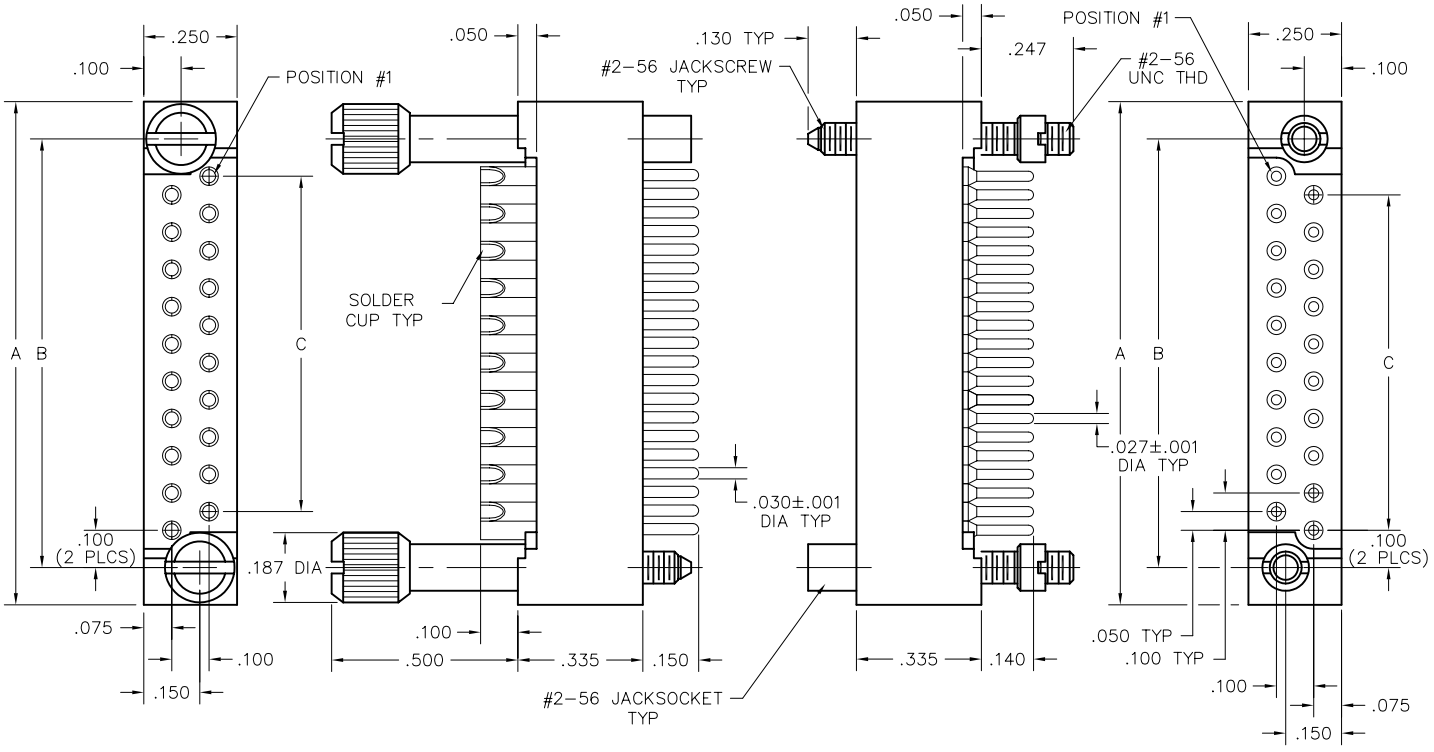

DIMENSIONS							
SIZE	A	B	C	SIZE	A	B	C
10	.850	.650	.400	44	2.550	2.350	2.100
14	1.050	.850	.600	50	2.850	2.650	2.400
20	1.350	1.150	.900	54	3.050	2.850	2.600
24	1.550	1.350	1.100	56	3.150	2.950	2.700
26	1.650	1.450	1.200	60	3.350	3.150	2.900
30	1.850	1.650	1.400	66	3.650	3.450	3.200
36	2.150	1.950	1.700	70	3.850	3.650	3.400
40	2.350	2.150	1.900				

PLUG: WTA 20 PC JT
RECEPTACLE: WTA 20 SAD9 JL
XXX XX XXXX XX

PLUG		RECEPTACLE	
SERIES			
WTA	Plug, straight, no mounting ears	WTA	Receptacle, straight, no mounting ears
SIZE			
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

	TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)
PD5	Pin, straight, dip solder, .078" x .027" dia
PD7	Pin, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia
PD15	Pin, straight, dip solder, .234" x .027" dia
PD20	Pin, straight, dip solder, .312" x .027" dia
PF3	Pin, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"
PF8	Pin, straight, flex circuit, .125"
PW34	Pin, straight, wire wrap®, .531"
PW40	Pin, straight, wire wrap®, .625"

	TYPE CONTACTS/TERMINATIONS:
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination, .150" (connector saver)
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"

HARDWARE

- Jackset hardware determines image of connector. Must specify image with guide set hardware.
- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTA10PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.
- Fixed jackset, long (JL) includes jackscrew or jacksocket, #2-56 nut, #2 flat washer & #2 lockwasher.

JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, .700"

J	Fixed jackset
JL	Fixed jackset, long

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTA10SAD9J-D01. Call factory for additional codes.


-443	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444	Contact position noted by dash number is left open (to mate with -443). See "Polarization" in Accessories section.
-B82	Termination face sealed against conformal coating
-D01	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)


☒ = Option not RoHS compliant

AirBorn

2 · ROW
Sandwich Boards
.100"

WTAV - WTAX
10 thru 70 Contacts

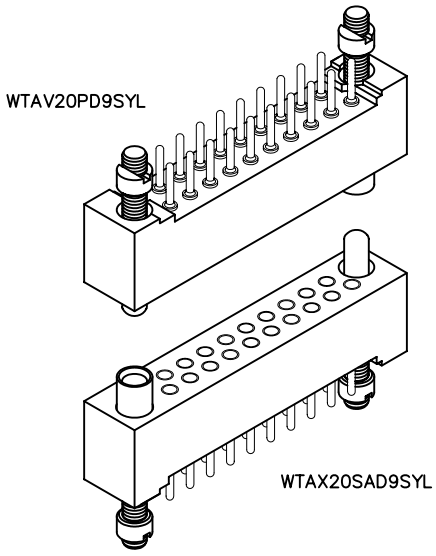

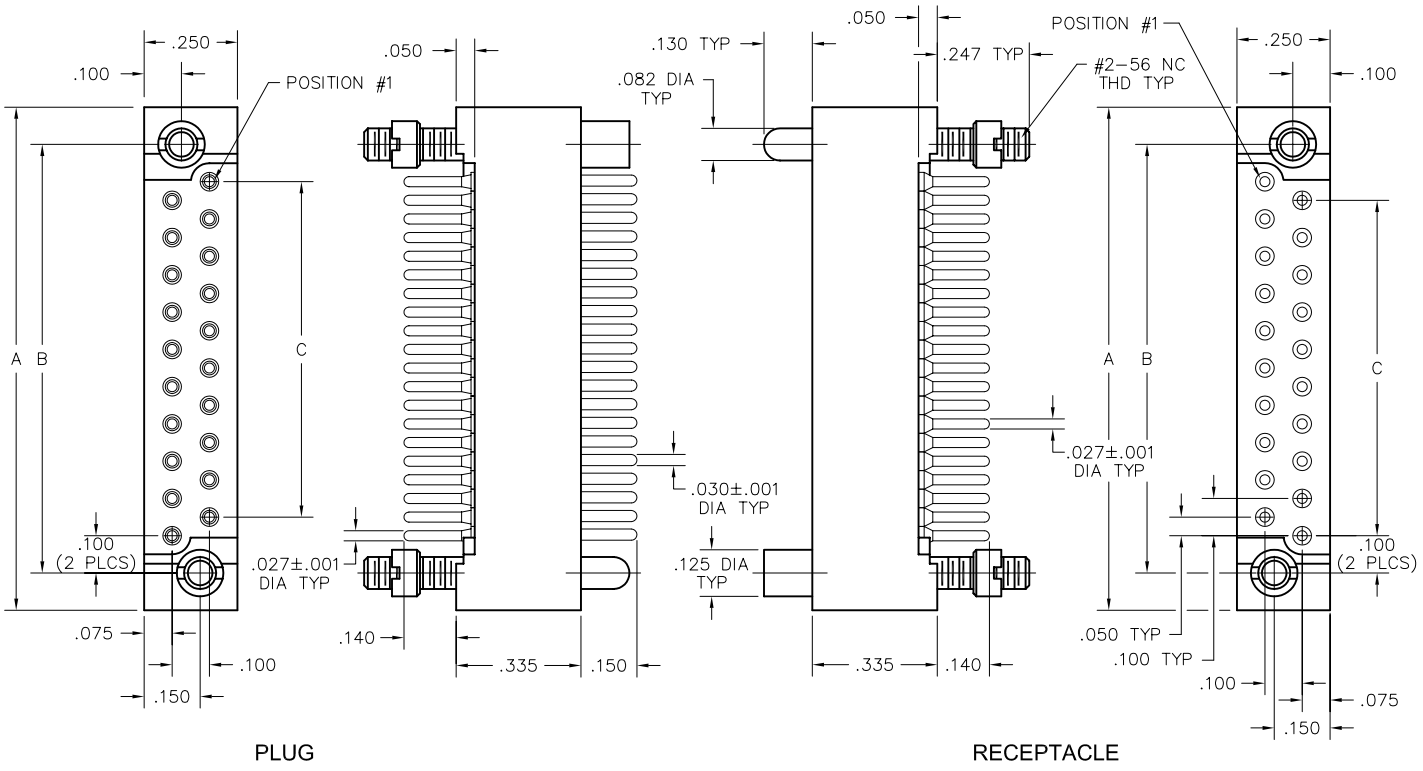

DIMENSIONS							
SIZE	A	B	C	SIZE	A	B	C
10	.850	.650	.400	44	2.550	2.350	2.100
14	1.050	.850	.600	50	2.850	2.650	2.400
20	1.350	1.150	.900	54	3.050	2.850	2.600
24	1.550	1.350	1.100	56	3.150	2.950	2.700
26	1.650	1.450	1.200	60	3.350	3.150	2.900
30	1.850	1.650	1.400	66	3.650	3.450	3.200
36	2.150	1.950	1.700	70	3.850	3.650	3.400
40	2.350	2.150	1.900				

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

PLUG: WTAV 20 PD9 SYL
RECEPTACLE: WTAX 20 SAD9 SYL
XXXX XX XXXX XXX

PLUG		RECEPTACLE	
SERIES			
WTAV	Plug, straight, no mounting ears	WTAX	Receptacle, straight, no mounting ears
		WTAX	Receptacle, right angle, no mounting ears
SIZE			
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

	TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia
PF3	Pin, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"
PF8	Pin, straight, flex circuit, .125"
PW34	Pin, straight, wire wrap®, .531"
PW40	Pin, straight, wire wrap®, .625"

	TYPE CONTACTS/TERMINATIONS:
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination, .150" (connector saver)
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Jackset hardware determines image of connector. Must specify image with guide set hardware.
- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTAV10PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.
- Fixed jackset, long (JL) includes jackscrew or jacksocket, #2-56 nut, #2 flat washer & #2 lockwasher

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
J	Fixed jackset
JL	Fixed jackset, long


SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTAV10PD9J-D01. Call factory for additional codes.

-433	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444	Contact position noted by dash number is left open (to mate with -443). See "Polarization" in Accessories section.
-B82	Termination face sealed against conformal coating
-D01	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant

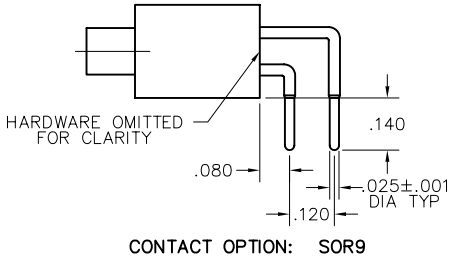



CONTACT OPTION: SOR9

AirBorn

2 · ROW
PC Card to Board or Chassis
.100"

WTB - WTB
10 thru 70 Contacts

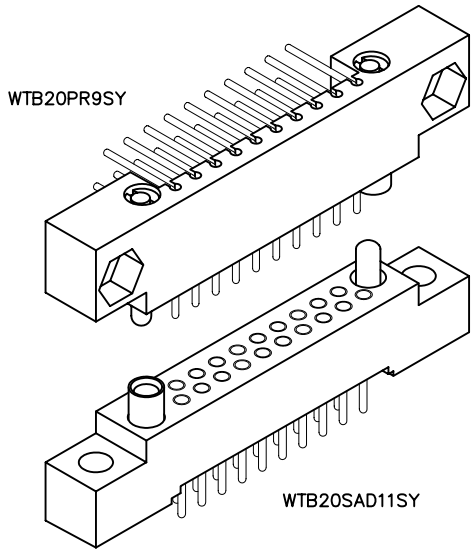

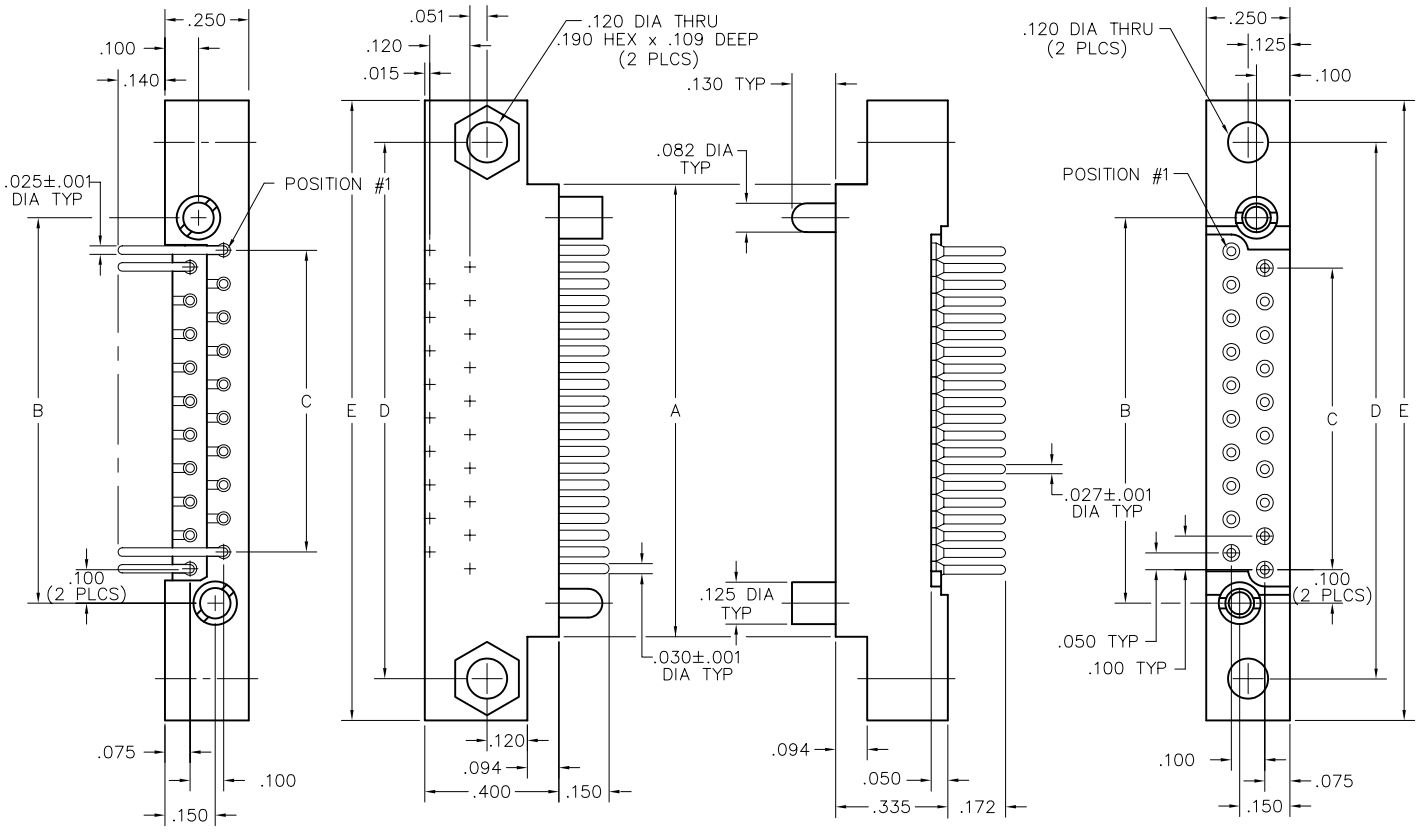

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

PLUG: WTB 20 PR9 SY
RECEPTACLE: WTB 20 SAD11 SY
XXXX XX XXXXX XX

PLUG		RECEPTACLE	
SERIES			
WTB	Plug, right angle, with mounting ears	WTB WTB	Receptacle, straight, with mounting ears Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image. See page W-24 to switch the image.

TYPE CONTACTS/TERMINATIONS:	
PRC	Pin, right angle, solder cup (.035" I.D.)
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PR13	Pin, right angle, dip solder, .203" x .025" dia
PR15	Pin, right angle, dip solder, .234" x .025" dia
PR23	Pin, right angle, dip solder, .359" x .025" dia
PR30	Pin, right angle, dip solder, .470" x .025" dia
PRW33	Pin, right angle, wire wrap®, .515"
PRW40	Pin, right angle, wire wrap®, .625"

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets; order separately or add "Q" in part number. Example: WTB10PR9QJ
  See "Gaskets" in Accessories section for instructions.

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
J	Fixed jackset
JL	Fixed jackset, long

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTB10PR9SY342. Call factory for additional codes.

-342	Remove mounting ears. (.250" each end)
-443	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-515	Contact position noted by dash number is left open (to mate with -443). For right angle connectors only.
-548	Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82	Termination face sealed against conformal coating
-D01	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)
-413	Straight pin contacts in right angle plug molding with solder cup terminations extending .100" from face.

☒ = Option not RoHS compliant


AirBorn


2 · ROW
PC Card to Board or Chassis

.100"

WTB - WTB

90, 100 & 120 Contacts

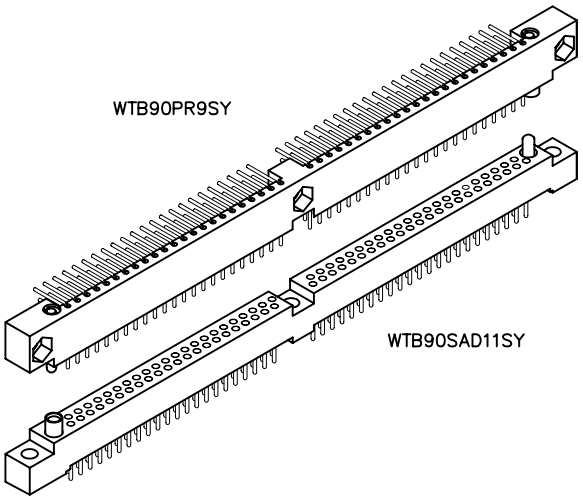

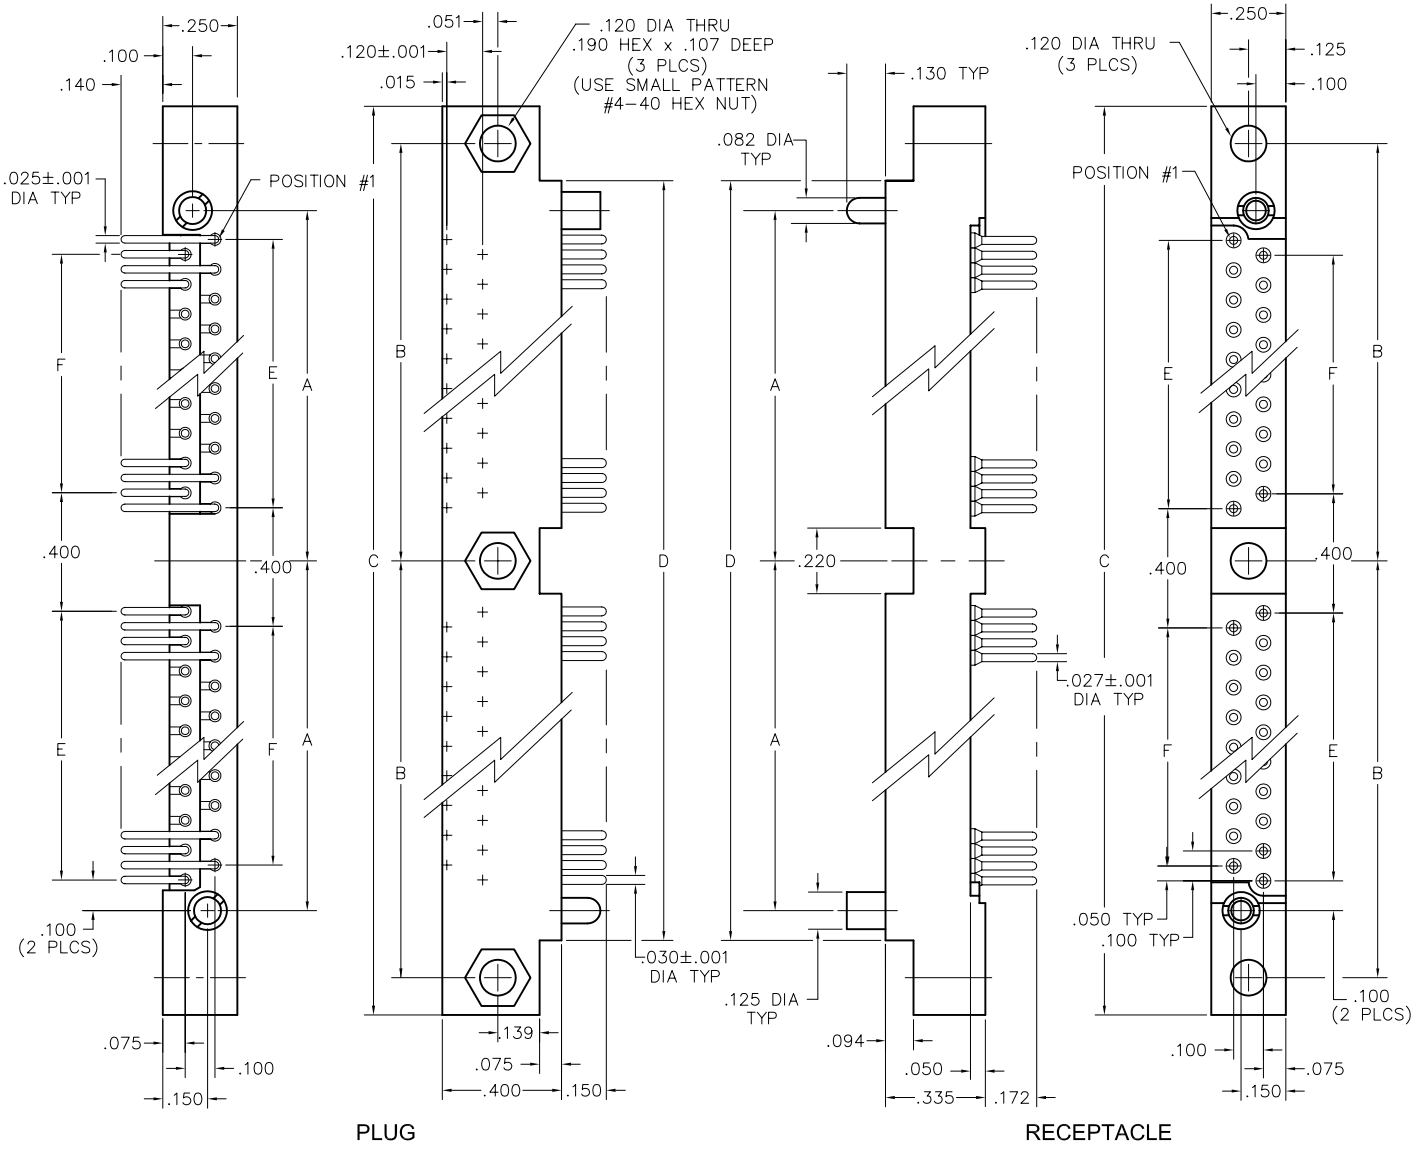

PLUG RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
90	2.475	2.700	5.650	5.150	2.200	2.100
100	2.725	2.950	6.150	5.650	2.400	2.400
120	3.225	3.450	7.150	6.650	2.900	2.900

AirBorn

PLUG: WTB 90 PR9 SY
RECEPTACLE: WTB 90 SAD11 SY
XXXX XX XXXXX XX

PLUG		RECEPTACLE	
SERIES			
WTB	Plug, right angle, with mounting ears	WTB	Receptacle, straight, with mounting ears
		WTB	Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (90, 100, or 120)	XX	Number of contacts (90, 100, or 120)

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image. See page W-24 to switch the image.

PLUG TYPE	CONTACTS/TERMINATIONS:	RECEPTACLE TYPE	CONTACTS/TERMINATIONS:
PRC	Pin, right angle, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PR15	Pin, right angle, dip solder, .234" x .025" dia	SAF3	Socket, straight, flex circuit, .050"
PRW33	Pin, right angle, wire wrap®, .515"	SAF6	Socket, straight, flex circuit, .093"
PRW40	Pin, right angle, wire wrap®, .625"	SAF9	Socket, straight, flex circuit, .140"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAW24	Socket, straight, wire wrap®, .375"
		SAW40	Socket, straight, wire wrap®, .625"
		SOR7	Socket, right angle, dip solder, .109" x .025" dia
		SOR9	Socket, right angle, dip solder, .140" x .025" dia
		SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTB90PR9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.


PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
JT	Turning jackset, .435"	J	Fixed jackset
JTA	Turning jackset, .135"	JL	Fixed jackset, long
JTB	Hex turning jackset, .135"		
JTC	Turning jackset, .435"		
JTL	Turning jackset, long, .635"		

OPTIONS


- Option Codes: Add to the end of the part number. Example: WTB90PR9SY-D01. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-515 Contact position noted by dash number is left open (to mate with -443). For right angle connectors only.
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)
-413 Straight pin contacts in right angle plug molding, with solder cup terminals extending .100" beyond molding.

☒ = Option not RoHS compliant




EXAMPLE: WTB90SOR9SY-C69

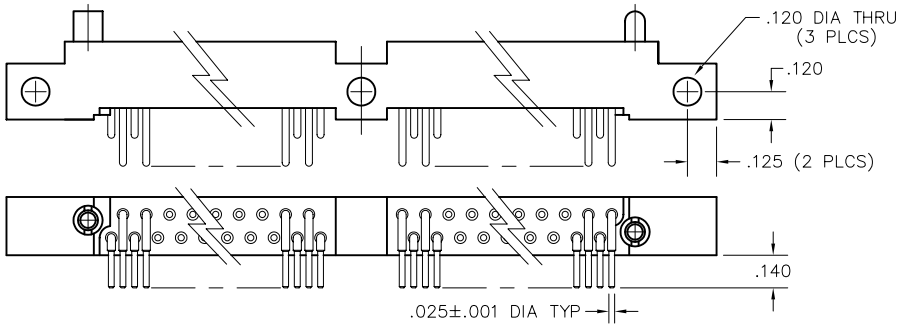


AirBorn

2 · ROW
Sandwich Boards
.100"

WTBV - WTB
10 thru 70 Contacts

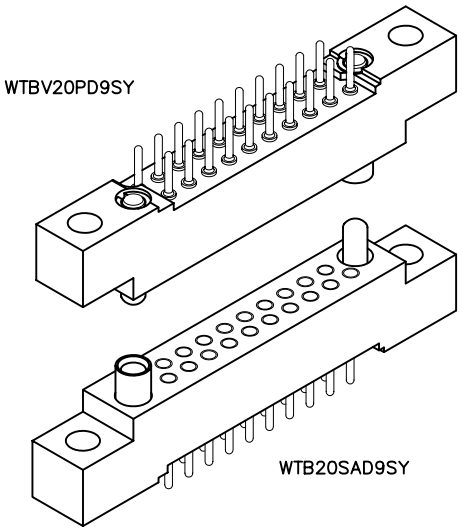

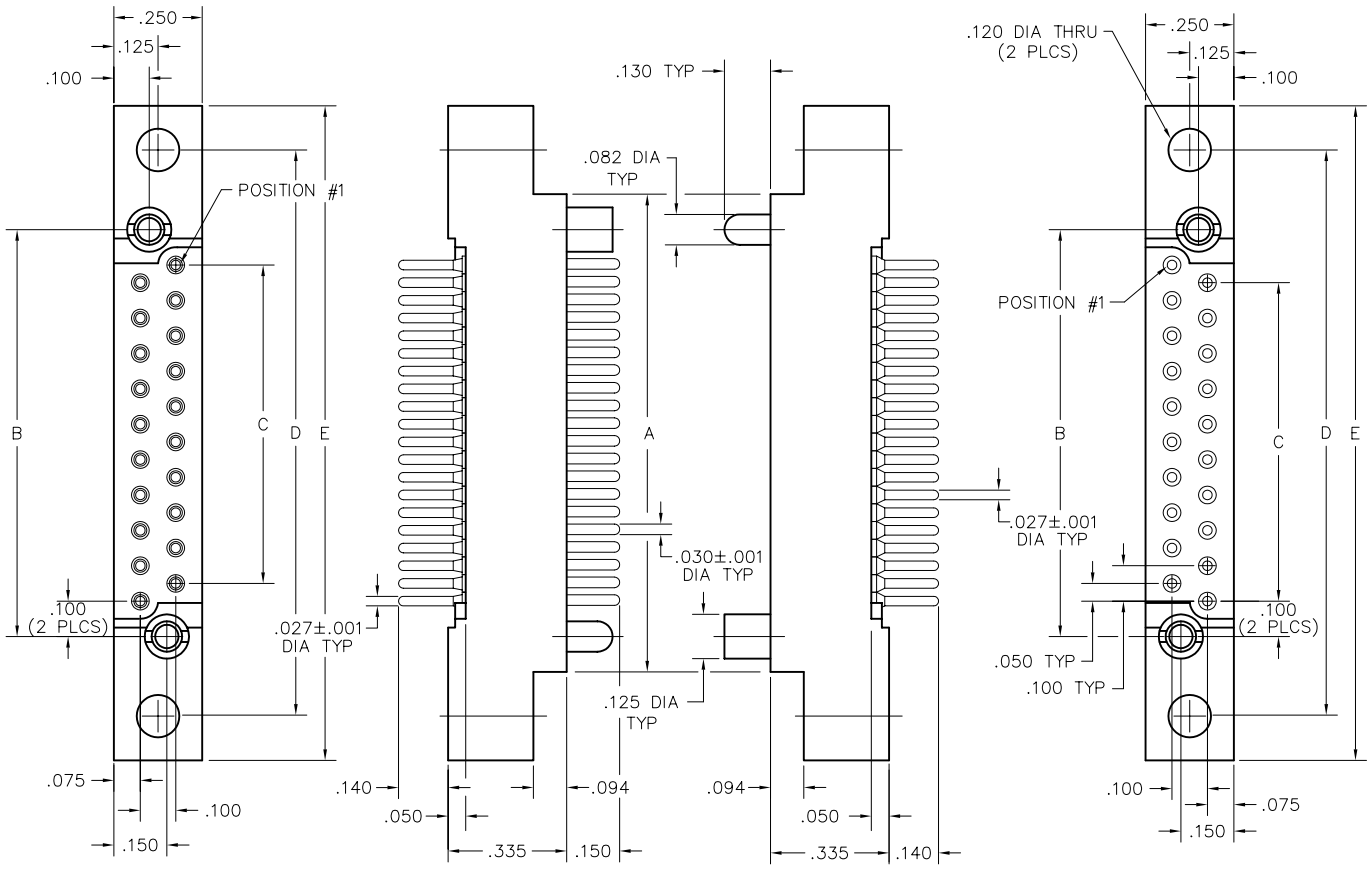

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

PLUG: WTBV 20 PD9 SY
RECEPTACLE: WTB 20 SAD9 SY
XXXX XX XXXX XX

PLUG	RECEPTACLE

SERIES

PLUG		RECEPTACLE	
WTBV	Plug, straight, with mounting ears	WTB	Receptacle, straight, with mounting ears
		WTB	Receptacle, right angle, with mounting ears

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

PLUG TYPE CONTACTS/TERMINATIONS:		RECEPTACLE TYPE CONTACTS/TERMINATIONS:	
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia	SAF3	Socket, straight, flex circuit, .050"
PF3	Pin, straight, flex circuit, .050"	SAF6	Socket, straight, flex circuit, .093"
PF6	Pin, straight, flex circuit, .093"	SAF9	Socket, straight, flex circuit, .140"
PF8	Pin, straight, flex circuit, .125"	SAG7	Socket, straight, dip solder, .109" x .018" dia
PW34	Pin, straight, wire wrap®, .531"	SAG9	Socket, straight, dip solder, .140" x .018" dia
PW40	Pin, straight, wire wrap®, .625"	SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination, .150" (connector saver)
		SAW24	Socket, straight, wire wrap®, .375"
		SAW40	Socket, straight, wire wrap®, .625"
		SOR7	Socket, right angle, dip solder, .109" x .025" dia
		SOR9	Socket, right angle, dip solder, .140" x .025" dia
		SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTBV10PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.


PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
JT	Turning jackset, .500"	J	Fixed jackset
JTA	Turning jackset, .200"	JL	Fixed jackset, long
JTB	Hex turning jackset, .200"		
JTC	Hex turning jackset, .500"		
JTL	Turning jackset, long, .700"		

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTBV20PD9SY-D01. Call factory for additional codes.


-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)


☒ = Option not RoHS compliant

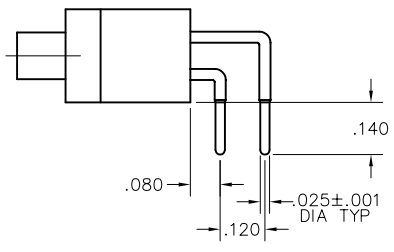

CONTACT OPTION: SOR9

2 · ROW
Sandwich Boards
.100"
WTBV - WTB
90 & 100 Contacts

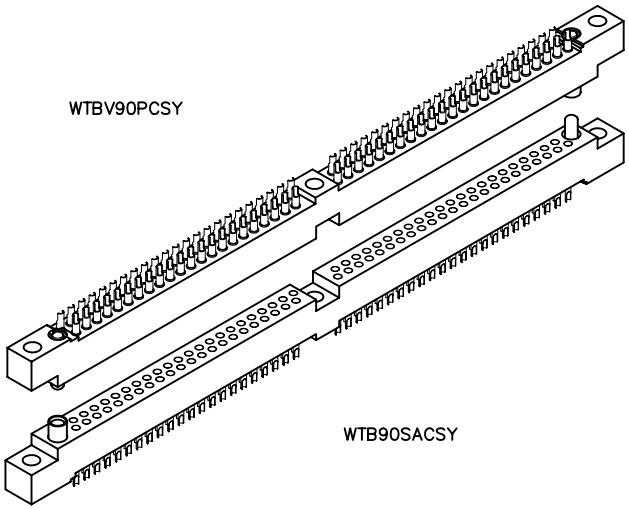

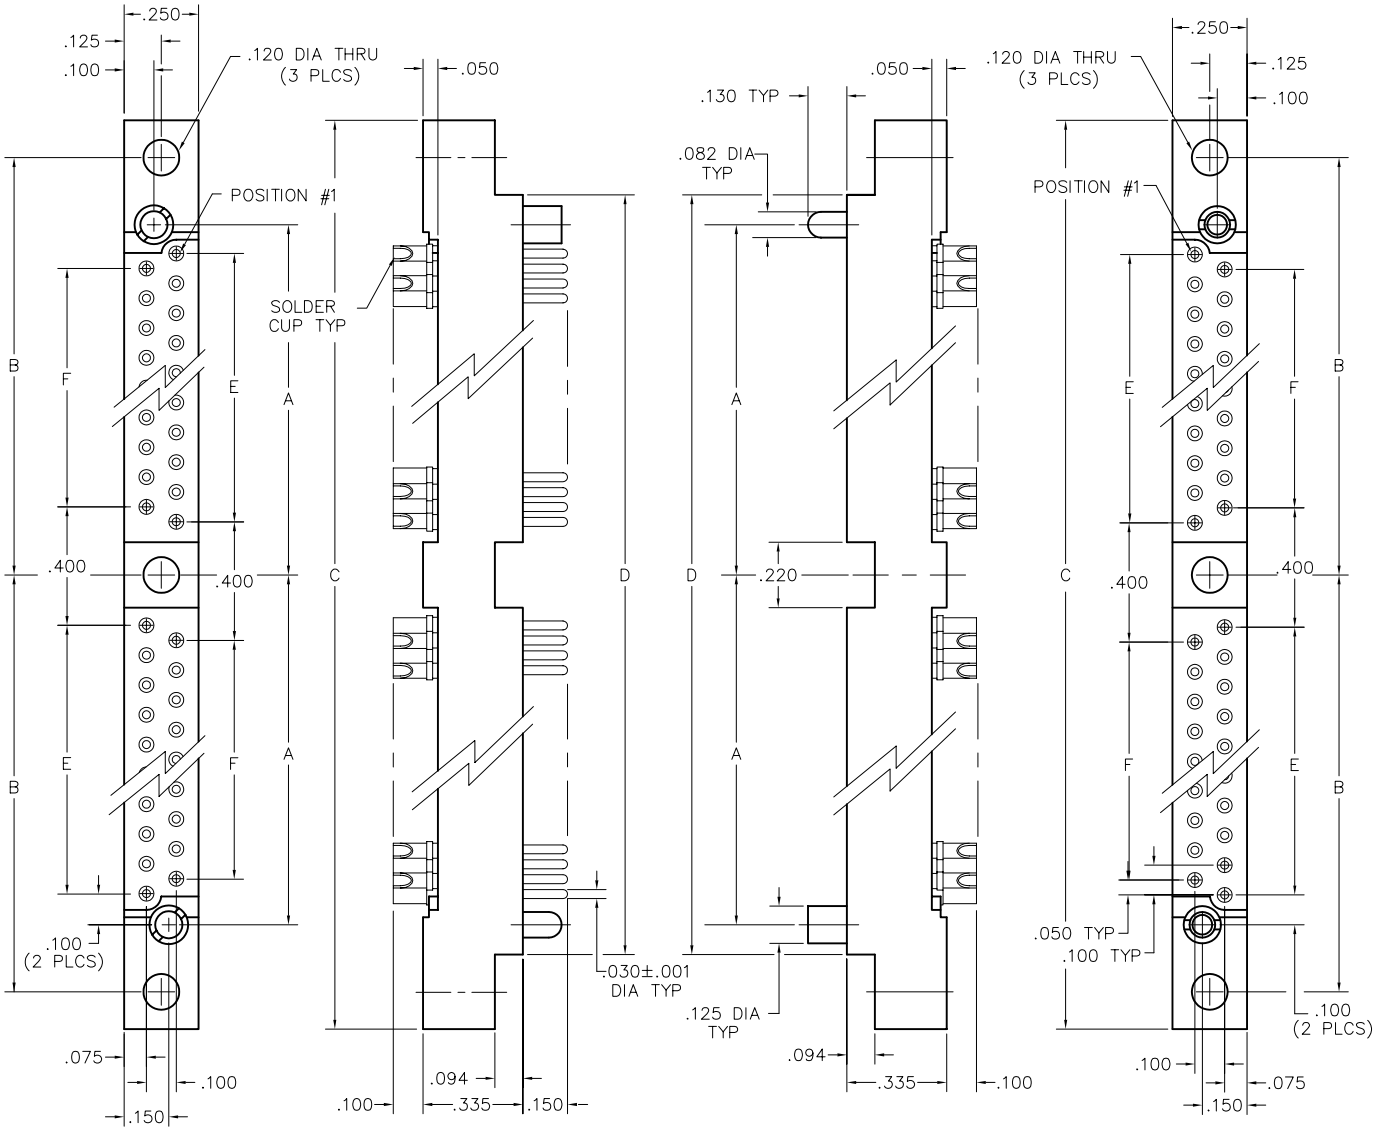

PLUG RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
90	2.475	2.700	5.650	5.150	2.200	2.100
100	2.725	2.950	6.150	5.650	2.400	2.400

Call (972) 931-3200 · Fax (972) 931-9305 www.AirBorn.com

PLUG: WTBV 90 PC SY
RECEPTACLE: WTB 90 SAC SY
XXXX XX XXX XX

PLUG		RECEPTACLE	
SERIES			
WTBV	Plug, straight, with mounting ears	WTB	Receptacle, straight, with mounting ears
		WTB	Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (90 or 100)	XX	Number of contacts (90 or 100)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

TYPE CONTACTS/TERMINATIONS:	
PC	Pin, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia
PF3	Pin, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"
PF8	Pin, straight, flex circuit, .125"
PW34	Pin, straight, wire wrap®, .531"
PW40	Pin, straight, wire wrap®, .625"

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination, .150" (connector saver)
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods: order separately or add "Q" in part number. Example: WTBV90PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
J	Fixed jackset
JL	Fixed jackset, long

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTBV100PD9SY-D01. Call factory for additional codes.

-B82	Termination face sealed against conformal coating
-342	Remove mounting ears (.250" each end)
-D01	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant


AirBorn


2 · ROW
Cable to Board or PC Card

.100"

WTA - WTB

10 thru 70 Contacts

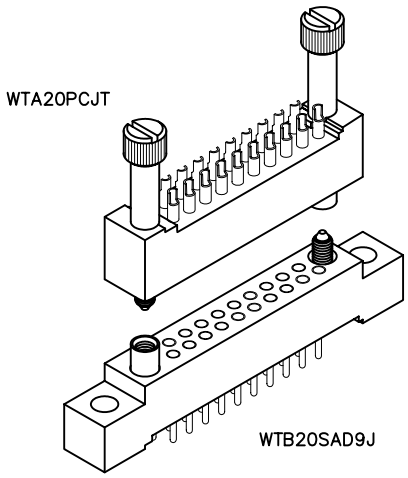

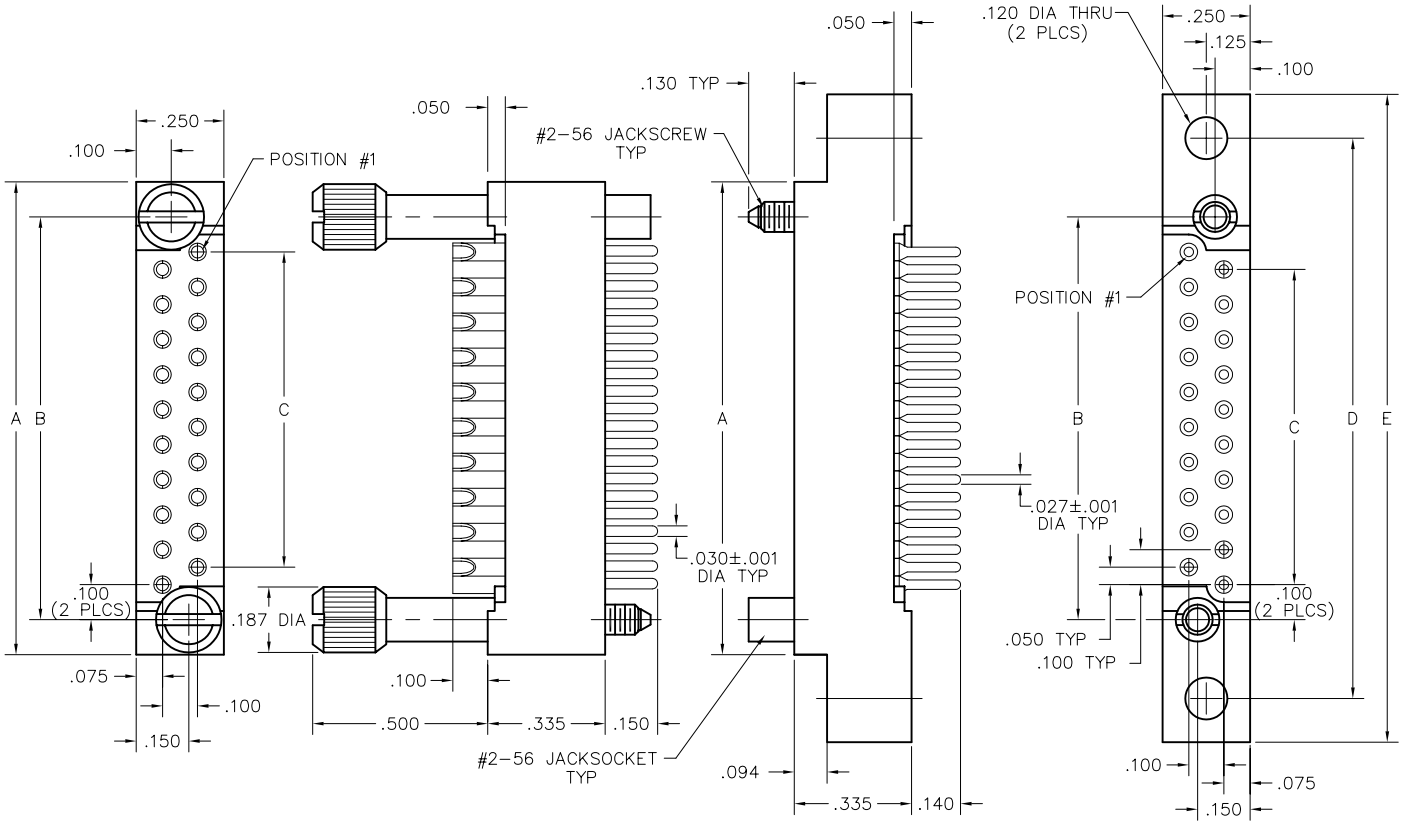

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

PLUG:	WTA	20	PC	JT
RECEPTACLE:	WTB	20	SAD9	J
	XXX	XX	XXXX	XX

PLUG		RECEPTACLE	

SERIES

WTA	Plug, straight, without mounting ears	WTB	Receptacle, straight, with mounting ears
		WTB	Receptacle, right angle, with mounting ears

SIZE

XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- WTA connectors - jackset hardware determines the image. Must specify image with guide set hardware. See page W-17.
- WTB connectors - contacts determine the image. Right angle pin contacts are always plug image, and straight pin or sockets are receptacle image.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

	TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia
PF3	Pin, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"
PF8	Pin, straight, flex circuit, .125"
PW34	Pin, straight, wire wrap®, .531"
PW40	Pin, straight, wire wrap®, .625"

	TYPE CONTACTS/TERMINATIONS:
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination, .150" (connector saver)
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTA10PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

JT	Turning jackset, .500"	J	Fixed jackset
JTA	Turning jackset, .200"	JL	Fixed jackset, long
JTB	Hex turning jackset, .200"		
JTC	Hex turning jackset, .500"		
JTL	Turning jackset, long, .700"		

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTA10SAD9J-D01. Call factory for additional codes.

-B82	Termination face sealed against conformal coating
-342	Remove mounting ears (.250" each end)
-D01	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)


☒ = Option not RoHS compliant


AirBorn

2 · ROW
PC Card to Board or PC Card
.100"

WTB-WTAX

10 thru 70 Contacts

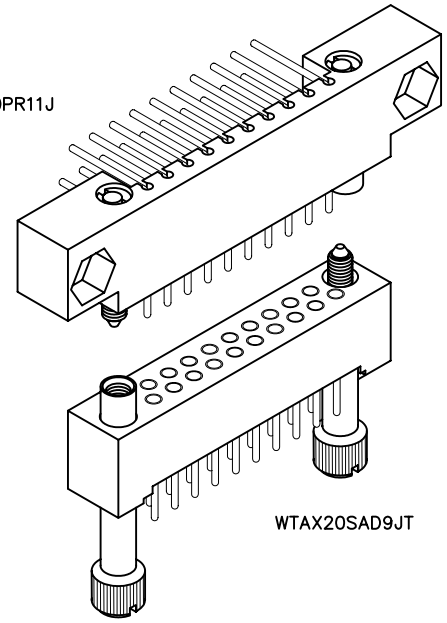

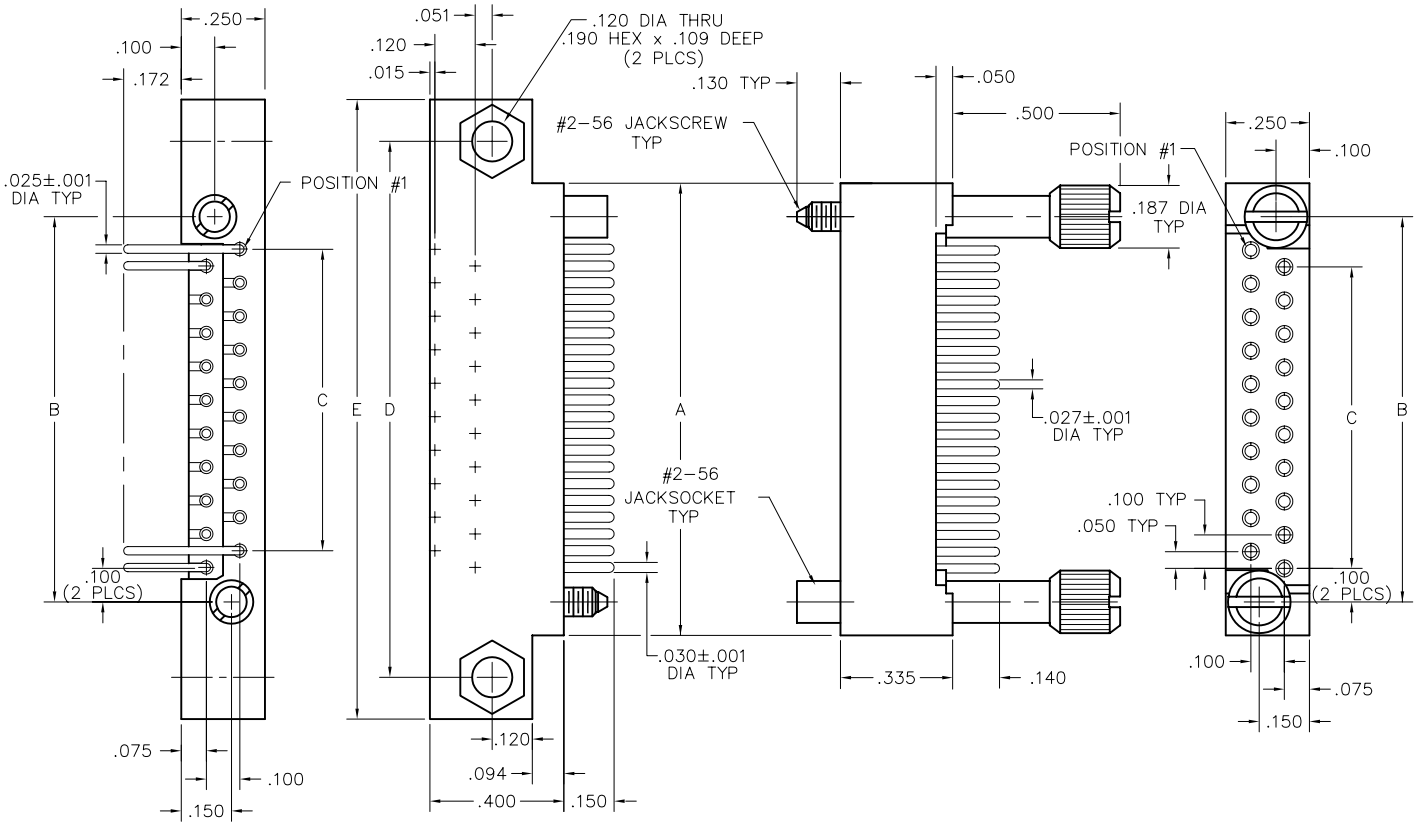

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

AirBorn

PLUG: WTB 20 PR11 J
RECEPTACLE: WTAX 20 SAD9 JT
XXXX XX XXXX XX

PLUG		RECEPTACLE	
SERIES			
WTB	Plug, right angle, with mounting ears	WTAX	Receptacle, straight, without mounting ears
SIZE			
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

	TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PR15	Pin, right angle, dip solder, .234" x .025" dia
PRC	Pin, right angle, solder cup (.035" I.D.)
PRW33	Pin, right angle, wire wrap®, .515"
PRW40	Pin, right angle, wire wrap®, .625"

	TYPE CONTACTS/TERMINATIONS:
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAD15	Socket, straight, dip solder, .234" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination, .150" (connector saver)
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTB20PR11QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
J	Fixed jackset
JL	Fixed jackset, long
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTB10SAD9J-D01. Call factory for additional codes.


-342 Remove mounting ears (.250" each end)
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)
-B82 Termination face sealed against conformal coating. Receptacle connector only.


☒ = Option not RoHS compliant

AirBorn

2 · ROW
PC Card to Chassis
.100"

WTB - WTKA
10 thru 70 Contacts

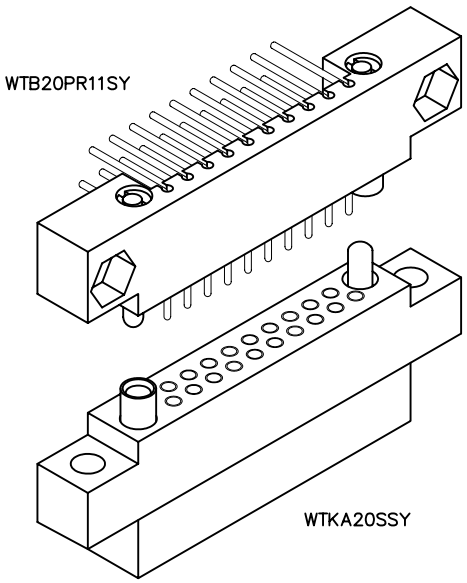

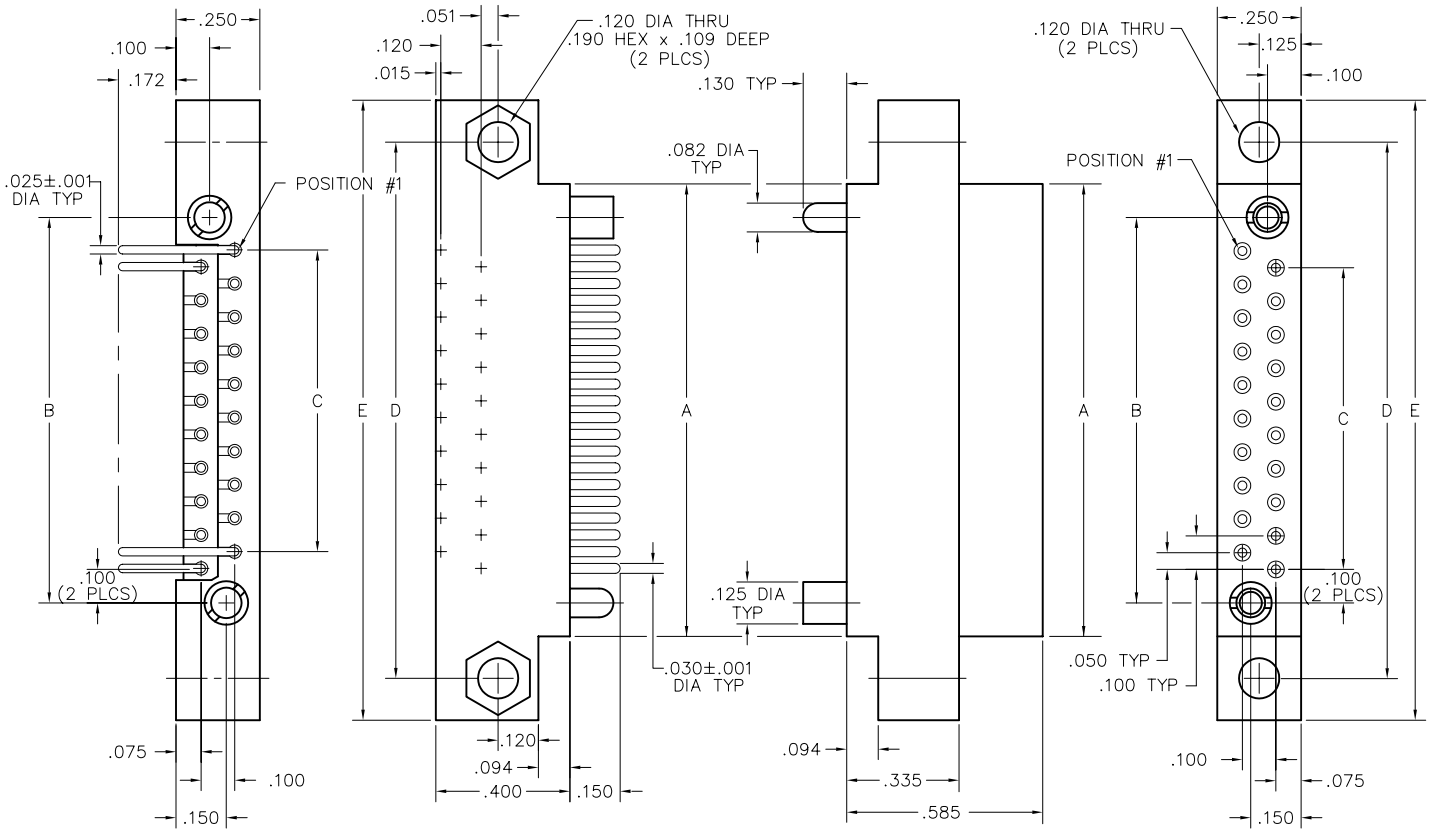

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

PLUG: WTB 20 PR11 SY
RECEPTACLE: WTKA 20 S SY
XXXX XX XXXX XX

PLUG		RECEPTACLE	

SERIES

WTB	Plug, right angle, with mounting ears	WTKA	Receptacle, straight, crimp removable, with mounting ears

- WTKA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WTKA** includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	S	Socket, straight, crimp removable, 22 AWG
PR9	Pin, right angle, dip solder, .140" x .025" dia	SA	Same as above
PR11	Pin, right angle, dip solder, .172" x .025" dia	P	Pin, straight, crimp removable, 22 AWG
PRW40	Pin, right angle, wire wrap®, .625"		


HARDWARE

SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .435"	JT	Turning jackset, .500"
JTA	Turning jackset, .135"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .135"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .435"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .635"	JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTKA10SSY-C45. Call factory for additional codes.

-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-444 Contact position noted by dash number is left open (to mate with -443).
-478 Drill mating side hole diameter designated by dash number.
-515 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68 Combine -C45 and -515 special codes.

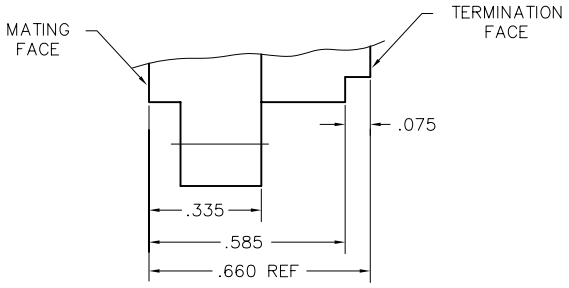



DETAIL A

AirBorn

2 · ROW
PC Card to Chassis
.100"

WTB - WTKA
90 & 120 Contacts

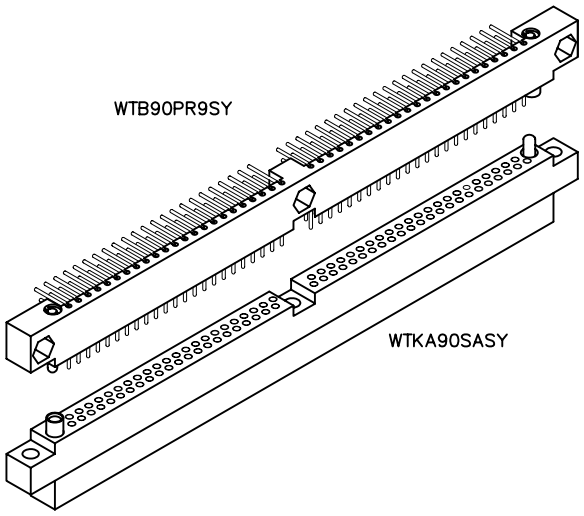

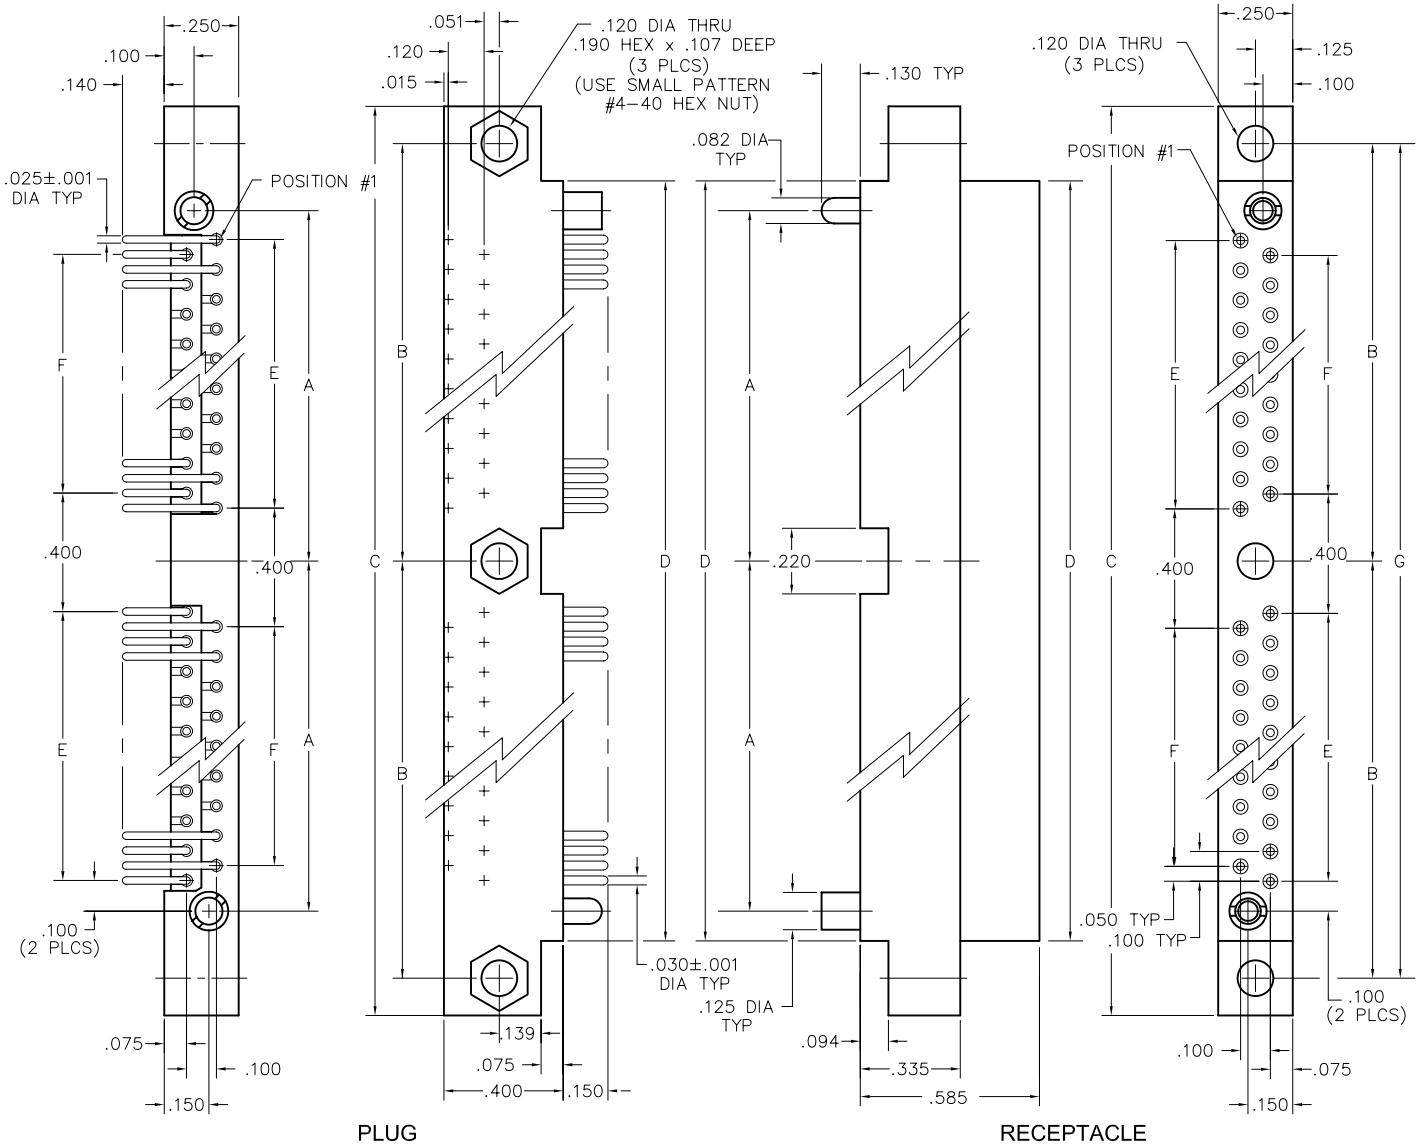

PLUG RECEPTACLE

DIMENSIONS							
SIZE	A	B	C	D	E	F	G
90	2.475	2.700	5.650	5.150	2.200	2.100	5.400
120	3.225	3.450	7.150	6.650	2.900	2.900	6.900

PLUG: WTB 90 PR9 SY
RECEPTACLE: WTKA 90 SA SY
XXXX XX XXX XX

PLUG	RECEPTACLE

SERIES

WTB Plug, right angle, with mounting ears	WTKA Receptacle, straight, crimp removable, with mounting ears

- WTKA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

XX Number of contacts (90 or 120)	XX Number of contacts (90 or 120)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WTKA** includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PRW40	Pin, right angle, wire wrap®, .625"

TYPE CONTACTS/TERMINATIONS:	
S	Socket, straight, crimp removable, 22 AWG
SA	Same as above
P	Pin, straight, crimp removable, 22 AWG

HARDWARE


SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"

SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"


OPTIONS

- Option Codes: Add to the end of the part number. Example: WTKA10SSY-C45. Call factory for additional codes.


-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-444 Contact position noted by dash number is left open (to mate with -443). Right angle only.
-478 Drill mating side hole diameter designated by dash number (crimp only).
-515 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68 Combine -C45 and -515 special codes.

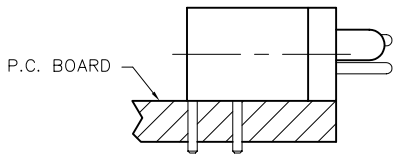


WTB90PR9SY
P.C. BOARD EXAMPLE

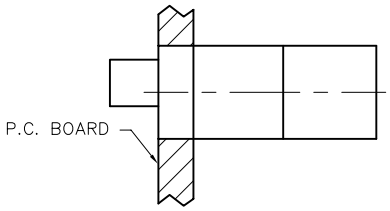

WTKA90SASY
CHASSIS EXAMPLE



WTB90PRW40SY
WIRE WRAP EXAMPLE

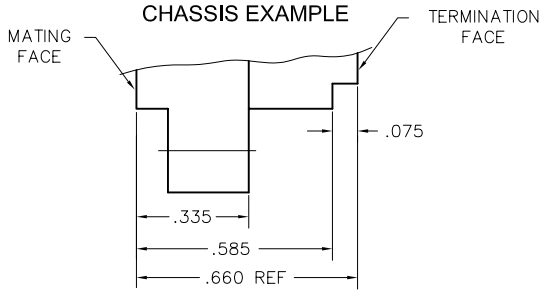

DETAIL A


AirBorn


2 · ROW
Chassis to Chassis

.100"

WTKVA - WTKA

10 thru 70 Contacts

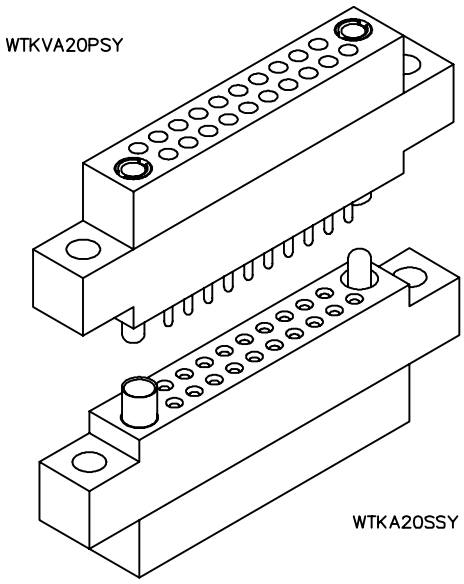

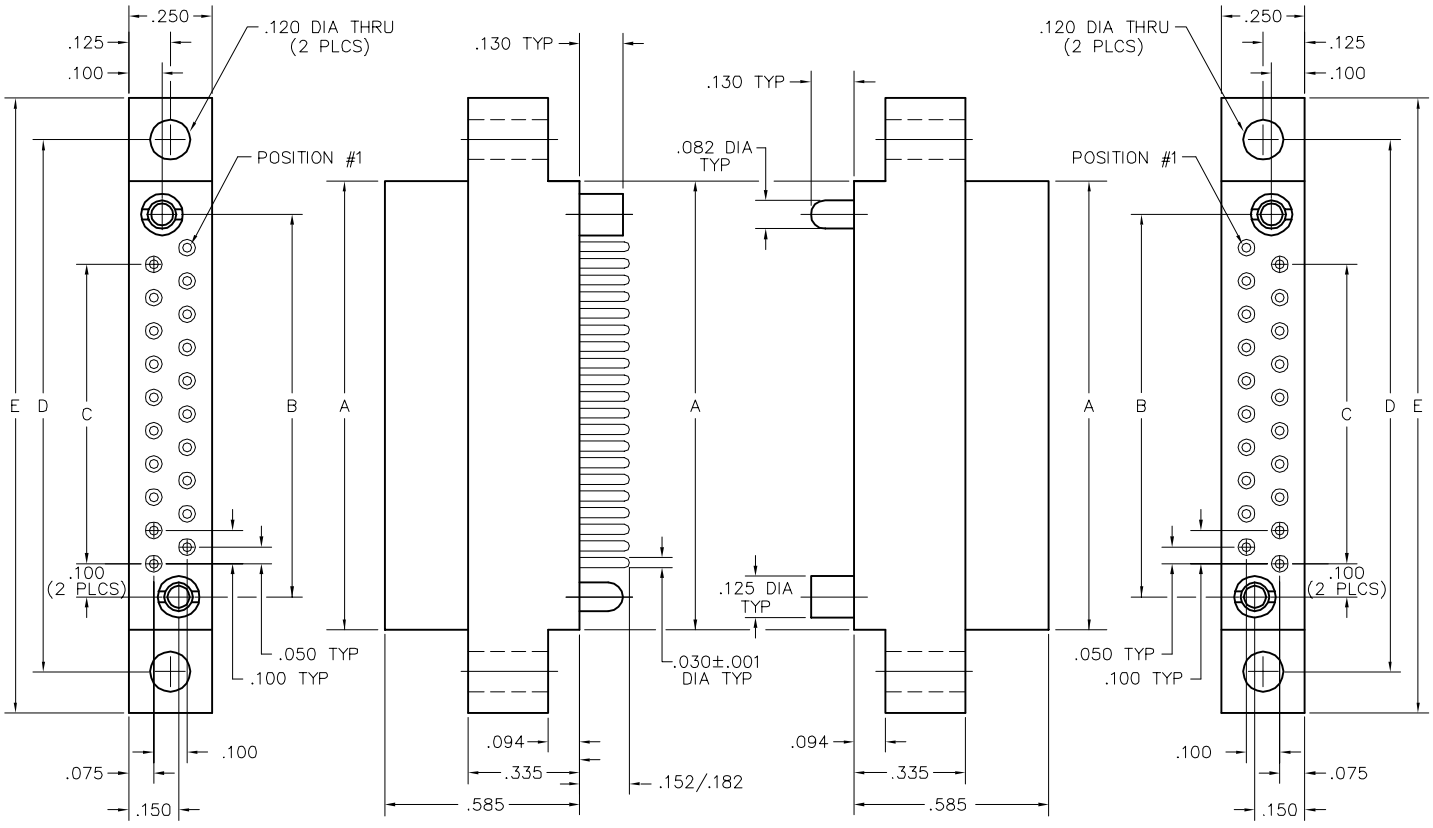

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

PLUG: WTKVA 20 P SY
RECEPTACLE: WTKA 20 S SY
XXXX XX XXXX XX

PLUG	RECEPTACLE

SERIES

PLUG	RECEPTACLE
WTKVA Plug, straight, crimp removable, with mounting ears	WTKA Receptacle, straight, crimp removable, with mounting ears

- WTKVA and WTKA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

PLUG	RECEPTACLE
XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The use of gaskets is not recommended with crimp connectors.
- WTKVA** and WTKA includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

PLUG	TYPE CONTACTS/TERMINATIONS:	RECEPTACLE	TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, crimp removable, 22 AWG	S	Socket, straight, crimp removable, 22 AWG
S	Socket, straight, crimp removable, 22 AWG	SA	Same as above
SA	Same as above	P	Pin, straight, crimp removable, 22 AWG


HARDWARE

PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .435"	JT	Turning jackset, .500"
JTA	Turning jackset, .135"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .135"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .435"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .635"	JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTKA10SSY-C45. Call factory for additional codes.

-443	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444	Contact position noted by dash number is left open (to mate with -443).
-478	Drill mating side hole diameter designated by dash number.
-515	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-A53	20 AWG, straight, crimp removable contact, pin or socket.
-C45	Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68	Combine -C45 and -515 special codes.

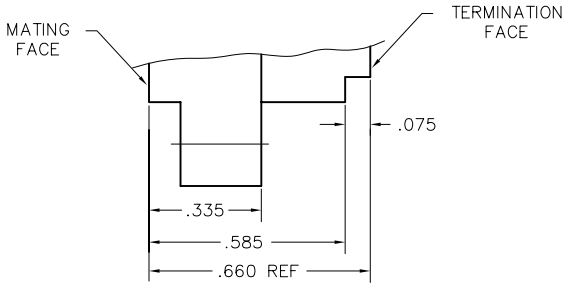


DETAIL A


AirBorn

2 · ROW
PC Card to Board
.100"

WTB - WTDXA

10 thru 70 Contacts

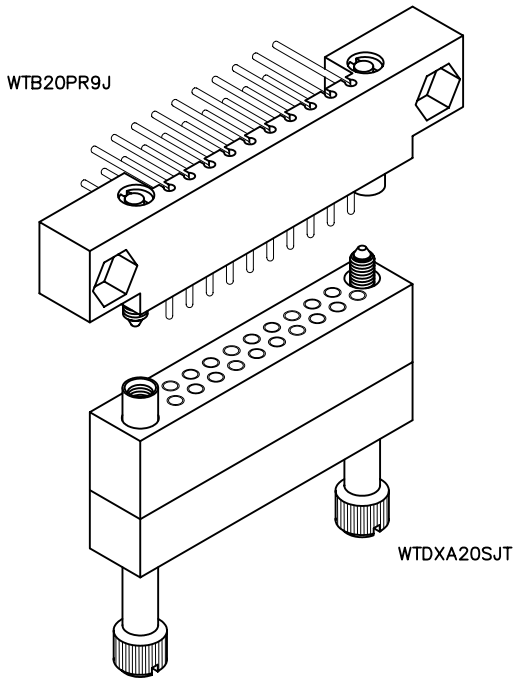

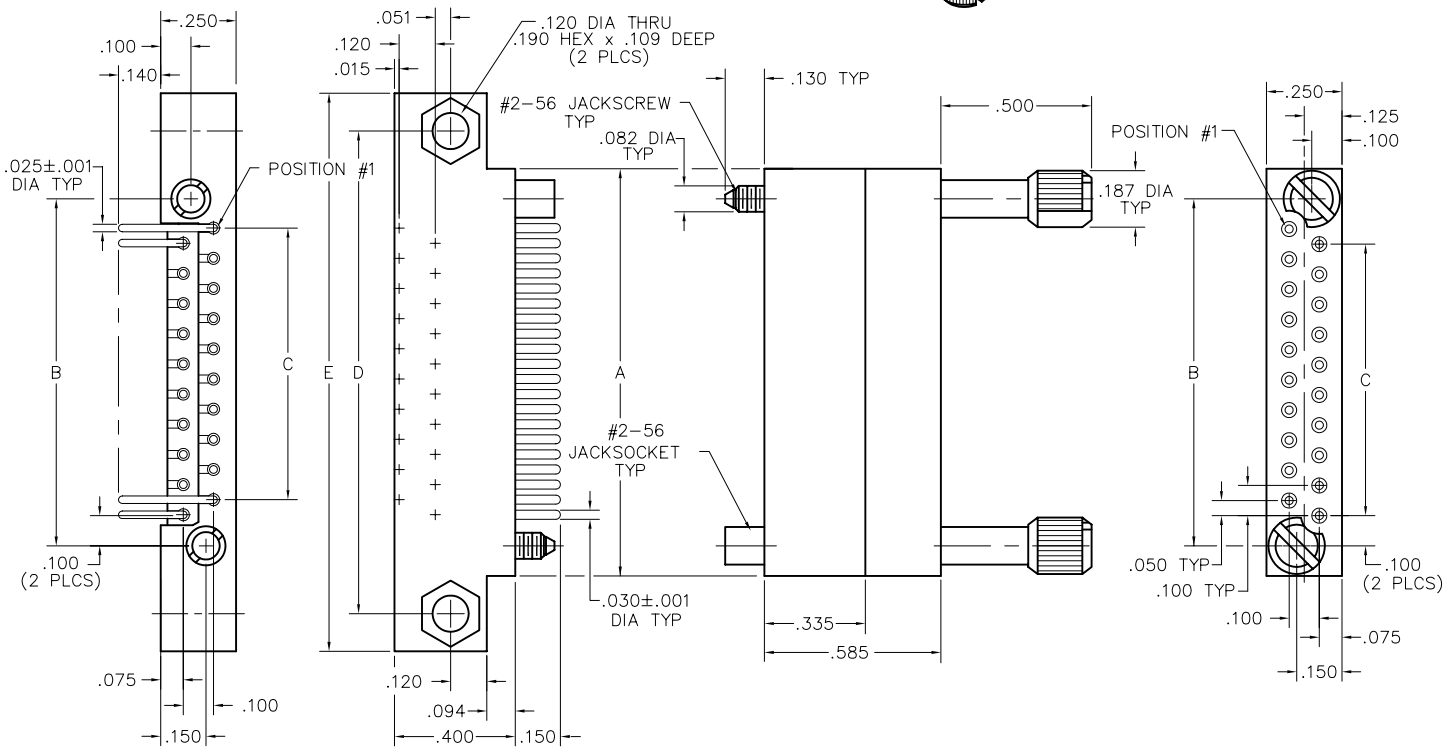

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

PLUG: WTB 20 PR9 J
RECEPTACLE: WTDXA 20 S JT
XXXXX XX XXX XX

PLUG	RECEPTACLE

SERIES

WTB Plug, right angle, with mounting ears	WTDXA Receptacle, straight, crimp removable, without mounting ears

- WTKA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WTKA** includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PRW40	Pin, right angle, wire wrap®, .625"

TYPE CONTACTS/TERMINATIONS:	
S	Socket, straight, crimp removable, 22 AWG
SA	Same as above
P	Pin, straight, crimp removable, 22 AWG

HARDWARE


SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"

SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTKA10SSY-C45. Call factory for additional codes.

-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-444 Contact position noted by dash number is left open (to mate with -443). Right angle only.
-478 Drill mating side hole diameter designated by dash number.
-515 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68 Combine -C45 and -515 special codes.

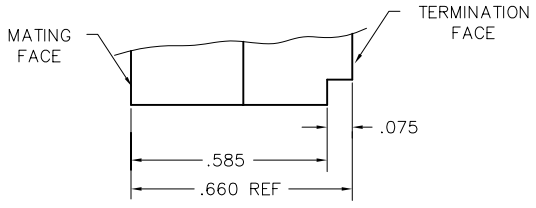



DETAIL A

AirBorn

2 · ROW
PC Card to Board
.100"

WTB - WTDXA
90 & 120 Contacts

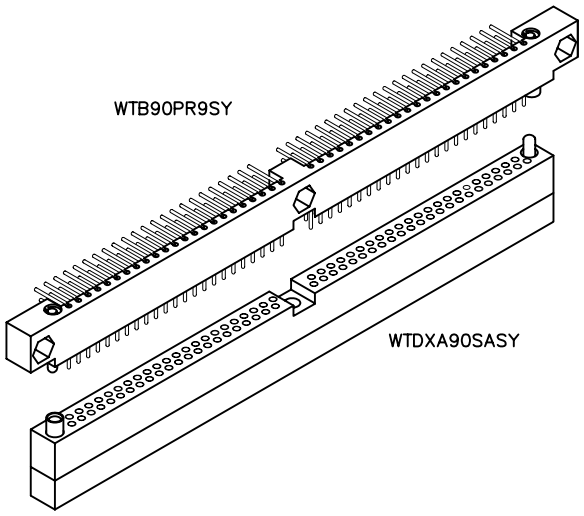

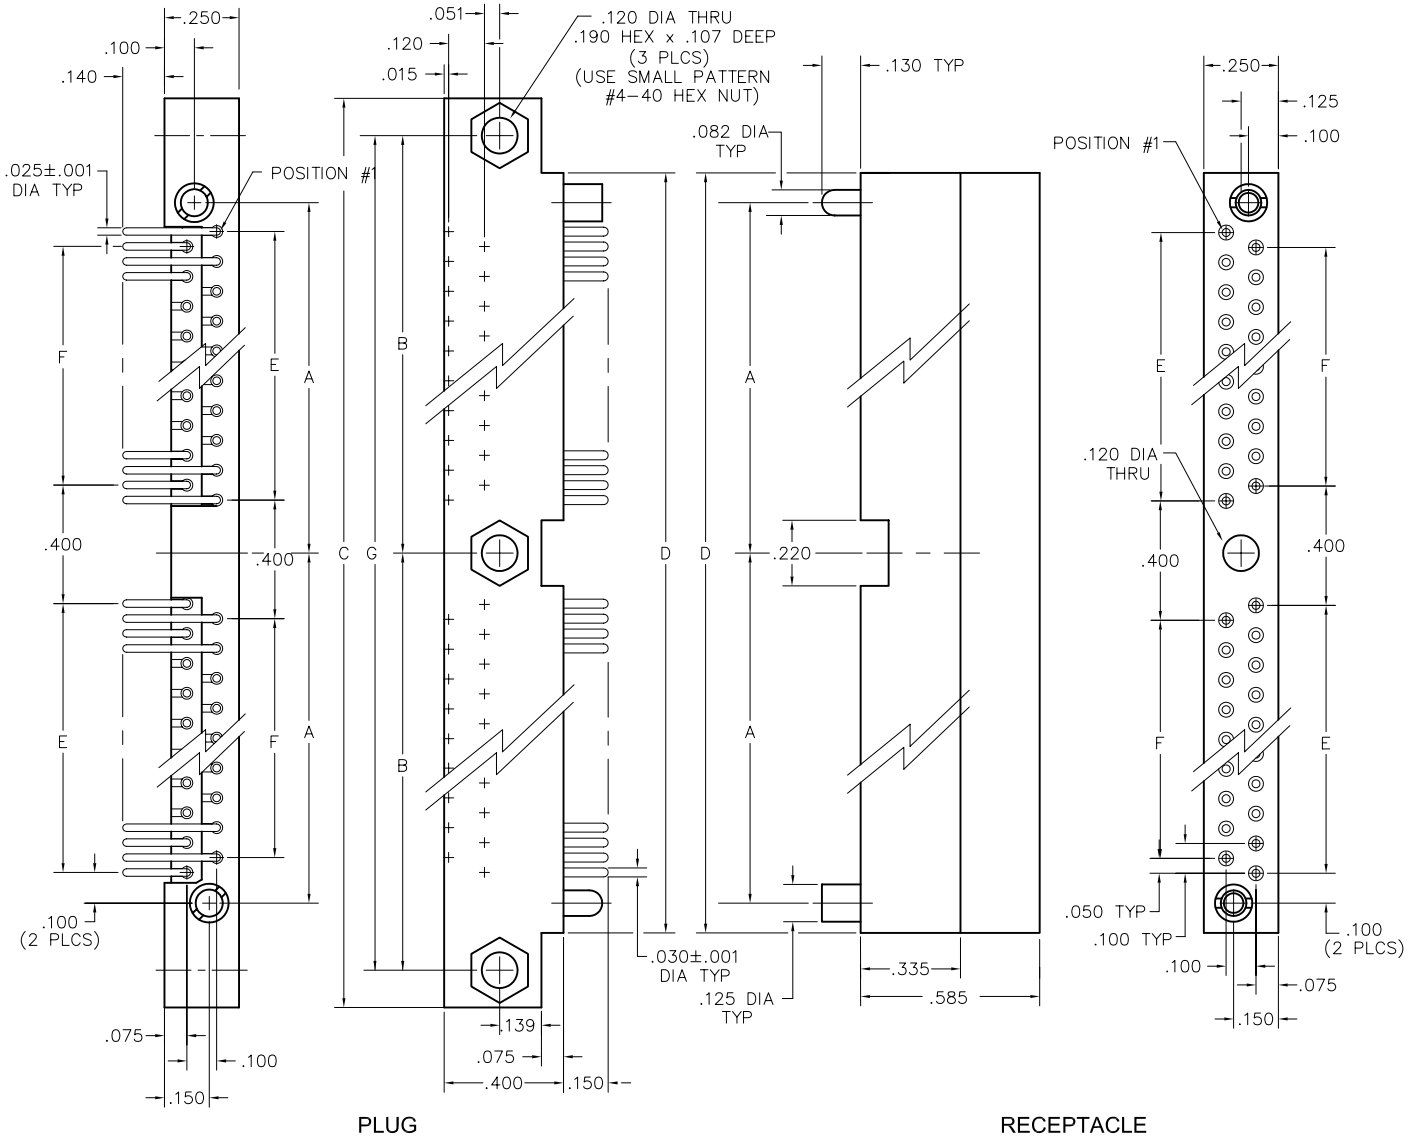

PLUG RECEPTACLE

DIMENSIONS							
SIZE	A	B	C	D	E	F	G
90	2.475	2.700	5.560	5.150	2.200	2.100	5.400
120	3.225	3.450	7.150	6.650	2.900	2.900	6.900

PLUG: WTB 90 PR9 SY
RECEPTACLE: WTDXA 90 SA SY
XXXXX XX XXX XX

PLUG	RECEPTACLE

SERIES

WTB Plug, right angle, with mounting ears	WTDXA Receptacle, straight, crimp removable, without mounting ears

- WTKA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

XX Number of contacts (90 or 120)	XX Number of contacts (90 or 120)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WTKA** includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PRW40	Pin, right angle, wire wrap®, .625"

TYPE CONTACTS/TERMINATIONS:	
S	Socket, straight, crimp removable, 22 AWG
SA	Same as above
P	Pin, straight, crimp removable, 22 AWG

HARDWARE


SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"

SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"


OPTIONS

- Option Codes: Add to the end of the part number. Example: WTDXA90SSY-C45. Call factory for additional codes.


-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-444 Contact position noted by dash number is left open (to mate with -443). Right angle only.
-478 Drill mating side hole diameter designated by dash number (crimp only).
-515 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68 Combine -C45 and -515 special codes.

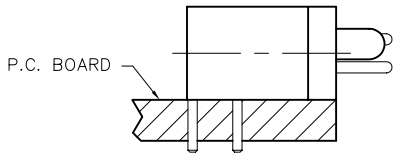


WTB90PR9SY
P.C. BOARD EXAMPLE

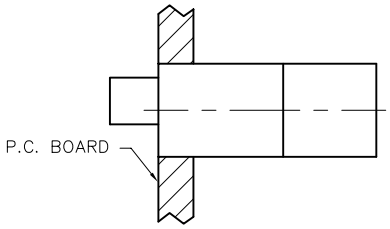

WTDXA90SASY
CHASSIS EXAMPLE



WTB90PRW40SY
WIRE WRAP EXAMPLE

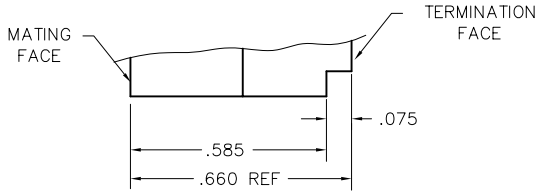



DETAIL A

2 · ROW
Chassis to Chassis
.100"

WTDVA - WTDXA

10 thru 70 Contacts

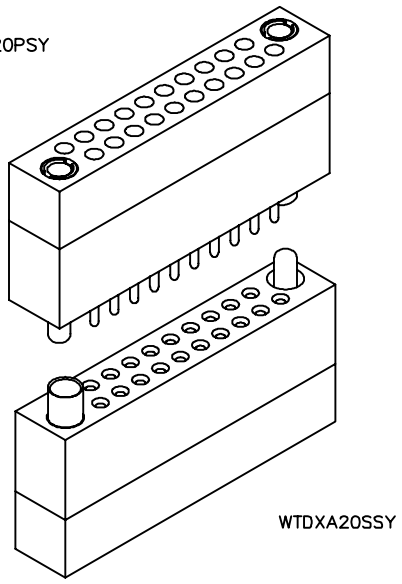

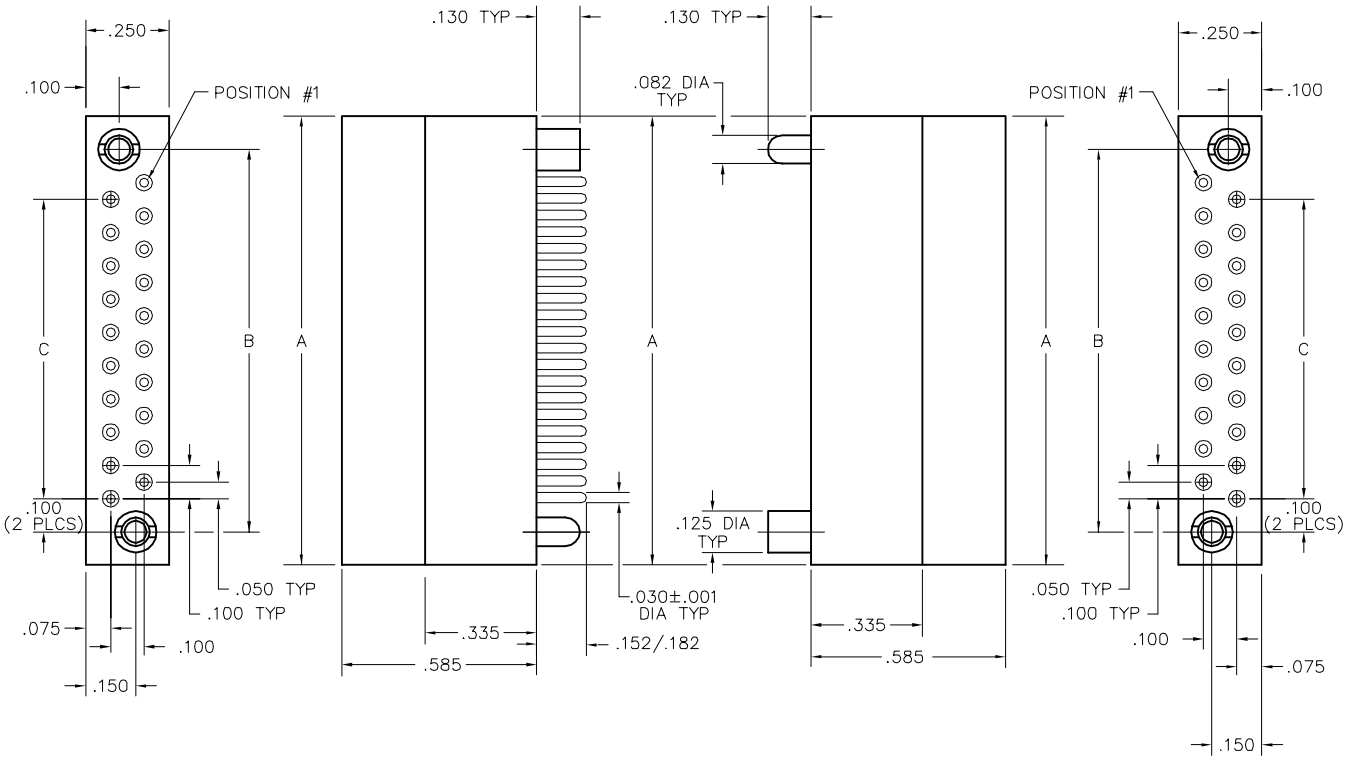

PLUG RECEPTACLE

DIMENSIONS							
SIZE	A	B	C	SIZE	A	B	C
10	.850	.650	.400	44	2.550	2.350	2.100
14	1.050	.850	.600	50	2.850	2.650	2.400
20	1.350	1.150	.900	54	3.050	2.850	2.600
24	1.550	1.350	1.100	56	3.150	2.950	2.700
26	1.650	1.450	1.200	60	3.350	3.150	2.900
30	1.850	1.650	1.400	66	3.650	3.450	3.200
36	2.150	1.950	1.700	70	3.850	3.650	3.400
40	2.350	2.150	1.900				

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

PLUG: WTDVA 20 P SY
RECEPTACLE: WTDXA 20 S SY
XXXX XX XXXX XX

PLUG	RECEPTACLE

SERIES

WTDVA Plug, straight, crimp removable, without mounting ears	WTDXA Receptacle, straight, crimp removable, without mounting ears

- WTDVA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The use of gaskets is not recommended with crimp connectors.
- WTDVA** and WTDXA includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, crimp removable, 22 AWG	S	Socket, straight, crimp removable, 22 AWG
S	Socket, straight, crimp removable, 22 AWG	SA	Same as above
SA	Same as above	P	Pin, straight, crimp removable, 22 AWG


HARDWARE

SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .435"	JT	Turning jackset, .500"
JTA	Turning jackset, .135"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .135"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .435"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .635"	JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTDXA10SSY-C45. Call factory for additional codes.

-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444 Contact position noted by dash number is left open (to mate with -443).
-478 Drill mating side hole diameter designated by dash number.
-515 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-A53 20 AWG, straight, crimp removable contact, pin or socket.
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68 Combine -C45 and -515 special codes.

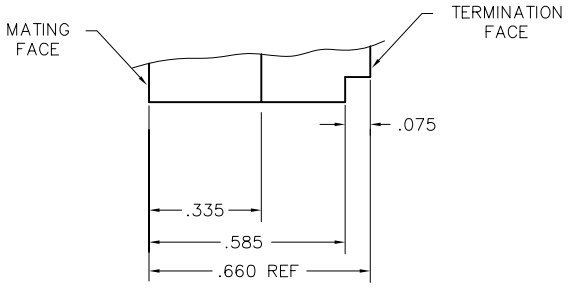


DETAIL A


2 · ROW
Extender Board Connector*

.100"

WTBT

10 thru 70 Contacts

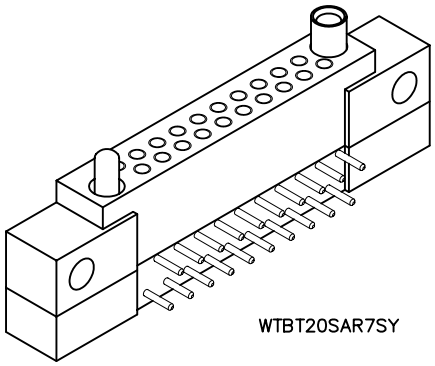

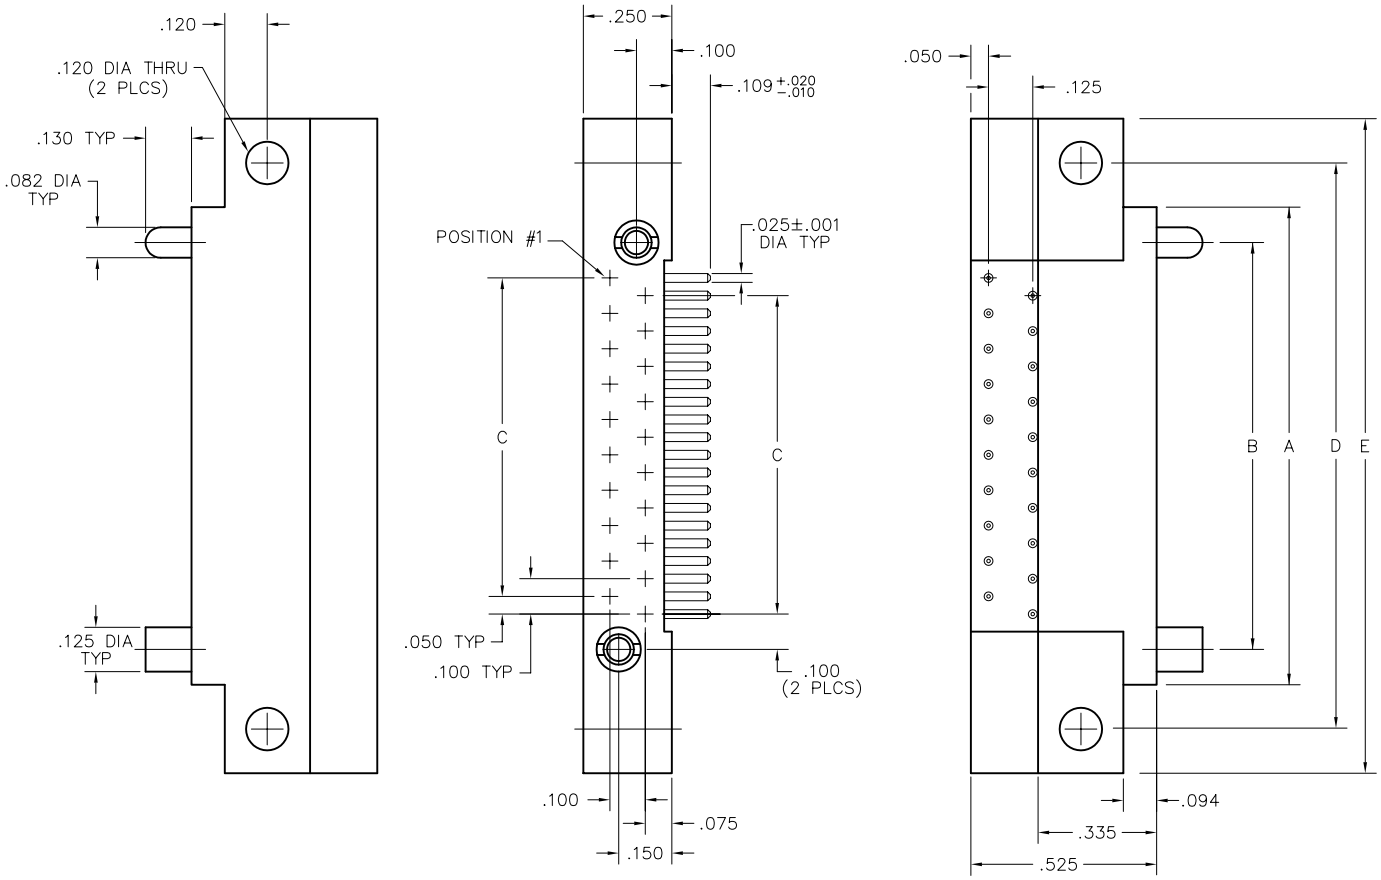

RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

* = FOR TEST APPLICATIONS

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

RECEPTACLE: WTBT 20 SAR7 SY
XXXX XX XXXX XX

RECEPTACLE

SERIES

WTBT Receptacle, right angle, with mounting ears

SIZE

XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

TYPE CONTACTS/TERMINATIONS:

SARC Socket, right angle, solder cup (.035" I.D.)
SAR7 Socket, right angle, dip solder, .109" x .025" dia
SAR9 Socket, right angle, dip solder, .140" x .025" dia
SAR11 Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

SY Guide set
J Fixed jackset
JT Turning jackset, .475"
JTA Turning jackset, .175"
JTB Hex turning jackset, .175"
JTC Hex turning jackset, .475"
JTL Turning jackset, long, .675"


- WTBT connectors with "J" hardware will mate with: WTA*****JT
  WTA*****JTA
- WTBT connectors with "SY" hardware will mate with: WTB*****SY
  WTAV*****SY
- For polarized "D" shaped guides, add dash and code number to the part number (example: -7). See "Polarization" in Accessories section for codes.

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTBT10SAR9J-D01. Call factory for additional codes.

-342 Remove mounting ears (.250" each end)
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant

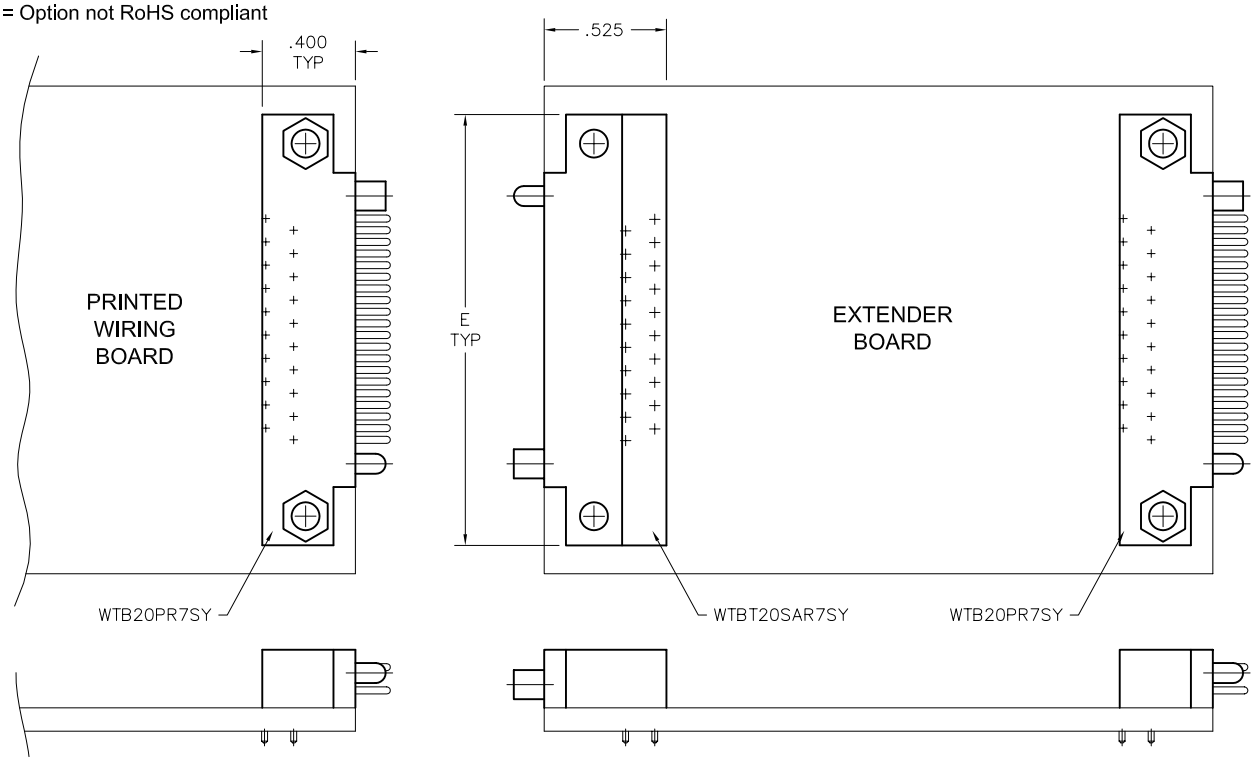


AirBorn

2 • ROW
Extender Board Connector*


.100"

WTBT

100 Contacts

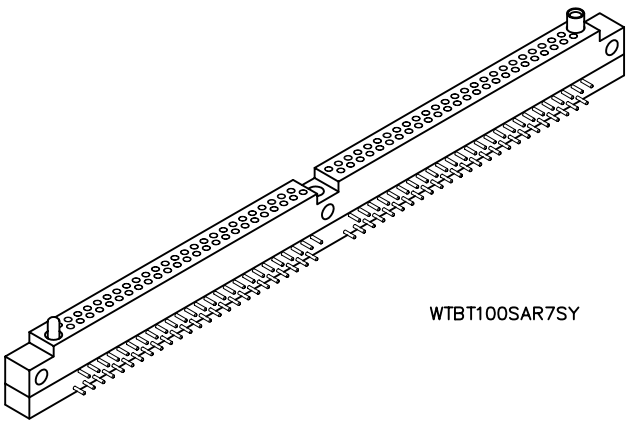

WTBT100SAR7SY

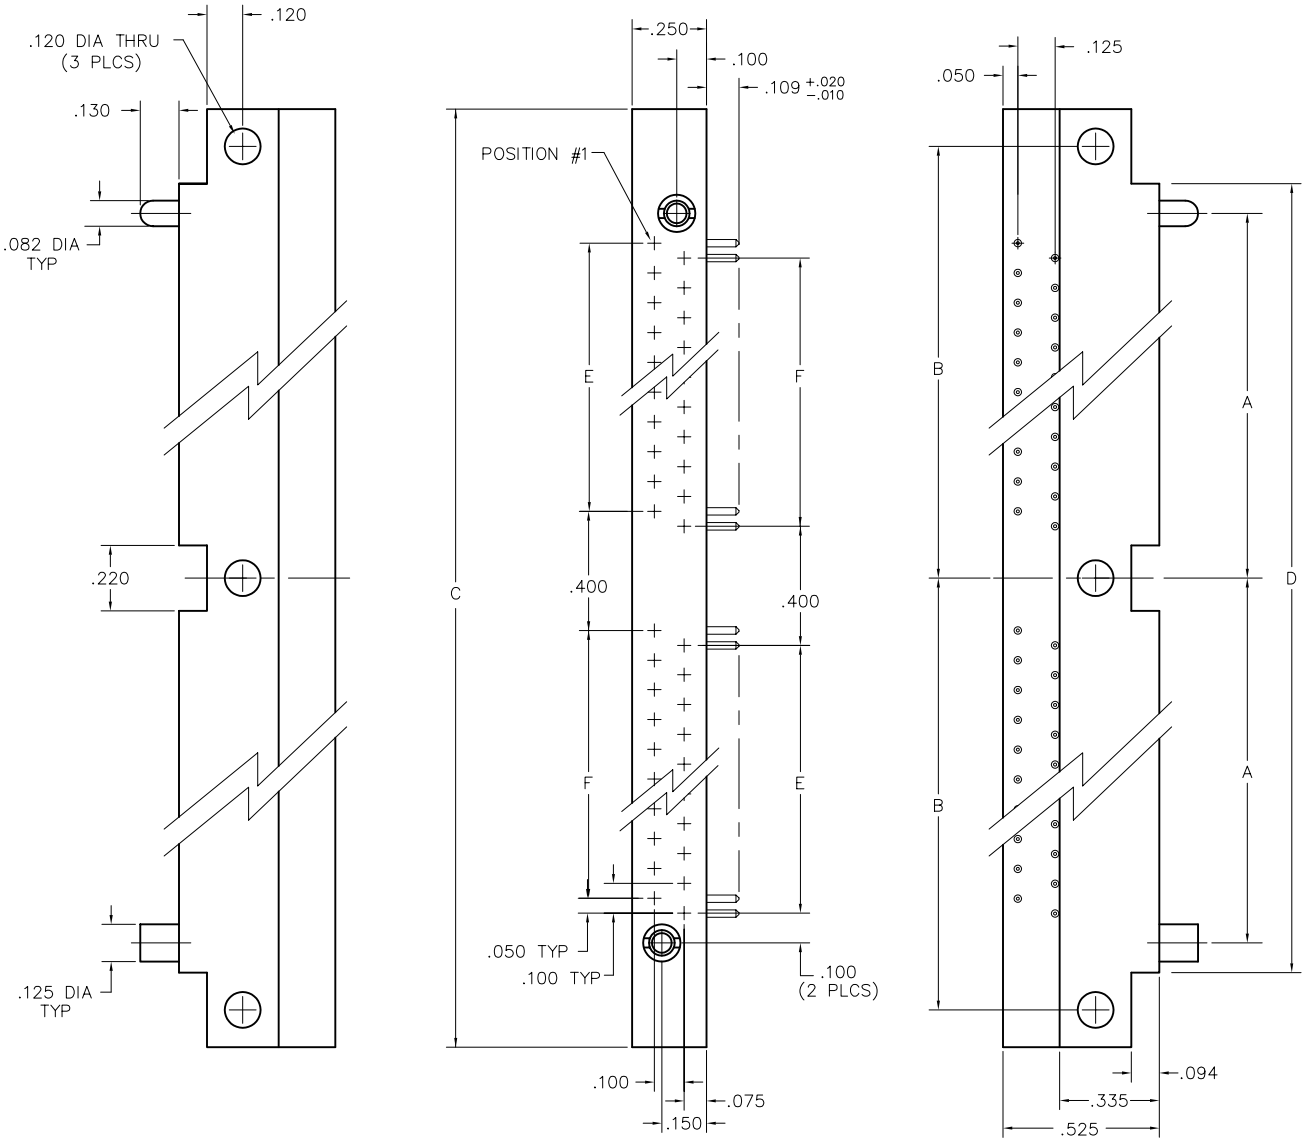

RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
100	2.725	2.950	6.150	5.650	2.400	2.400

* = FOR TEST APPLICATIONS

RECEPTACLE: WTBT 100 SAR7 SY
XXXX XXX XXXX XX

RECEPTACLE

SERIES

WTBT Receptacle, right angle, with mounting ears
- WTBT connectors will mate with WTA, WTAV, WTB, WTBV.

SIZE

XXX Number of contacts (100)

CONTACTS

TYPE CONTACTS/TERMINATIONS:

SAR7 Socket, right angle, dip solder, .109" x .025" dia
SAR9 Socket, right angle, dip solder, .140" x .025" dia
SAR11 Socket, right angle, dip solder, .172" x .025" dia
SARC Socket, right angle, solder cup (.035" I.D.)

HARDWARE


SY Guide set
SY-# Guide set, polarized
J Fixed jackset
JT Turning jackset, .475"
JTA Turning jackset, .175"
JTB Hex turning jackset, .175"
JTC Hex turning jackset, .475"
JTL Long turning jackset, .675"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTBT100SAR7SY342. Call factory for additional codes.

-342 Remove mounting ears (.250" each end)
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant

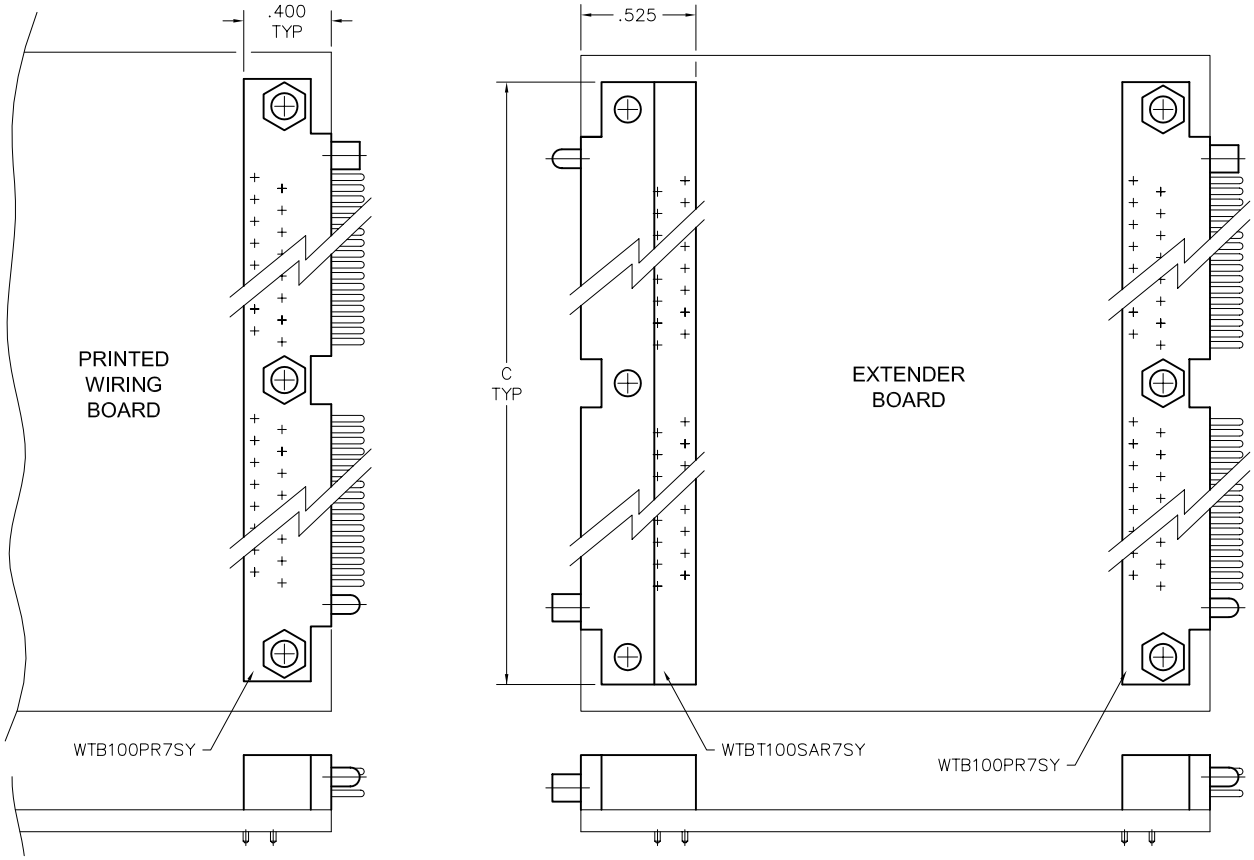

AirBorn


3 · ROW


PC Card to Board or Chassis

.100"

WG - WG

50 thru 104 Contacts

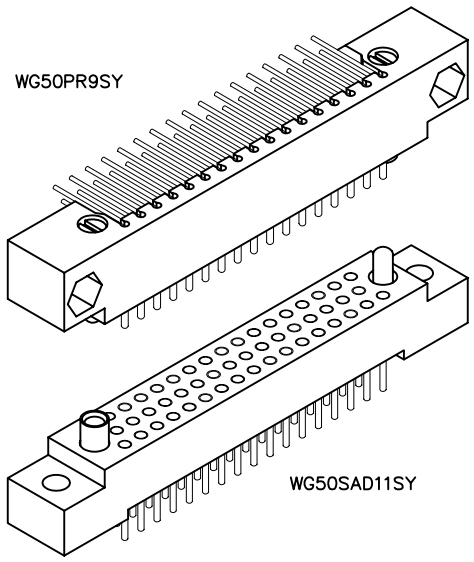

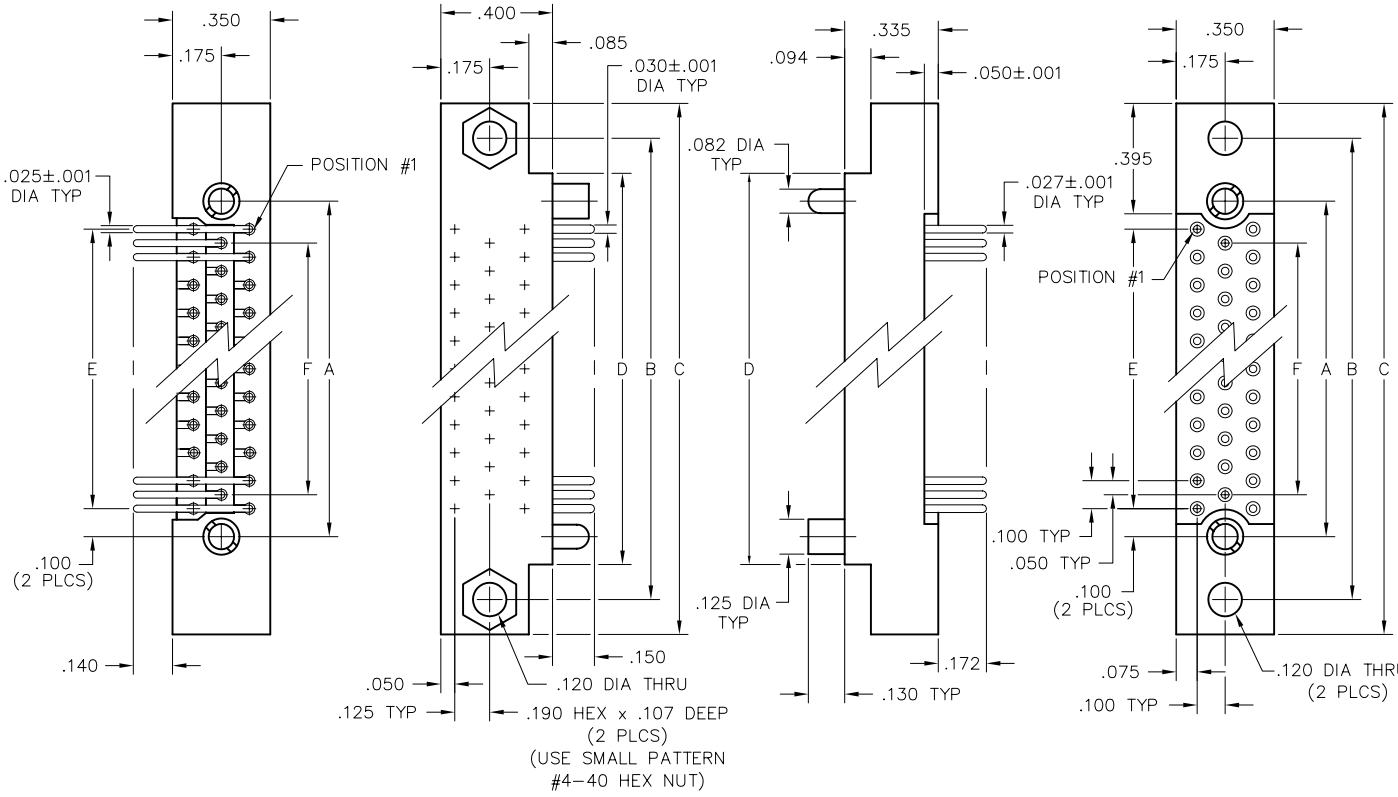

PLUG

RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300

PLUG: WG 50 PR9 SY
RECEPTACLE: WG 50 SAD11 SY
XX XX XXXXX XX

PLUG		RECEPTACLE	
SERIES			
WG	Plug, right angle, with mounting ears	WG	Receptacle, straight, with mounting ears
		WG	Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (50, 62, 80, 92, or 104)	XX	Number of contacts (50, 62, 80, 92, or 104)

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image.

TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PR15	Pin, right angle, dip solder, .234" x .025" dia
PRW34	Pin, right angle, wire wrap®, .531"
PRW42	Pin, right angle, wire wrap®, .656"

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination .150", connector saver
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WG50PR9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"


SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
J	Fixed jackset
JL	Fixed jackset, long

OPTIONS

- Option Codes: Add to the end of the part number. Example: WG80PR9SY342. Call factory for additional codes.

-342	Remove mounting ears. (.250" each end)
-548	Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82	Termination face sealed against conformal coating
-D01	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant

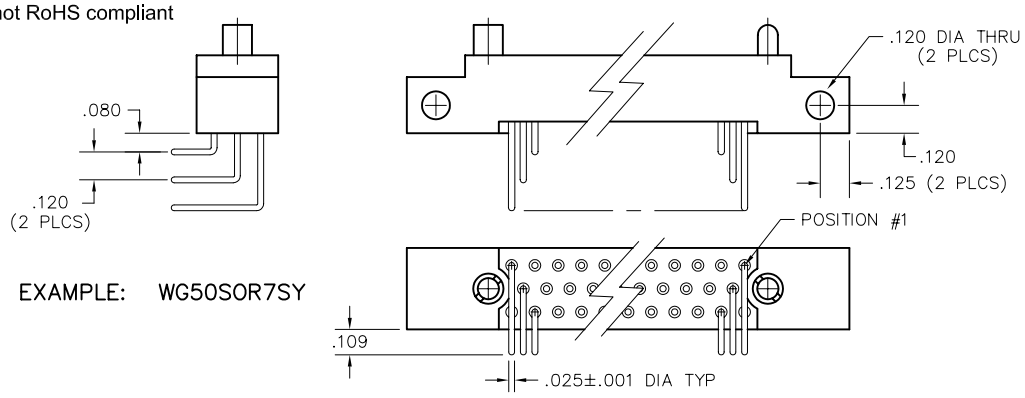


EXAMPLE: WG50SOR7SY


3 · ROW
Sandwich Boards

.100"

WGV - WG

50 thru 104 Contacts

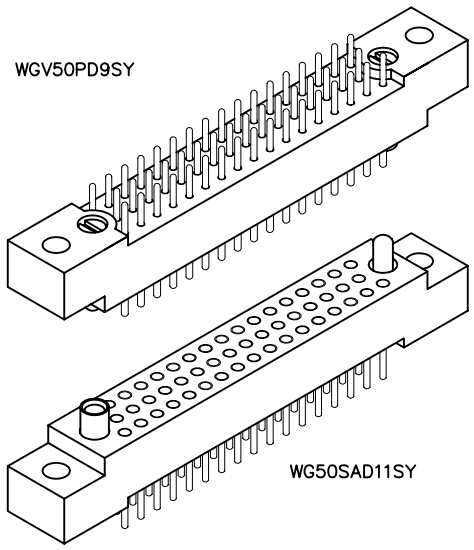

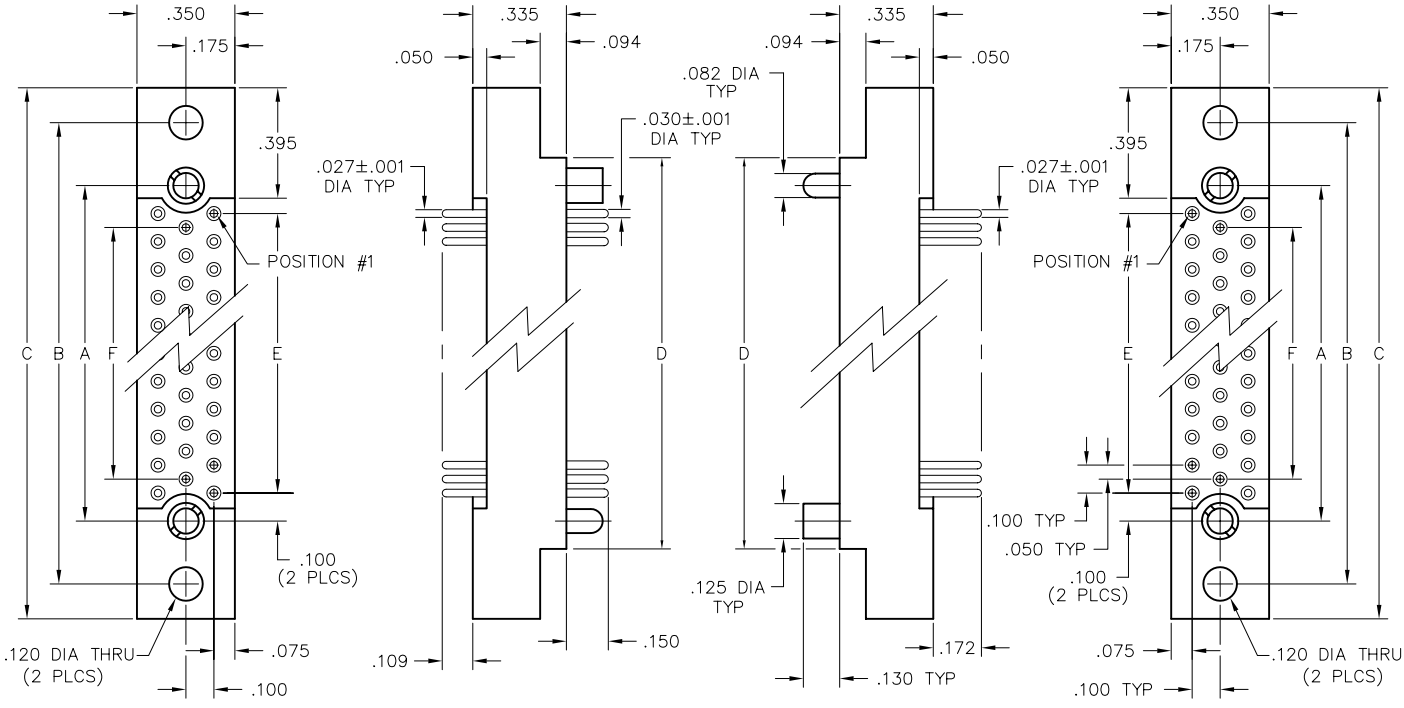

PLUG

RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300

AirBorn

PLUG: WGV 50 PD9 SY
RECEPTACLE: WG 50 SAD11 SY
XXX XX XXXXX XX

PLUG		RECEPTACLE	
SERIES			
WGV	Plug, with mounting ears	WG	Receptacle, straight, with mounting ears
		WG	Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (50, 62, 80, 92, or 104)	XX	Number of contacts (50, 62, 80, 92, or 104)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

TYPE CONTACTS/TERMINATIONS:	
PC	Pin, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia
PF3	Pin, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"
PF8	Pin, straight, flex circuit, .125"
PW34	Pin, straight, wire wrap®, .531"
PW40	Pin, straight, wire wrap®, .625"

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination .150", connector saver
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WGV50PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
J	Fixed jackset
JL	Fixed jackset, long
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Turning jackset, .500"
JTL	Turning jackset, long, .700"

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
J	Fixed jackset
JL	Fixed jackset, long
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Turning jackset, .500"
JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WG80PR9SY342. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)


☒ = Option not RoHS compliant


AirBorn

3 · ROW
PC Card to Board or PC Card
.100"

WG - WG

160 & 208 Contacts

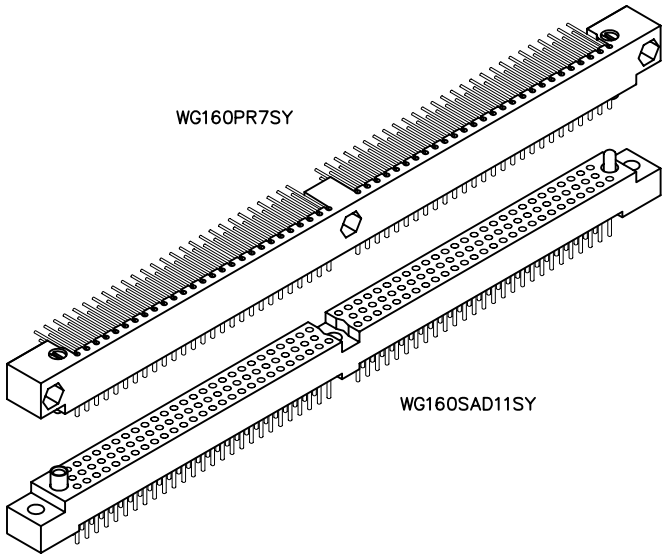

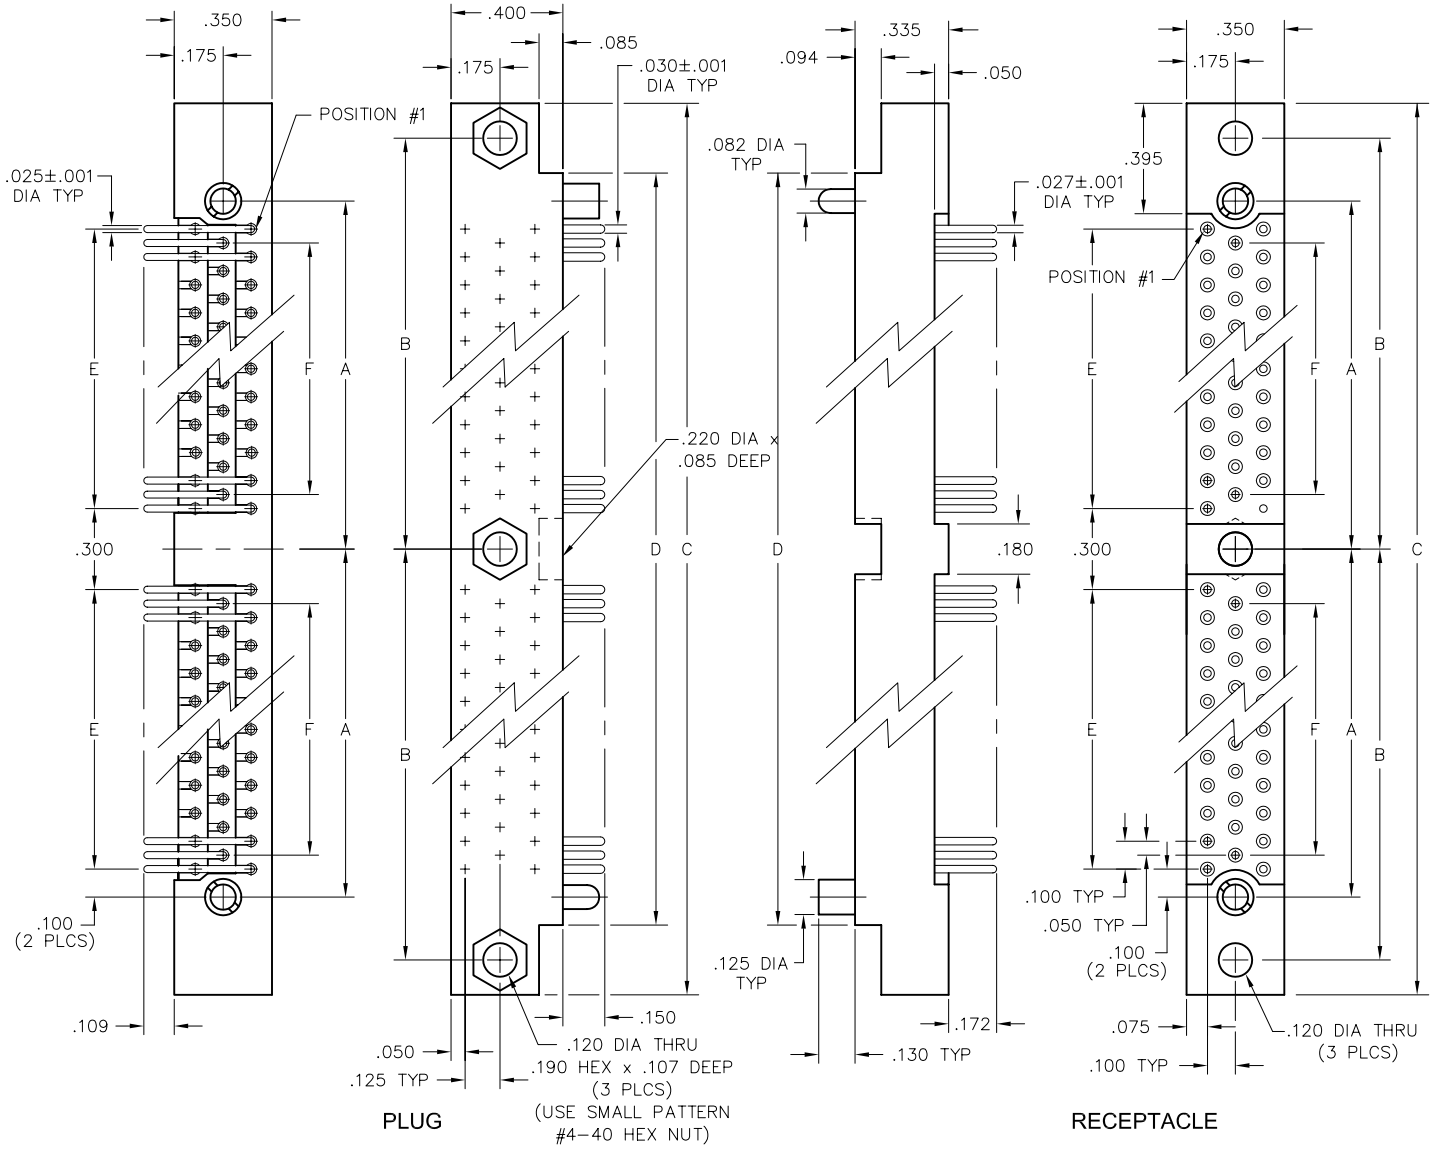

DIMENSIONS						
SIZE	A	B	C	D	E	F
160	2.850	3.075	6.400	5.900	2.600	2.500
208	3.650	3.875	8.000	7.500	3.400	3.300

PLUG: WG 160 PR7 SY
RECEPTACLE: WG 160 SAD11 SY
XX XXX XXXXX XX

PLUG		RECEPTACLE	
SERIES			
WG	Plug, right angle, with mounting ears	WG	Receptacle, straight, with mounting ears
		WG	Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (160 or 208)	XX	Number of contacts (160 or 208)

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image.

TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
		SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAF3	Socket, straight, flex circuit, .050"
		SAF6	Socket, straight, flex circuit, .093"
		SAF9	Socket, straight, flex circuit, .140"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination .150", connector saver
		SAW24	Socket, straight, wire wrap®, .375"
		SAW40	Socket, straight, wire wrap®, .625"
		SOR7	Socket, right angle, dip solder, .109" x .025" dia
		SOR9	Socket, right angle, dip solder, .140" x .025" dia
		SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WG160PR9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.


SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
JT	Turning jackset, .435"	J	Fixed jackset
JTA	Turning jackset, .135"	JL	Fixed jackset, long
JTB	Hex turning jackset, .135"		
JTC	Hex turning jackset, .435"		
JTL	Turning jackset, long, .635"		

OPTIONS


- Option Codes: Add to the end of the part number. Example: WG160PR9SY548. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant




EXAMPLE: WG160SOR7SY

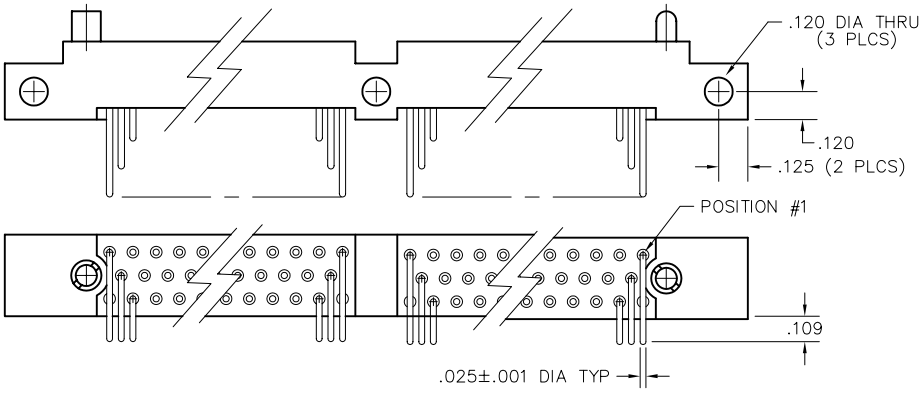


3 · ROW
PC Card to Chassis
.100"

WG - WGKA

50 thru 160

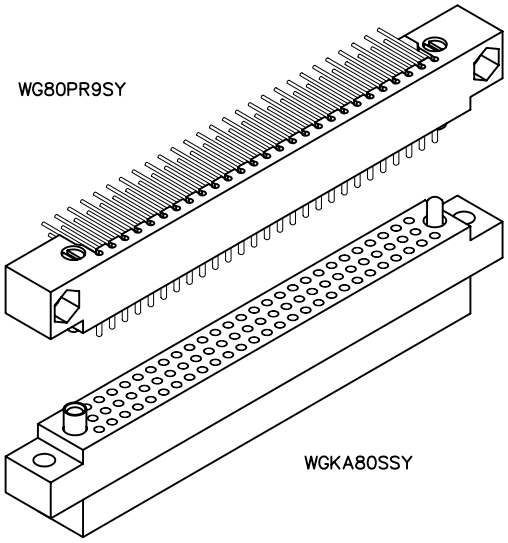

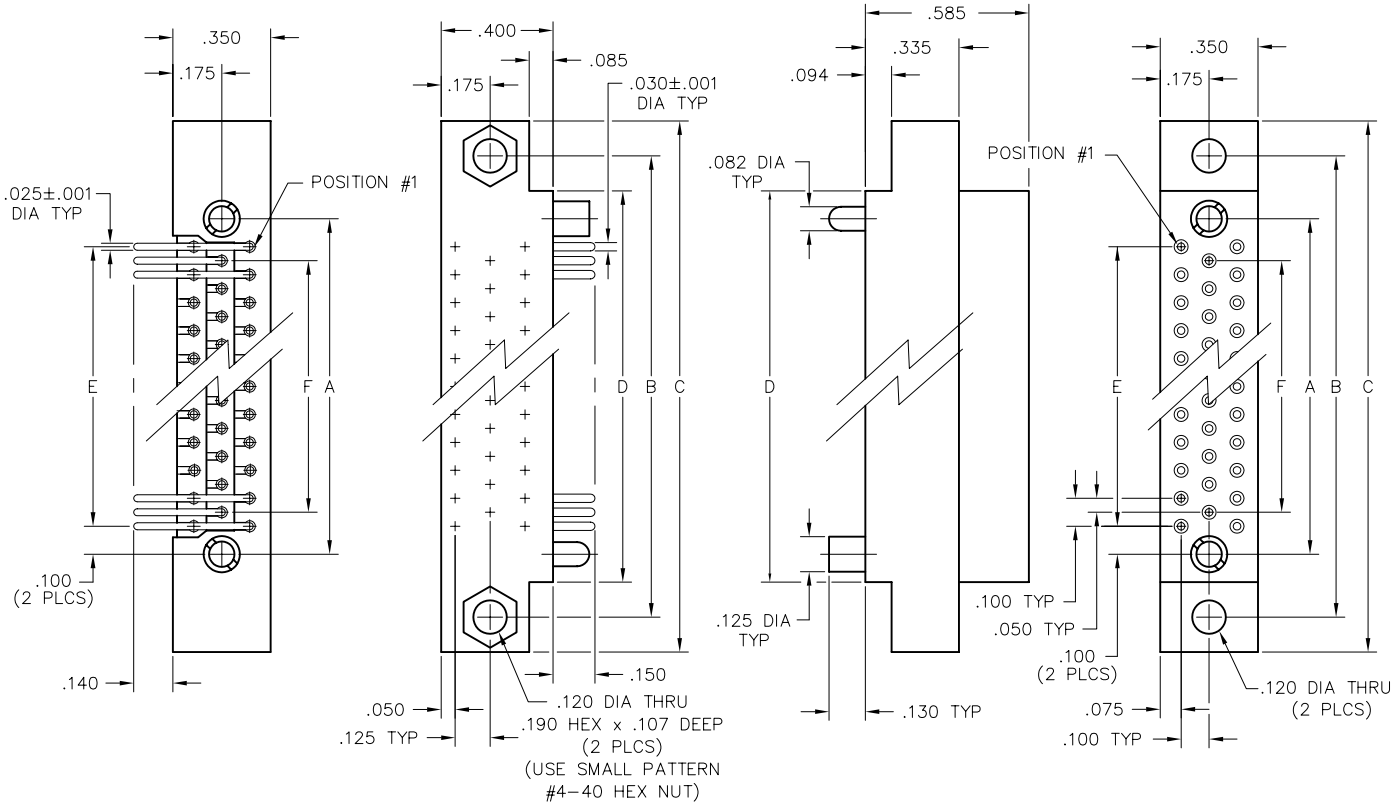

PLUG RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300
160*	2.850	3.075	6.400	5.900	2.600	2.500

* = SEE OPPOSITE PAGE FOR 160 POSITION CONFIGURATION

Call (972) 931-3200 · Fax (972) 931-9305 www.AirBorn.com

PLUG:	WG	80	PR9	SY
RECEPTACLE:	WGKA	80	S	SY
	XXXX	XX	XXX	XX

PLUG		RECEPTACLE	

SERIES

WG	Plug, right angle, with mounting ears	WGKA	Receptacle, straight, crimp removable, with mounting ears

- WGKA and WGDXA also mate with WGV connectors. "A" means contacts are included.

SIZE

XX	Number of contacts (50, 62, 80, 92, 104 or 160)	XX	Number of contacts (50, 62, 80, 92, 104 or 160)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	S	Socket, straight, crimp removable, 22 AWG
PR9	Pin, right angle, dip solder, .140" x .025" dia	SA	Same as above
PR11	Pin, right angle, dip solder, .172" x .025" dia	P	Pin, straight, crimp removable, 22 AWG
PRW40	Pin, right angle, wire wrap®, .625"		

HARDWARE


- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTA10PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized

OPTIONS


- Option Codes: Add to the end of the part number. Example: WGKA80SSY-C45. Call factory for additional codes.


-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

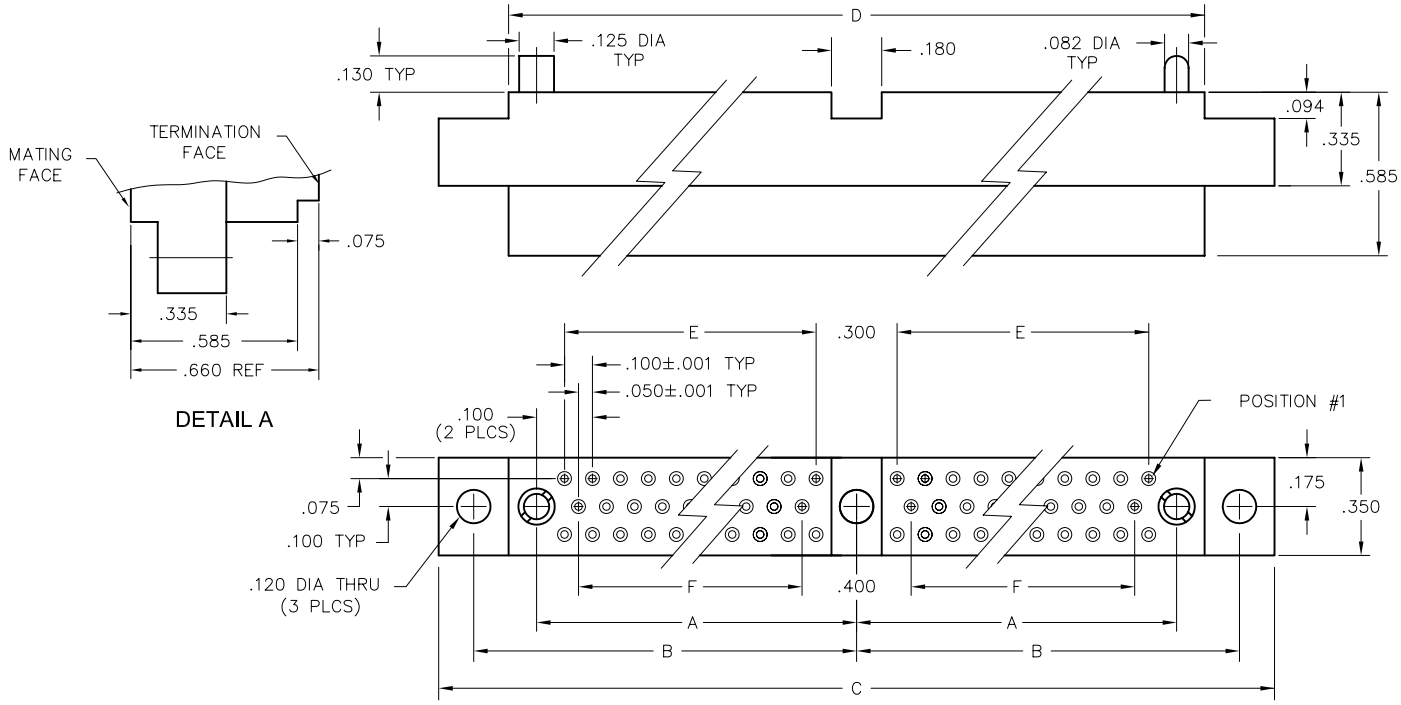

EXAMPLE: WGKA160SSY

3 · ROW
Chassis to Chassis
.100"
WGKVA - WGKA
50 thru 160

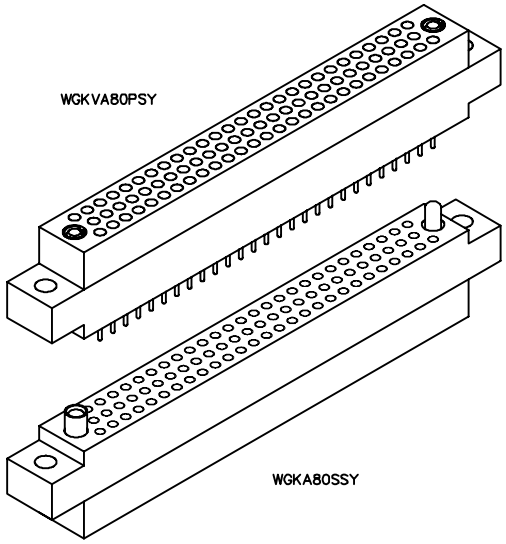

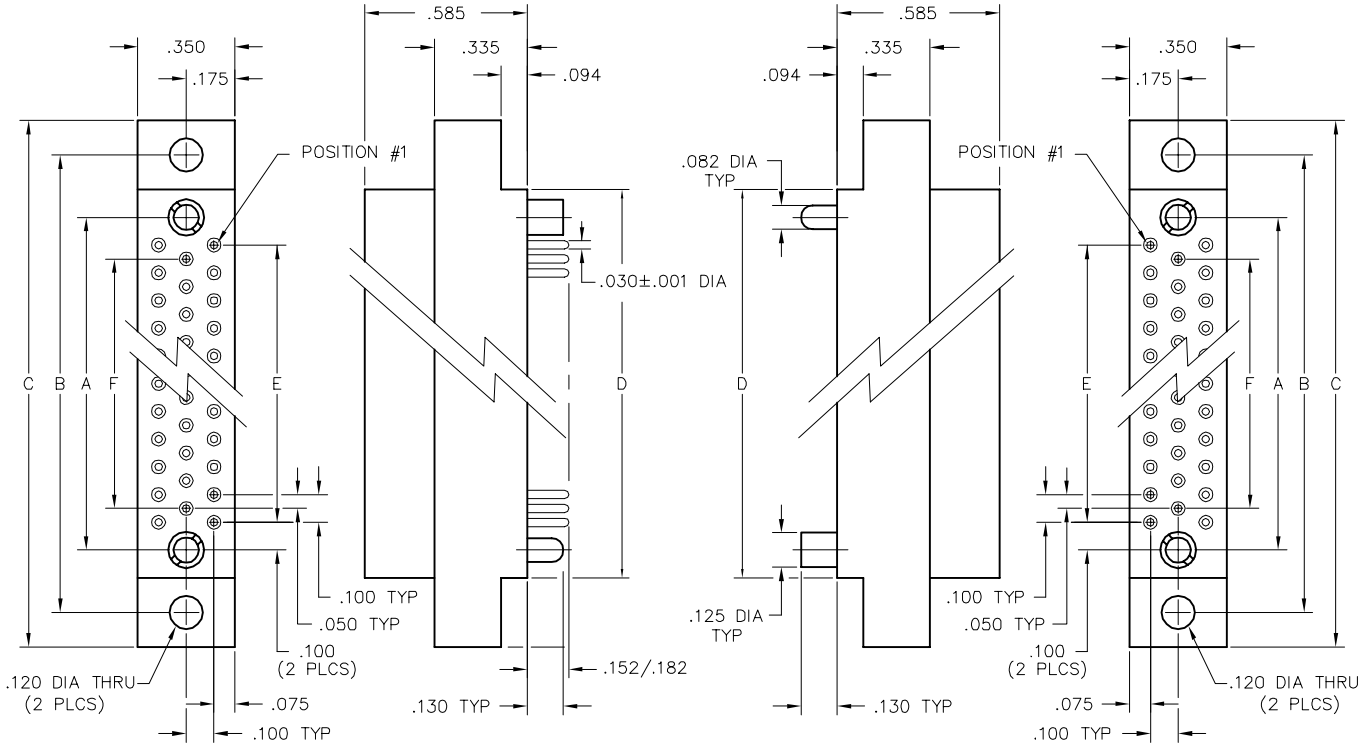

PLUG RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300
160*	2.850	3.075	6.400	5.900	2.600	2.500

* = SEE OPPOSITE PAGE FOR 160 POSITION CONFIGURATION

Call (972) 931-3200 · Fax (972) 931-9305 www.AirBorn.com


PLUG: WGKVA 80 P SY
RECEPTACLE: WGKA 80 S SY
XXXXX XX XXX XX

PLUG		RECEPTACLE	
SERIES			
WGKVA	Plug, straight, crimp removable, with mounting ears	WGKA	Receptacle, straight, crimp removable, with mounting ears
• WGKVA and WGKA also mate with WG or WGV connectors. "A" means contacts are included.			
SIZE			
XX	Number of contacts (50, 62, 80, 92, 104 or 160)	XX	Number of contacts (50, 62, 80, 92, 104 or 160)
CONTACTS			
• The use of gaskets is not recommended with crimp socket contacts.			
• When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, crimp removable, 22 AWG	S	Socket, straight, crimp removable, 22 AWG
S	Socket, straight , crimp removable, 22 AWG	SA	Same as above
SA	Same as above	P	Pin, straight, crimp removable, 22 AWG
HARDWARE			
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .500"	JT	Turning jackset, .500"
JTA	Turning jackset, .200"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"	JTL	Turning jackset, long, .700"

OPTIONS

• Option Codes: Add to the end of the part number. Example: WGDXA80SSY-C45. Call factory for additional codes.

-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

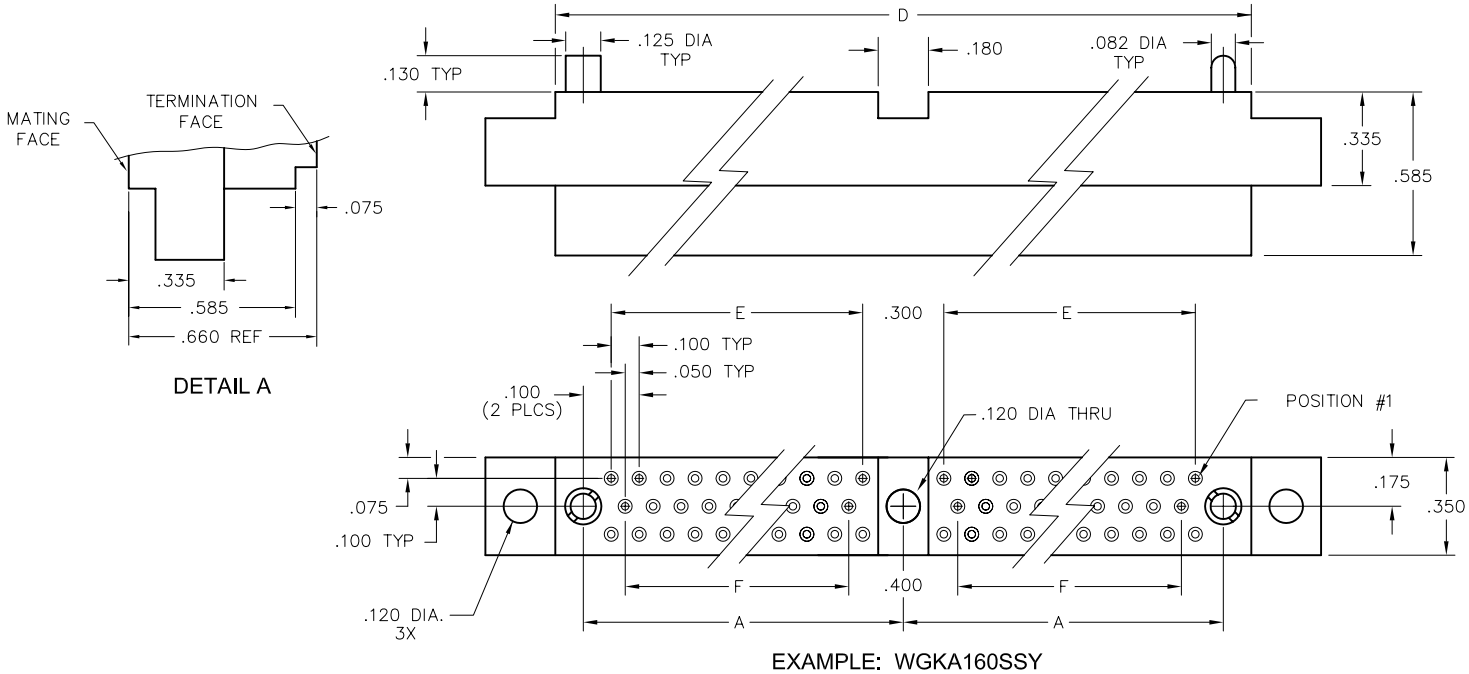



EXAMPLE: WGKA160SSY

3 • ROW
PC Card to Chassis
.100"

WG - WGDXA

50 thru 160

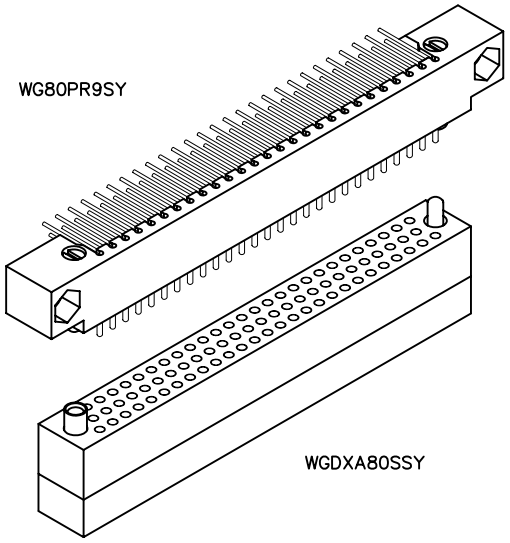

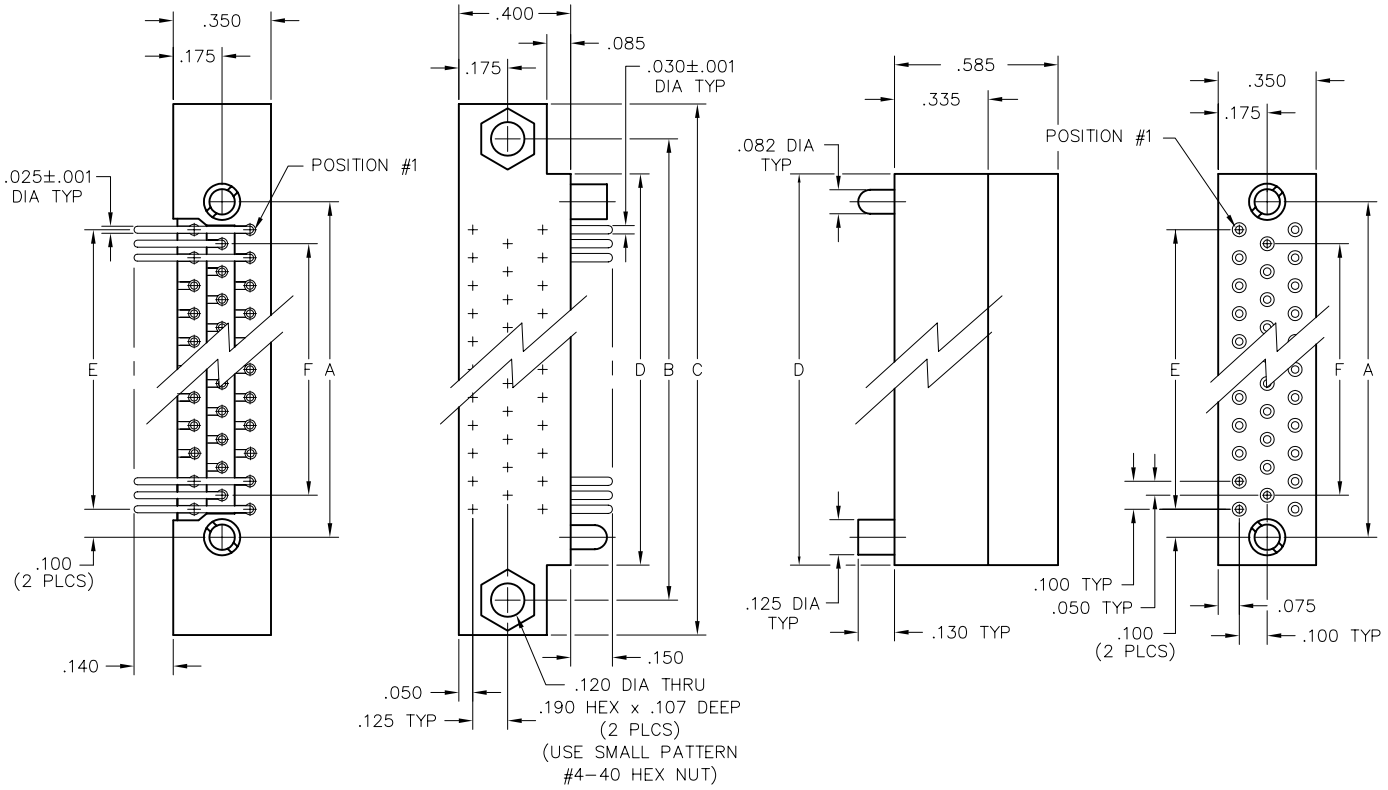

PLUG RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300
160*	2.850	3.075	6.400	5.900	2.600	2.500

* = SEE OPPOSITE PAGE FOR 160 POSITION CONFIGURATION

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

PLUG:	WG	80	PR9	SY
RECEPTACLE:	WGDXA	80	S	SY
	XXXXX	XX	XXX	XX

PLUG	RECEPTACLE

SERIES

WG	Plug, right angle, with mounting ears	WGDXA	Receptacle, straight, crimp removable, without mounting ears

- WGKA and WGDXA also mate with WGV connectors. "A" means contacts are included.

SIZE

XX	Number of contacts (50, 62, 80, 92, 104 or 160)	XX	Number of contacts (50, 62, 80, 92, 104 or 160)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- The contact type determines the image of the connector. Pin, right angle contacts are always plug image. Straight pin or sockets are receptacle image.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	S	Socket, straight, crimp removable, 22 AWG
PR9	Pin, right angle, dip solder, .140" x .025" dia	SA	Same as above
PR11	Pin, right angle, dip solder, .172" x .025" dia	P	Pin, straight, crimp removable, 22 AWG
PRW40	Pin, right angle, wire wrap®, .625"		


HARDWARE

SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
		JT	Turning jackset, .500"
		JTA	Turning jackset, .200"
		JTB	Hex turning jackset, .200"
		JTC	Hex turning jackset, .500"
		JTL	Turning jackset, long, .700"


OPTIONS

- Option Codes: Add to the end of the part number. Example: WGDXA80SSY-C45. Call factory for additional codes.

-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

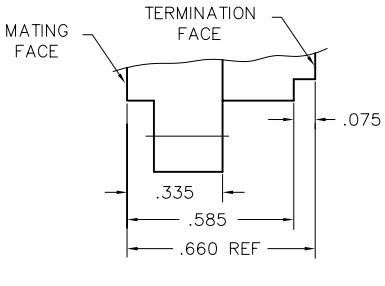



DETAIL A

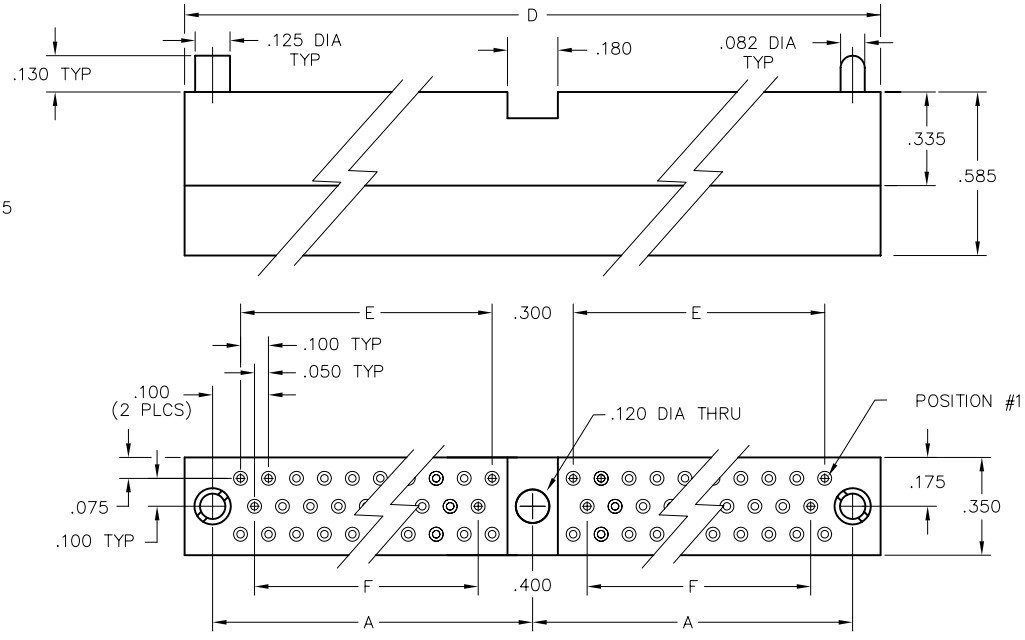

EXAMPLE: WGDXA160SSY

3 · ROW
Chassis to Chassis
.100"
WGDVA - WGDXA
50 thru 160

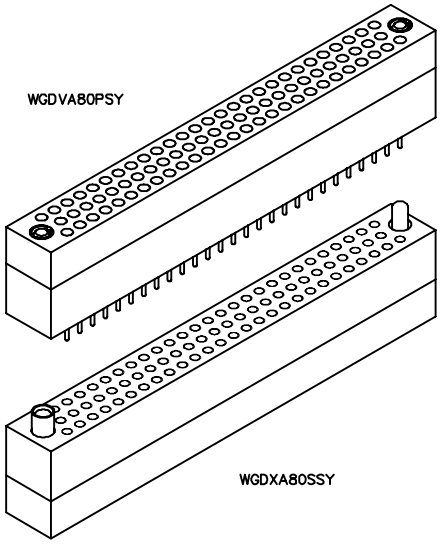

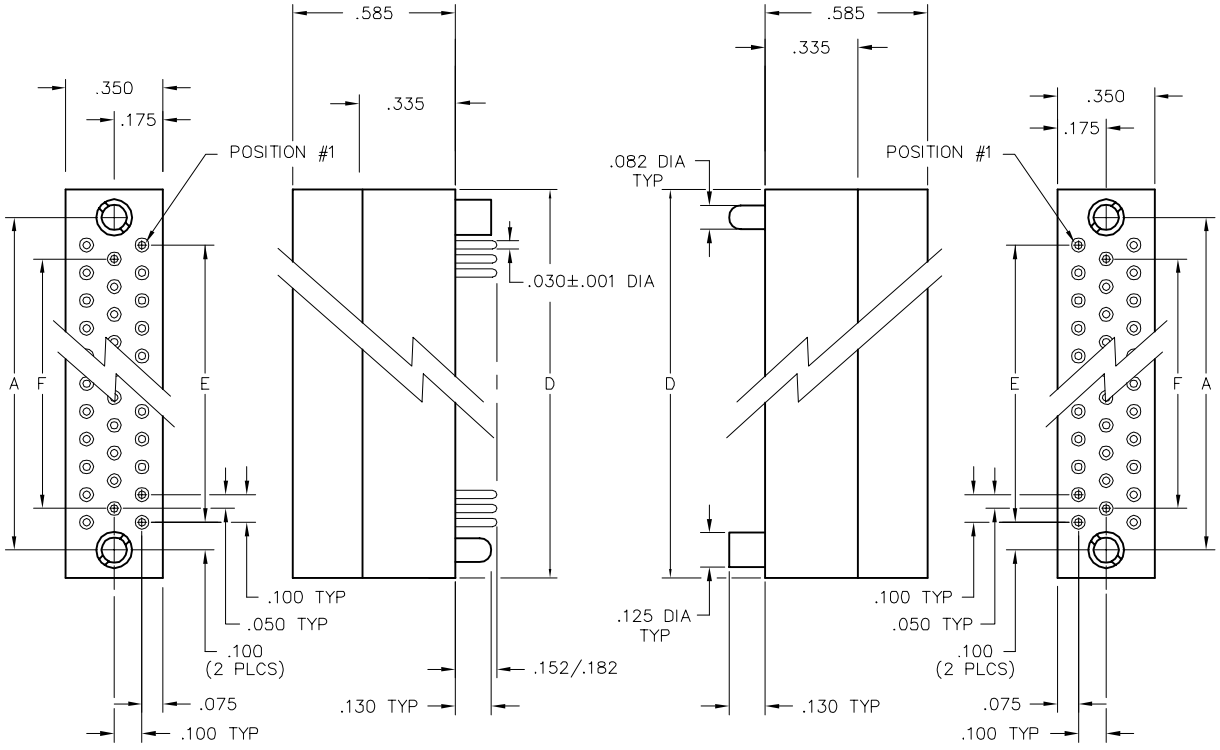

PLUG RECEPTACLE

DIMENSIONS				
SIZE	A	D	E	F
50	1.800	2.000	1.600	1.500
62	2.200	2.400	2.000	1.900
80	2.800	3.000	2.600	2.500
92	3.200	3.400	3.000	2.900
104	3.600	3.800	3.400	3.300
160*	2.850	5.900	2.600	2.500

* = SEE OPPOSITE PAGE FOR 160 POSITION CONFIGURATION

PLUG: WGDVA 80 P SY
RECEPTACLE: WGDXA 80 S SY
XXXXX XX XXX XX

PLUG	RECEPTACLE

SERIES

PLUG	RECEPTACLE
WGDVA Plug, straight, crimp removable, without mounting ears	WGDXA Receptacle, straight, crimp removable, without mounting ears

- WGDVA and WGDXA also mate with WG or WGV connectors. "A" means contacts are included.

SIZE

PLUG	RECEPTACLE
XX Number of contacts (50, 62, 80, 92, 104 or 160)	XX Number of contacts (50, 62, 80, 92, 104 or 160)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

PLUG TYPE CONTACTS/TERMINATIONS:	RECEPTACLE TYPE CONTACTS/TERMINATIONS:
P Pin, straight, crimp removable, 22 AWG	S Socket, straight, crimp removable, 22 AWG
S Socket, straight , crimp removable, 22 AWG	SA Same as above
SA Same as above	P Pin, straight, crimp removable, 22 AWG


HARDWARE

PLUG	RECEPTACLE
SY Guide set	SY Guide set
SY-# Guide set, polarized	SY-# Guide set, polarized
J Fixed jackset	J Fixed jackset
JT Turning jackset, .500"	JT Turning jackset, .500"
JTA Turning jackset, .200"	JTA Turning jackset, .200"
JTB Hex turning jackset, .200"	JTB Hex turning jackset, .200"
JTC Hex turning jackset, .500"	JTC Hex turning jackset, .500"
JTL Turning jackset, long, .700"	JTL Turning jackset, long, .700"


OPTIONS

- Option Codes: Add to the end of the part number. Example: WGDXA80SSY-C45. Call factory for additional codes.

-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

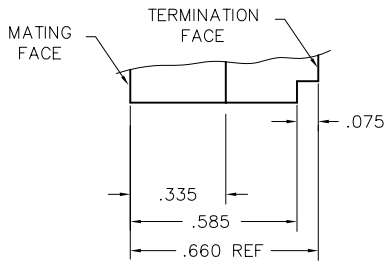

DETAIL A

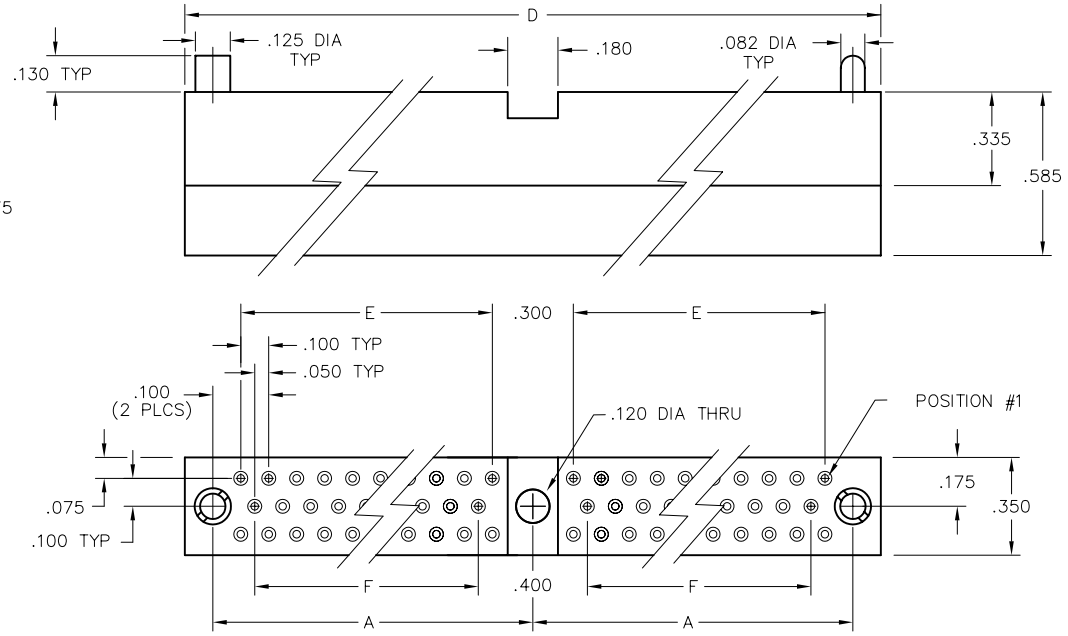



EXAMPLE: WGDXA160SSY

AirBorn

3 • ROW
PC Card to Board or Chassis
.100"

WGR - WGR
92 Contacts

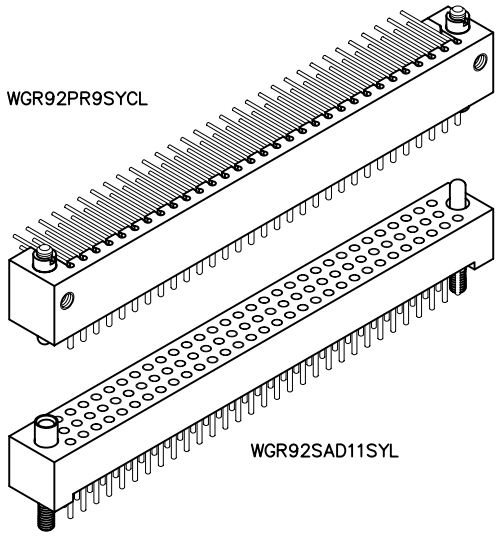

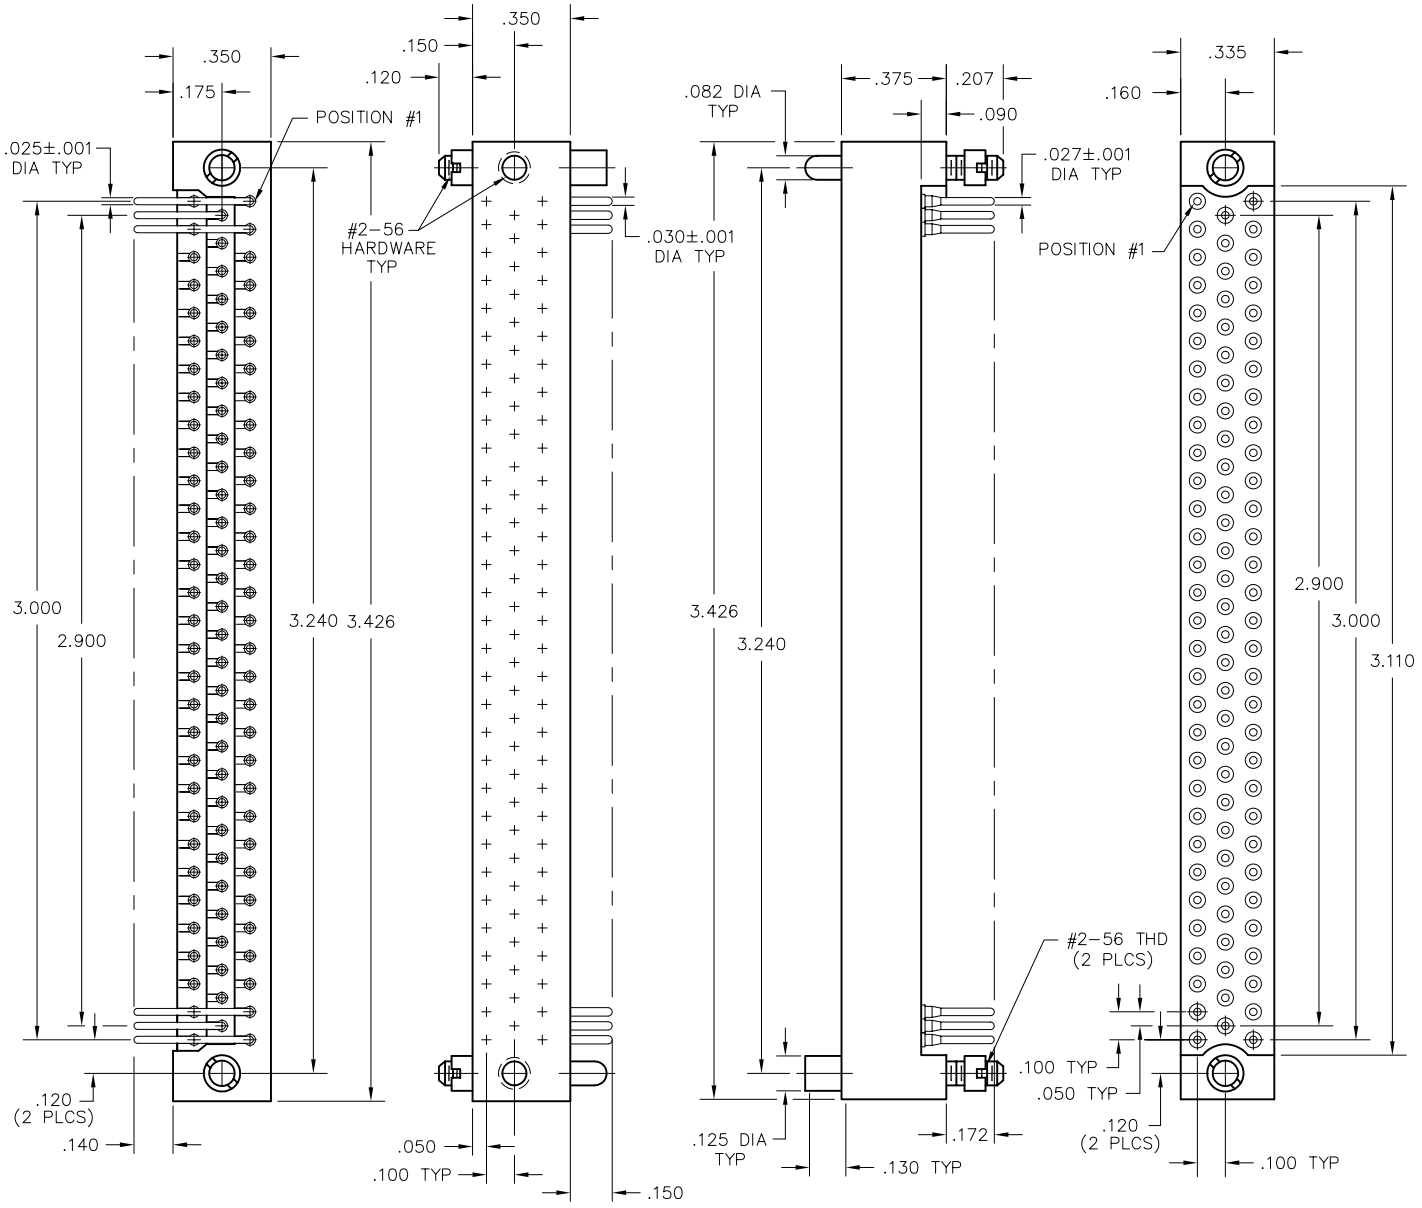

PLUG RECEPTACLE

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

PLUG: WGR 92 PR9 SYCL
RECEPTACLE: WGR 92 SAD11 SYL
XXX XX XXXXX XXXX

PLUG		RECEPTACLE	
SERIES			
WGR	Plug, right angle, without mounting ears	WGR	Receptacle, straight, without mounting ears
SIZE			
92	Number of contacts	92	Number of contacts
CONTACTS			

- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
		SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD16	Socket, straight, dip solder, .250" x .027" dia
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination .150", connector saver
		SAW40	Socket, straight, wire wrap®, .625"
		SAF6	Socket, straight, flex circuit, .093"


HARDWARE			
SYCL	Guide set, cross hole mount	SYL	Guide set, long
JCL	Fixed jackset, cross hole mount	JT	Turning jackset, .460"
		JTA	Turning jackset, .160"

OPTIONS


- Option Codes: Add to the end of the part number. Example: WGR92PR9JCL-D01. Call factory for additional codes.

-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).


☒ = Option not RoHS compliant

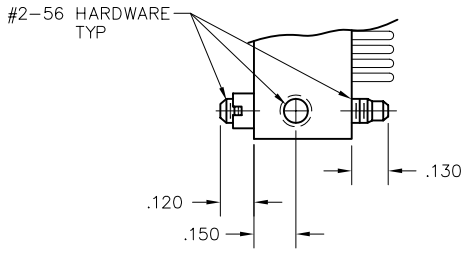

EXAMPLE: -JCL HARDWARE (PLUG)

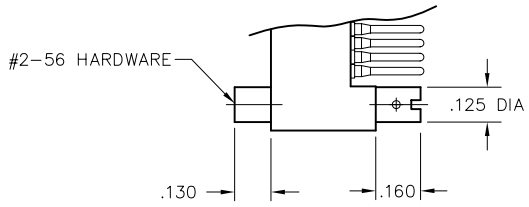

EXAMPLE: -JTA HARDWARE (RECEPTACLE)

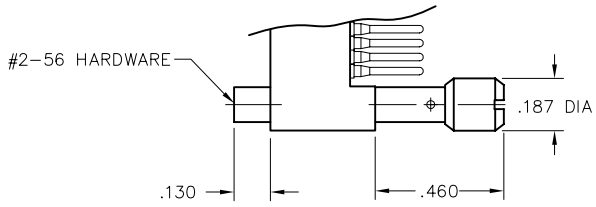


EXAMPLE: -JT HARDWARE (RECEPTACLE)


AirBorn

3 · ROW
PC Card to Board or Chassis
.100"

WGA - WGA

122 Contacts

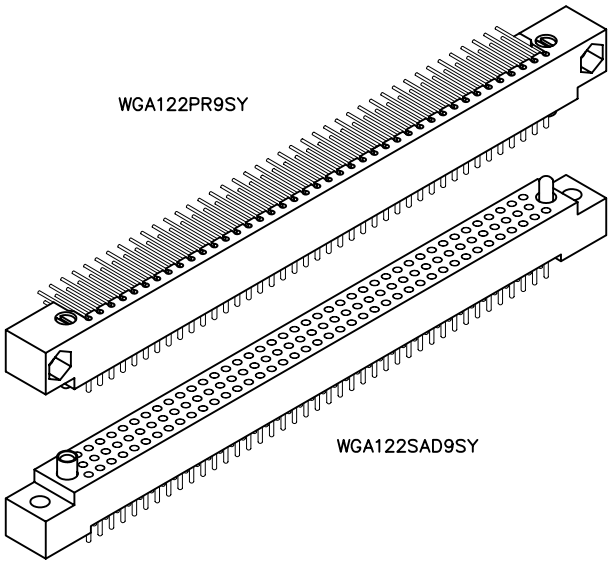

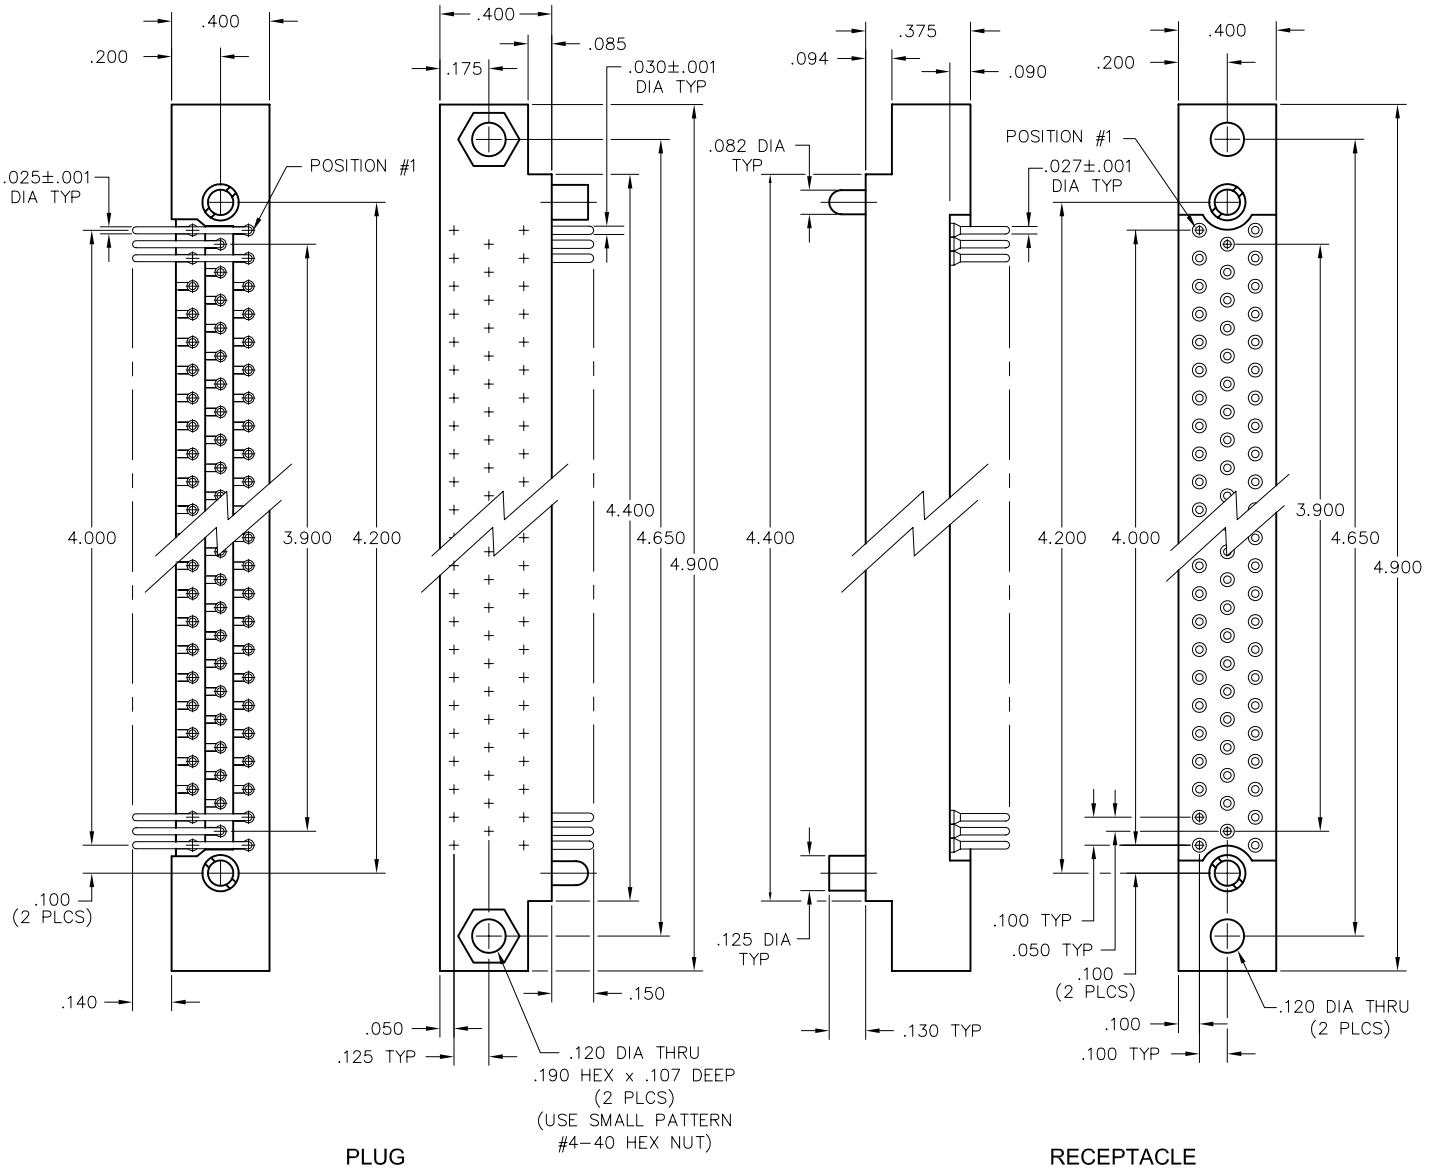

PLUG: WGA 122 PR9 SY
RECEPTACLE: WGA 122 SAD9 SY
XXX XXX XXXX XX

PLUG		RECEPTACLE	
SERIES			
WGA	Plug, right angle, with mounting ears	WGA	Receptacle, straight, with mounting ears
		WGA	Receptacle, right angle, with mounting ears
SIZE			
122	Number of contacts	122	Number of contacts

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image.

TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PRW32	Pin, right angle, wire wrap®, .500"

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination .150", connector saver
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia


HARDWARE			
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .435"	JL	Fixed jackset, long
JTA	Turning jackset, .135"	JT	Turning jackset, .460"
JTB	Hex turning jackset, .135"	JTA	Turning jackset, .160"
JTC	Turning jackset, .435"	JTB	Hex turning jackset, .160"
JTL	Turning jackset, long, .635"	JTC	Turning jackset, .460"
		JTL	Turning jackset, long, .660"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WGA122PR9SY548. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)
-413 Straight pin contacts in right angle plug molding with solder cup terminals extending .100" beyond molding.
-D54 Combine -B82 and -D01 special codes.

☒ = Option not RoHS compliant

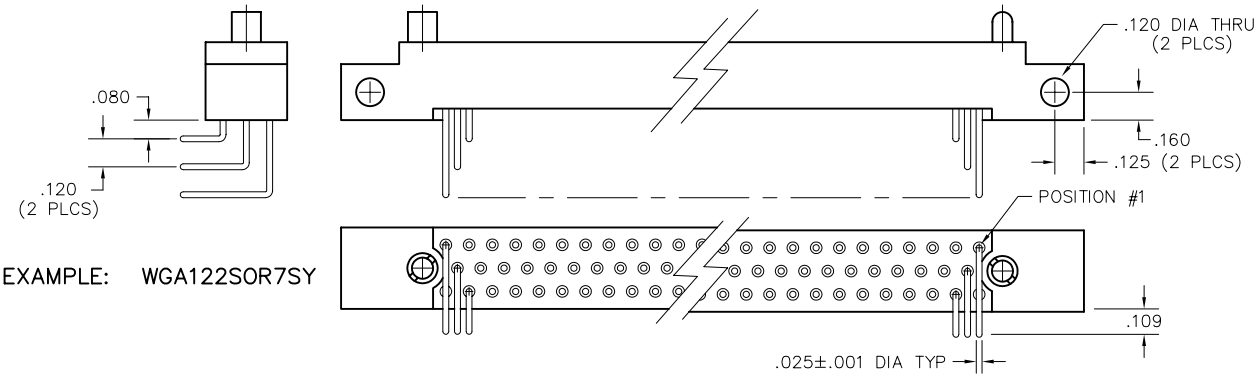

EXAMPLE: WGA122SOR7SY


Ask About AirBorn's Accelerated Delivery Service


AirBorn

3 · ROW
Sandwich Boards
.100"

WGAV - WGA

122 Contacts

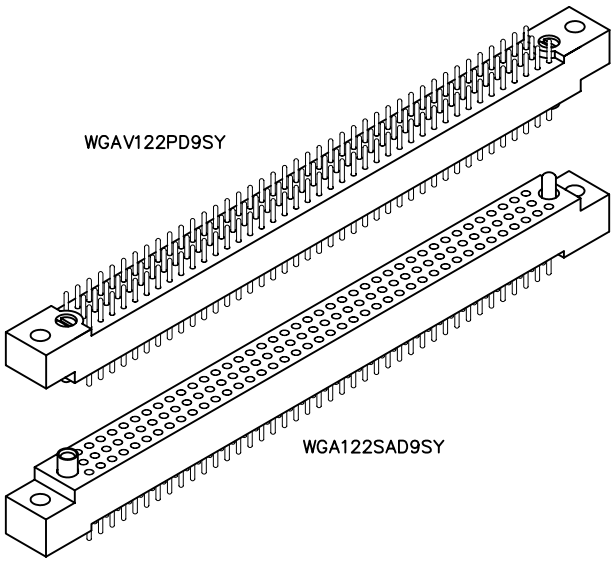

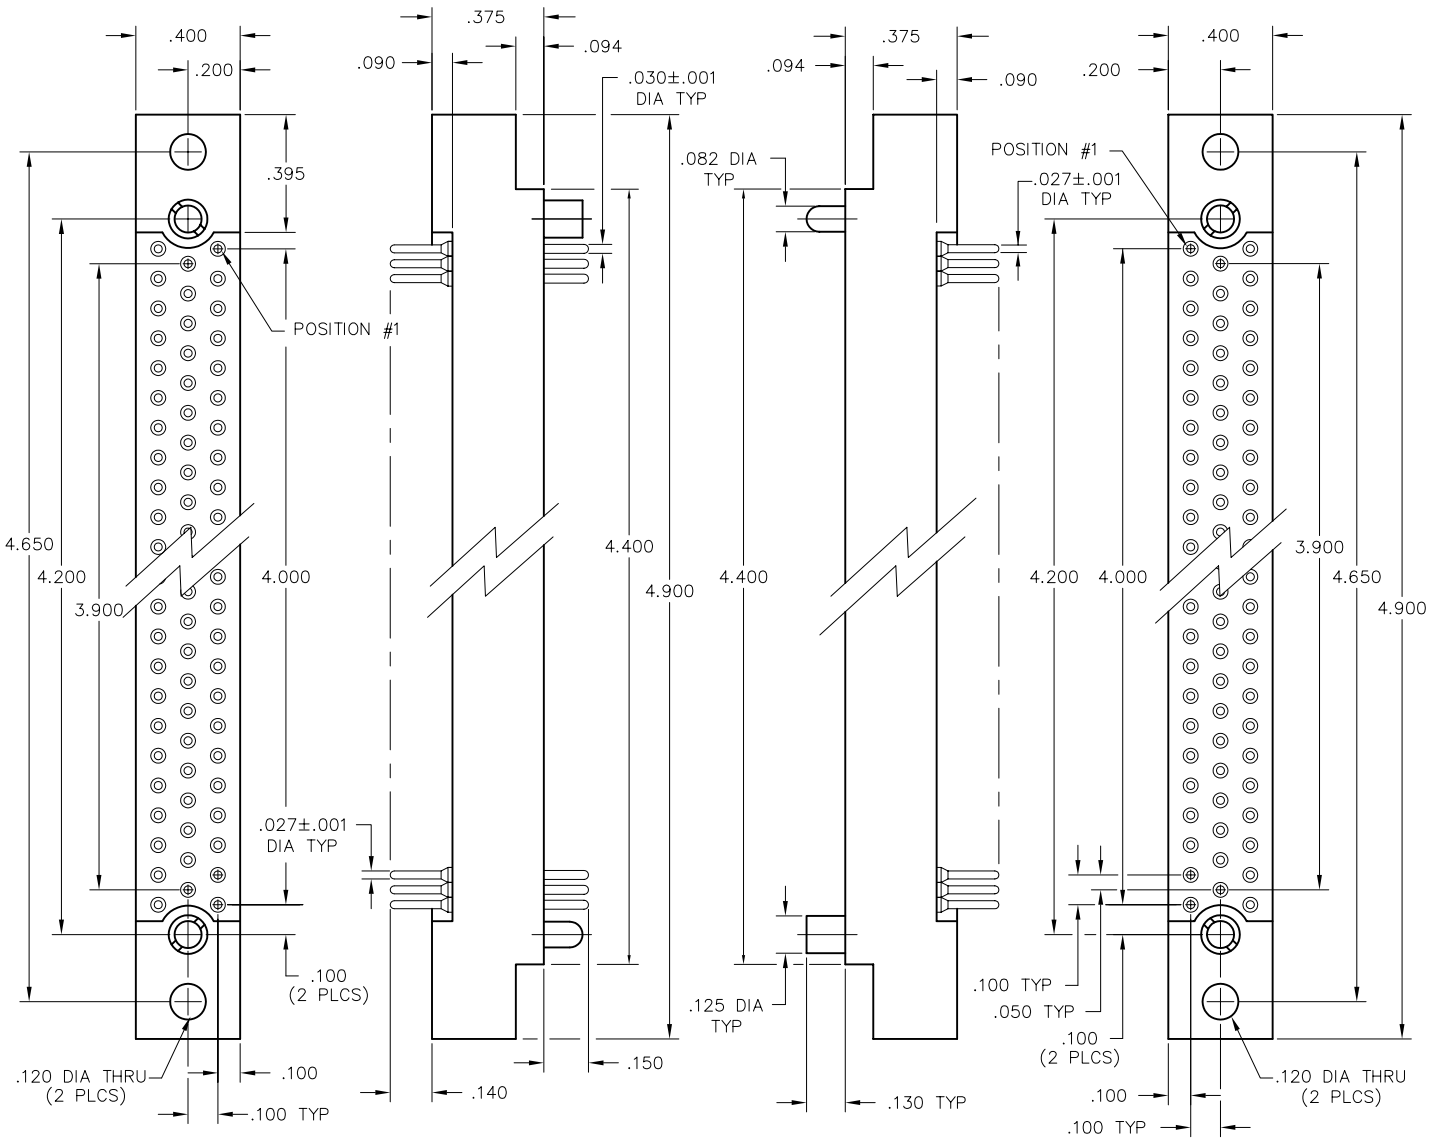

PLUG

RECEPTACLE

PLUG: WGAV 122 PD9 SY
RECEPTACLE: WGA 122 SAD9 SY
XXXX XXX XXXX XX

PLUG		RECEPTACLE	
SERIES			
WGAV	Plug, straight, with mounting ears	WGA	Receptacle, straight, with mounting ears
		WGA	Receptacle, right angle, with mounting ears
SIZE			
122	Number of contacts	122	Number of contacts

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

TYPE CONTACTS/TERMINATIONS:	
PC	Pin, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia
PD15	Pin, straight, dip solder, .234" x .027" dia
PF6	Pin, straight, flex circuit, .093"

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination .150", connector saver
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WGAV122PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
J	Fixed jackset
JL	Fixed jackset, long
JT	Turning jackset, .460"
JTA	Turning jackset, .160"
JTB	Hex turning jackset, .160"
JTC	Hex turning jackset, .460"
JTL	Turning jackset, long, .660"


SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
J	Fixed jackset
JL	Fixed jackset, long
JT	Turning jackset, .460"
JTA	Turning jackset, .160"
JTB	Hex turning jackset, .160"
JTC	Hex turning jackset, .460"
JTL	Turning jackset, long, .660"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WGAV122PD9SY-D01. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant

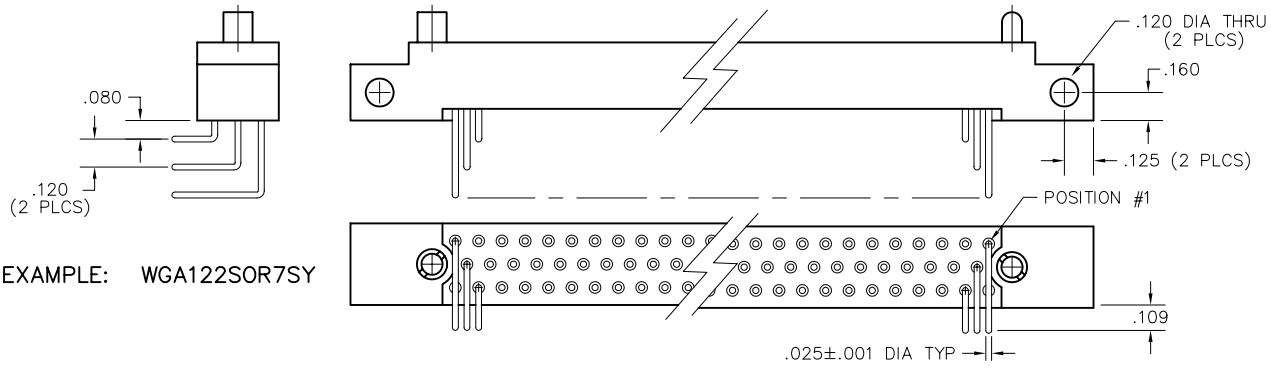

EXAMPLE: WGA122SOR7SY

Ask About AirBorn's Accelerated Delivery Service


AirBorn


4 · ROW
Cable to Board or Panel

.100"

WRF - WRF

100 Contacts

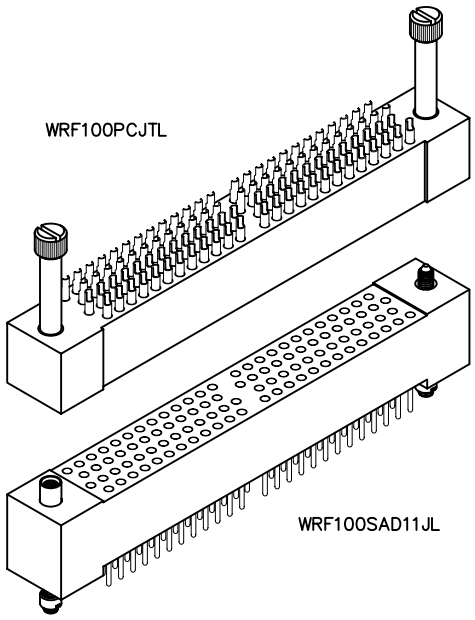

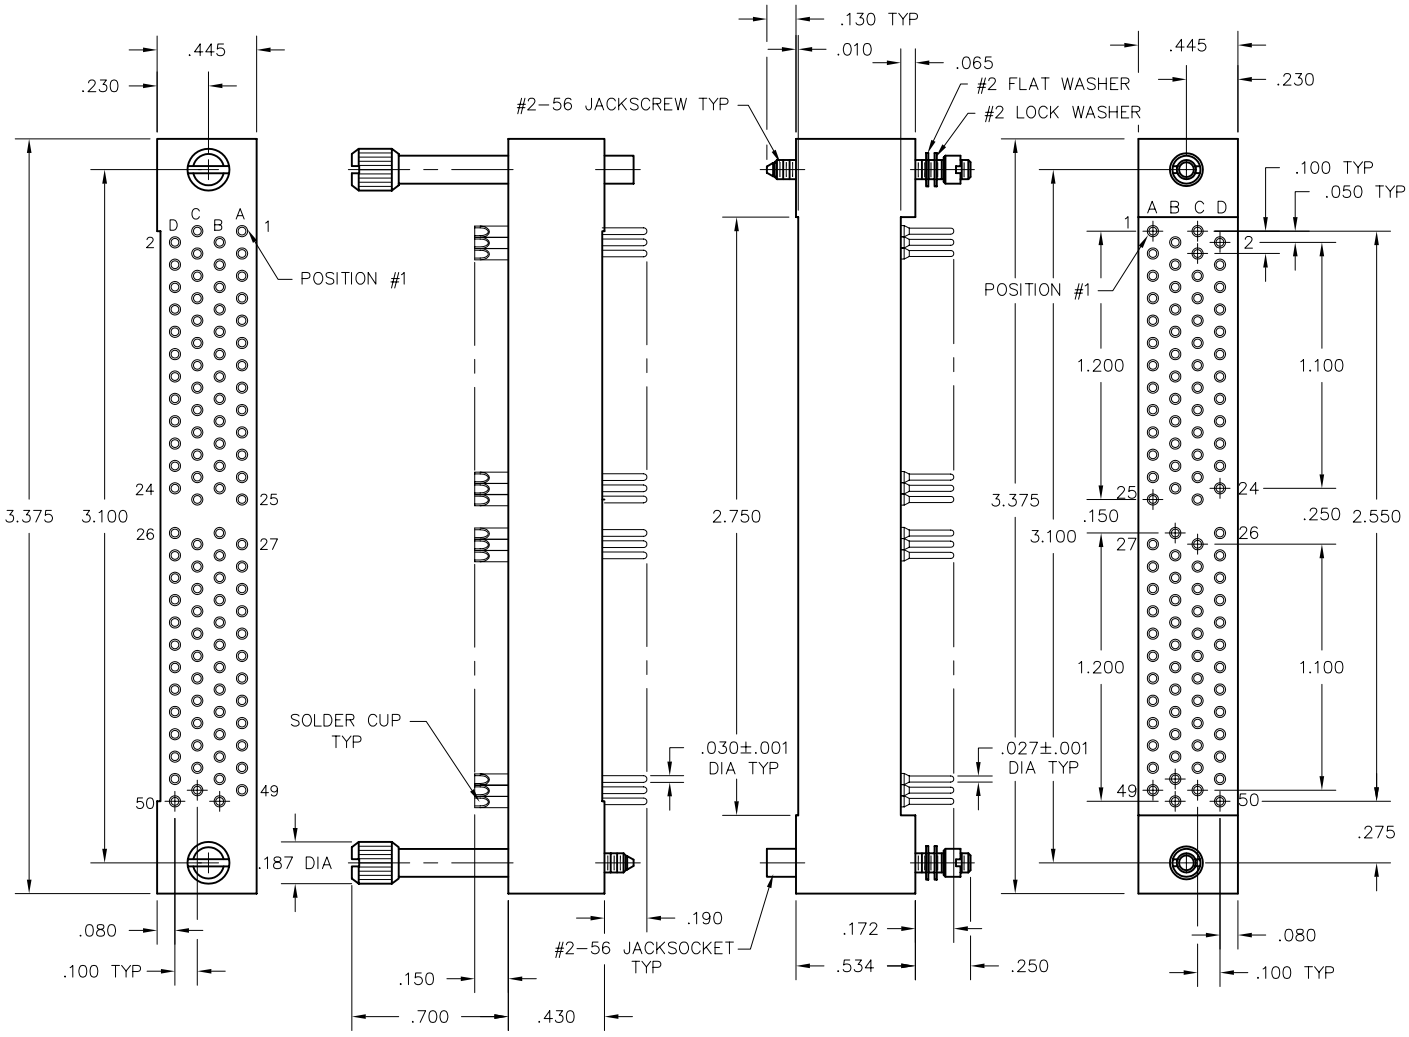

PLUG

RECEPTACLE

PLUG:	WRF	100	PC	JTL
RECEPTACLE:	WRF	100	SAD11	JL
	XXX	XXX	XXXXX	XXX

PLUG		RECEPTACLE	
SERIES			
WRF	Plug, straight, without mounting ears	WRF	Receptacle, straight, without mounting ears
SIZE			
100	Number of contacts	100	Number of contacts

CONTACTS

- Contact identification: Looking at the mating face of the connector, each contact has a double indicator designation, including a row letter and a position number. Rows "A" & "C" contain odd numbers 1 thru 49; rows "B" & "D" contain even numbers 2 thru 50.

TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
PC	Pin, straight, solder cup	SAC	Socket, straight, solder cup (.035" I.D.)
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PF6	Pin, straight, flex circuit, .093"	SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAP	Socket, straight, pin termination .150", connector saver

HARDWARE			
JTB	Hex turning jackset, .200"	J	Fixed jackset
JTL	Long turning jackset, .700"	JL	Fixed jackset, long

OPTIONS

- Option Codes: Add to the end of the part number. Example: WRF100SAD11JL-D54. Call factory for additional codes.

-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 special codes


☒ = Option not RoHS compliant


AirBorn

4 · ROW
PC Card to Board or Chassis
.100"

WRD - WRD

122 Contacts

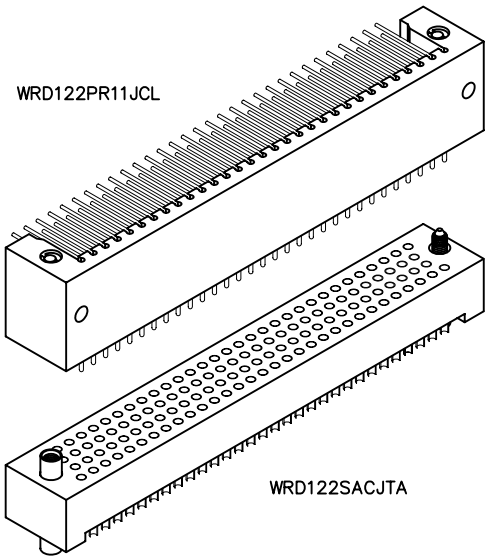

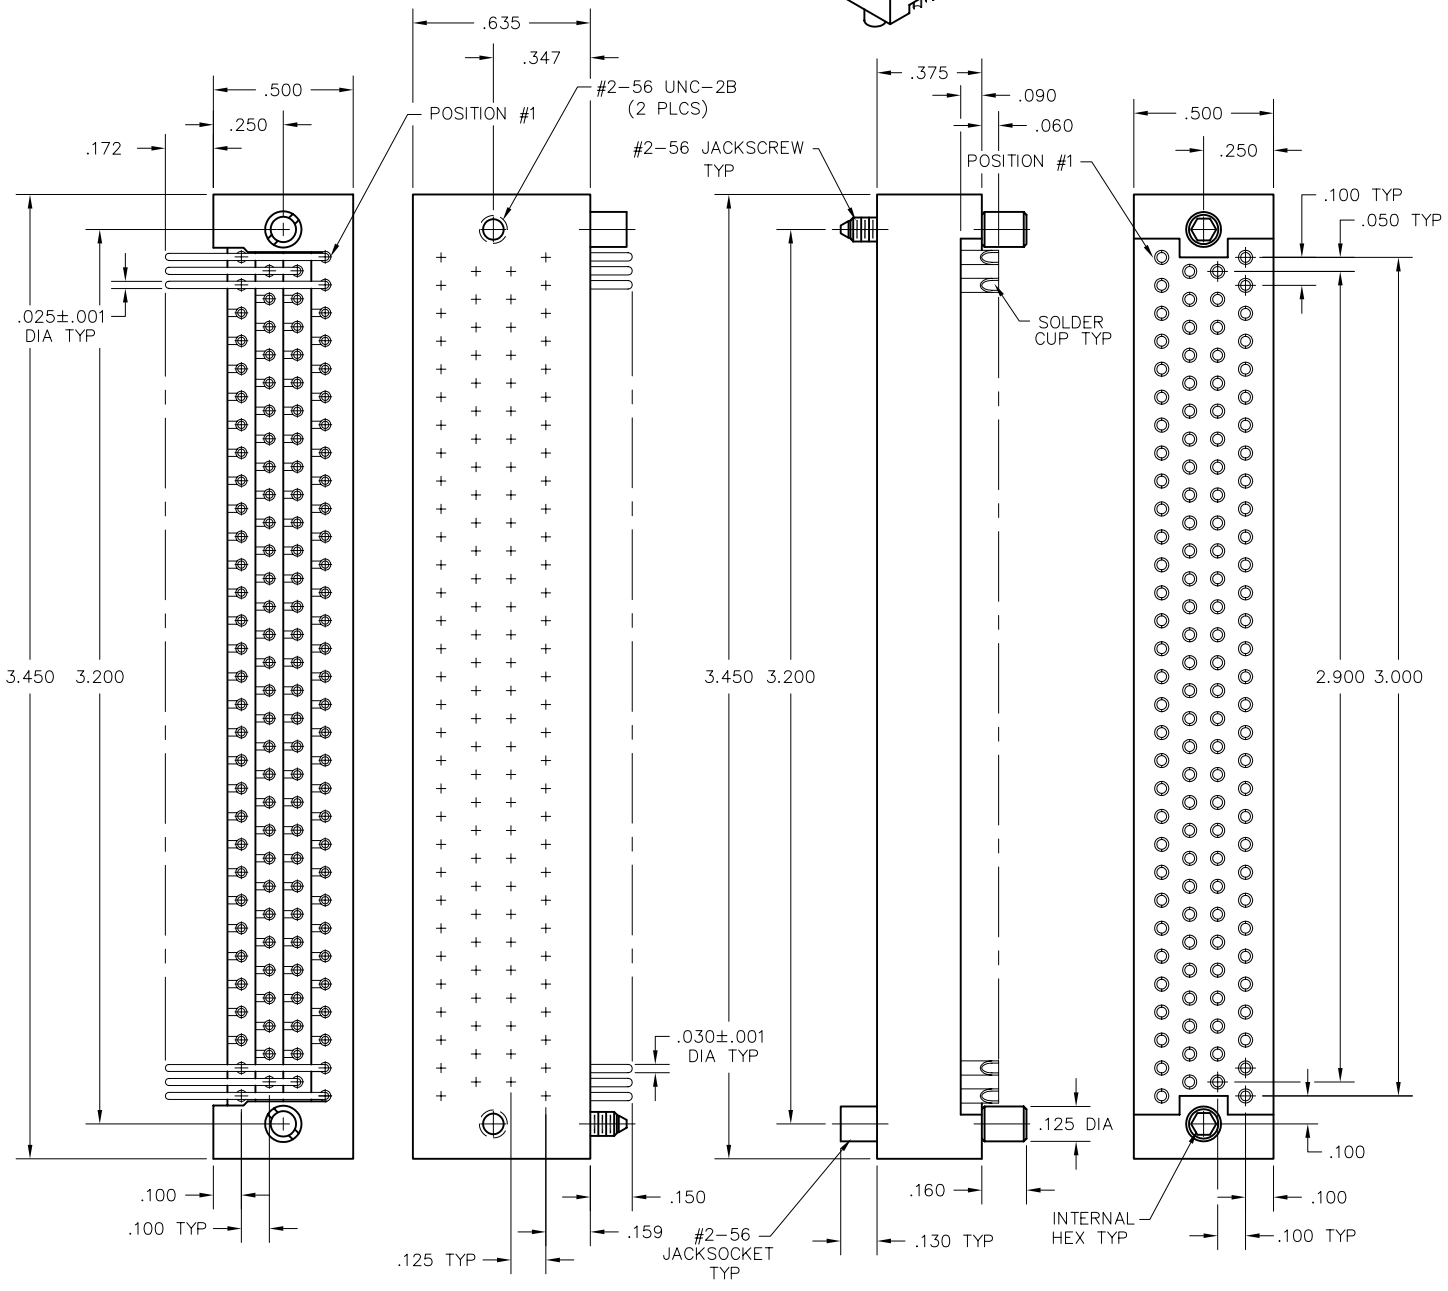

PLUG: WRD 122 PR11 JCL
RECEPTACLE: WRD 122 SAC JTA
XXX XXX XXXX XXX

PLUG		RECEPTACLE	
SERIES			
WRD	Plug, right angle, without mounting ears	WRD	Receptacle, straight, without mounting ears
		WRD	Receptacle, right angle, without mounting ears
SIZE			
122	Number of contacts	122	Number of contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR5	Pin, right angle, dip solder, .078" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAF3	Socket, straight, flex circuit, .050"
		SAF6	Socket, straight, flex circuit, .093"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination .150", connector saver
		SOR9	Socket, right angle, dip solder, .140"
HARDWARE			
SYCL	Guide set, cross hole mount	J	Fixed Jackset
SYCL-#	Guide set, cross hole mount, polarized	JTA	Turning jackset, .160"
JCL	Fixed jackset, cross hole mount	JTB	Hex turning jackset, .160"
JTB	Turning jackset, no cross hole	JTL	Long turning jackset, .640"
		SY	Guide set
		SY-#	Guide set, polarized

OPTIONS

- Option Codes: Add to the end of the part number. Example: WRD122SAD9SY-D54. Call factory for additional codes.


-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 special codes


☒ = Option not RoHS compliant

AirBorn

4 · ROW
Sandwich Boards
.100"

WRDV - WRD
122 Contacts

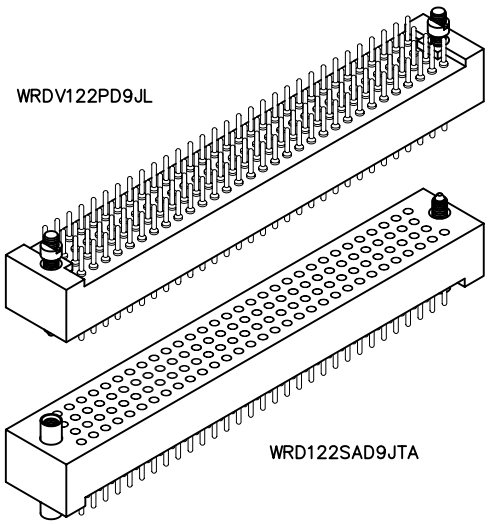

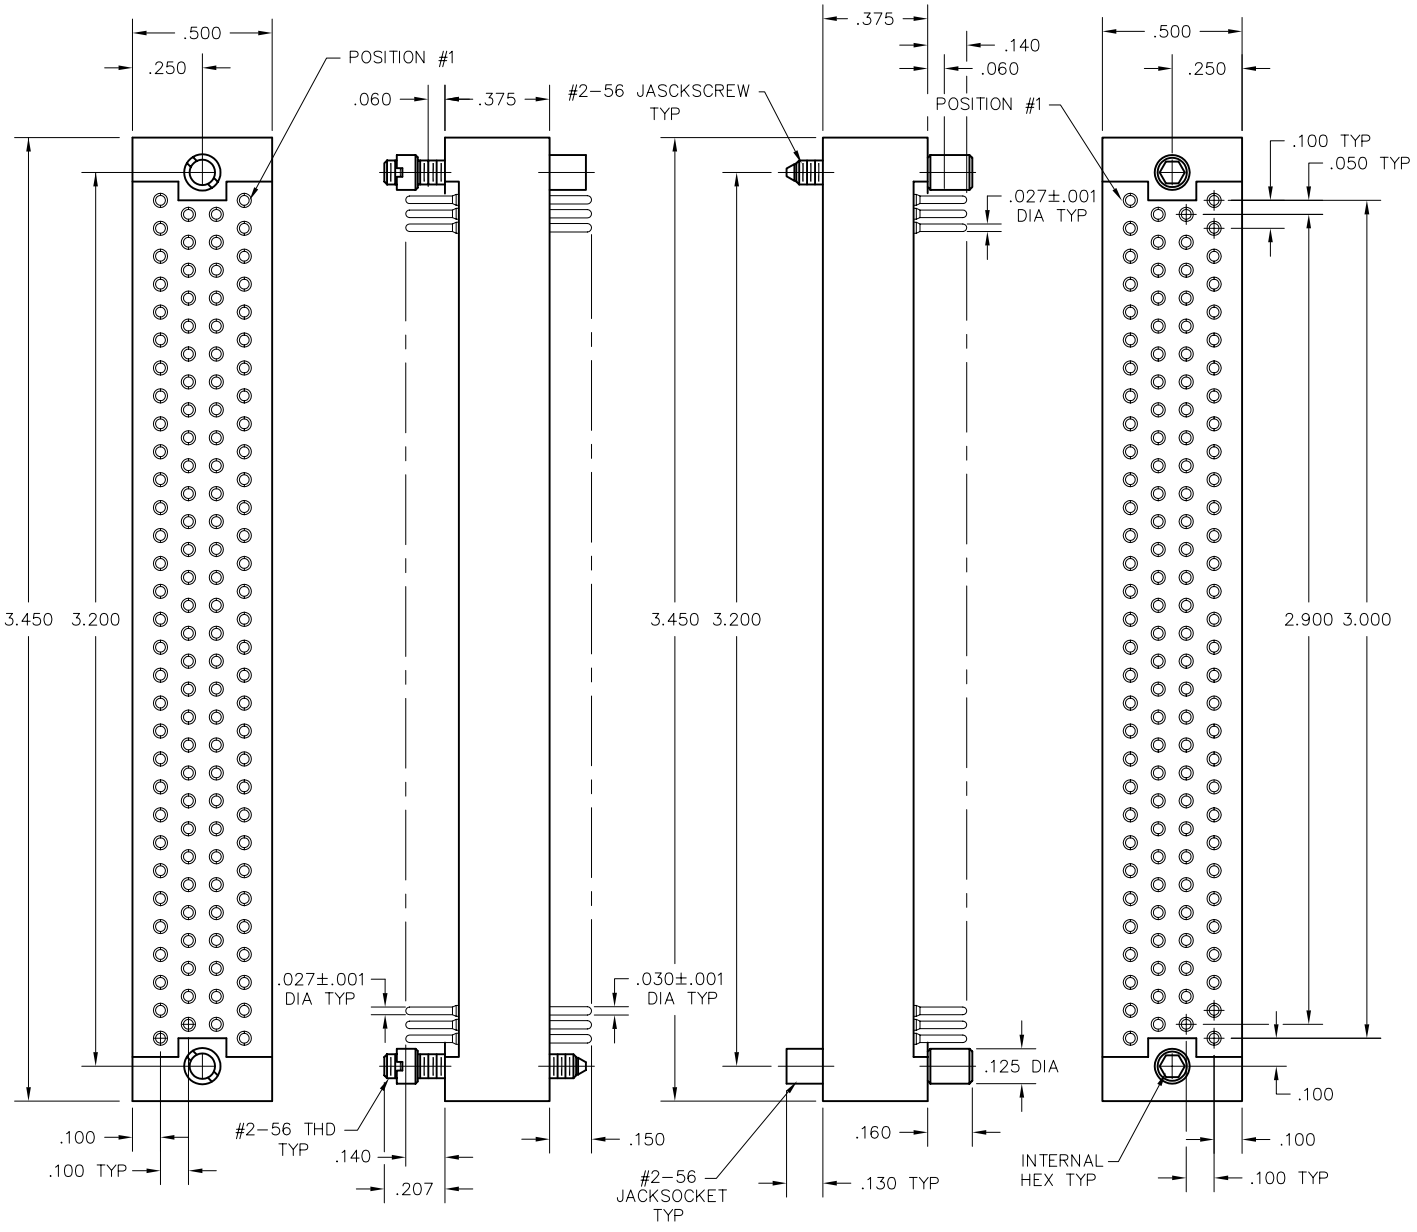

PLUG: WRDV 122 PD9 JL
RECEPTACLE: WRD 122 SAD9 JTA
XXXX XXX XXXX XXX

PLUG		RECEPTACLE	
SERIES			
WRDV	Plug, straight, without mounting ears	WRD	Receptacle, straight, without mounting ears
		WRD	Receptacle, right angle, without mounting ears
SIZE			
122	Number of contacts	122	Number of contacts

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PD15	Pin, straight, dip solder, .234" x .027" dia	SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAF3	Socket, straight, flex circuit, .050"
		SAF6	Socket, straight, flex circuit, .093"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination .150", connector saver
		SOR9	Socket, right angle, dip solder, .140" x .025" dia


HARDWARE			
J	Fixed jackset	J	Fixed jackset
JL	Fixed jackset, long	JL	Fixed jackset, long
JTA	Turning jackset, .160"	JTA	Turning jackset, .160"
JTB	Hex turning jackset, .160"	JTB	Hex turning jackset, .160"
JTL	Long turning jackset, .660"	JTL	Long turning jackset, .660"
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized

OPTIONS

- Option Codes: Add to the end of the part number. Example: WRD122SAD9SY-D01. Call factory for additional codes.

-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 special codes

☒ = Option not RoHS compliant

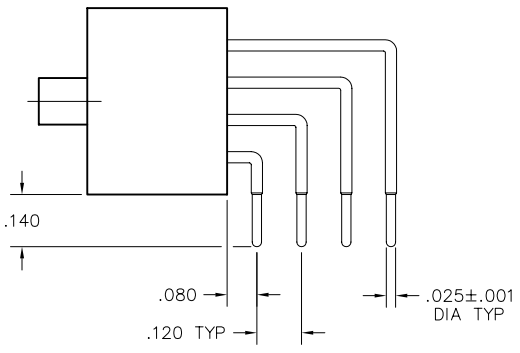


EXAMPLE: WRD122SOR9J


AirBorn

4 · ROW
PC Card to Cable
.100"

WRD - WRDDXA

122 Contacts

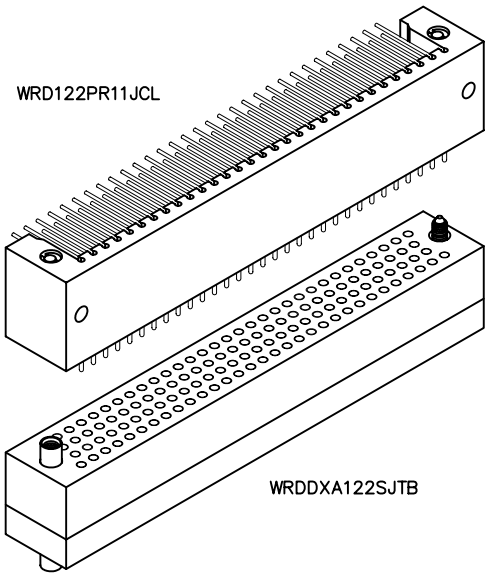

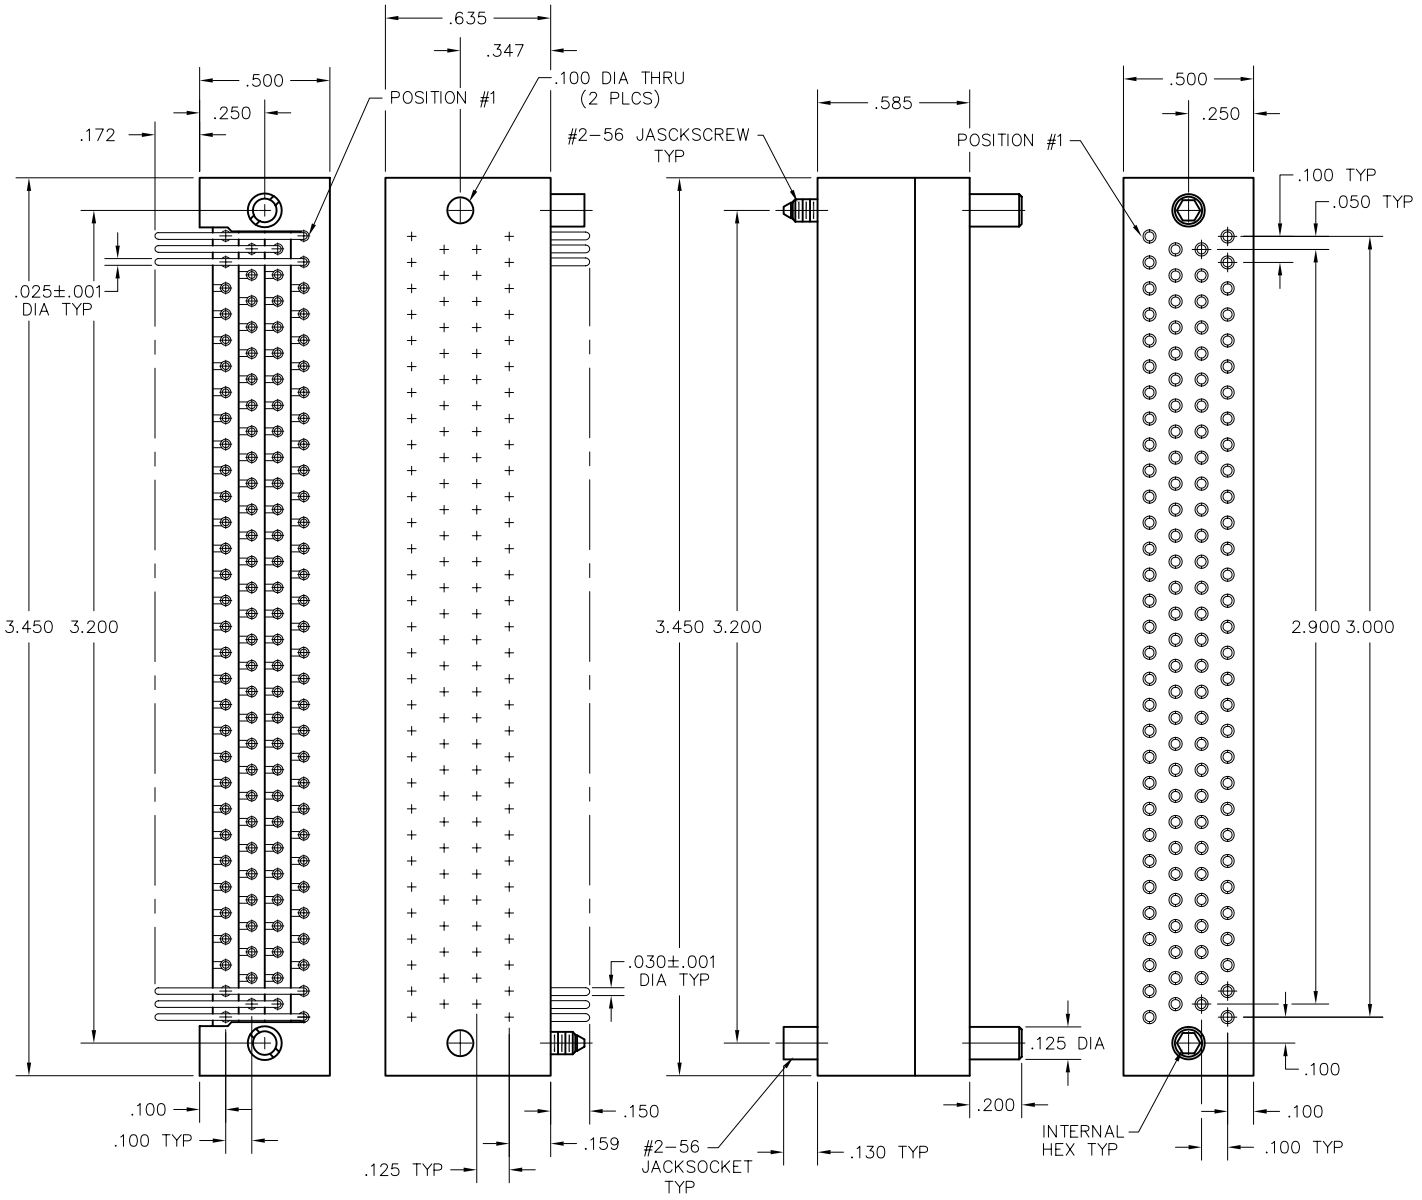

PLUG

RECEPTACLE

PLUG: WRD 122 PR11 JCL
RECEPTACLE: WRDDXA 122 S JTB
XXXXX XX XXX XX

PLUG	RECEPTACLE

SERIES

WRD Plug, right angle, without mounting ears	WRDDXA Receptacle, straight, crimp removable, without mounting ears

- WRDDXA mates with WRD and WRDV connectors. "A" means contacts are included.

SIZE

122 Number of contacts	122 Number of contacts

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WRDDXA** includes full complement of WTK2222 (S or PA) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia	S	Socket, straight, crimp removable, 22 AWG
PR9	Pin, right angle, dip solder, .140" x .025" dia	SA	Same as above
PR11	Pin, right angle, dip solder, .172" x .025" dia	P	Pin, straight, crimp removable, 22 AWG


HARDWARE

JCL	Fixed jackset, cross hole mount	SY	Guide set
SYCL	Guide set, cross hole mount	SY-#	Guide set, polarized
SYCL-#	Guide set, cross hole mount, polarized	SYL	Guide set, long
		JTA	Turning jackset, .200"
		JTB	Hex turning jackset, .200"
		JTL	Long turning jackset, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WRDDXA122SSY-C45. Call factory for additional codes.

-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

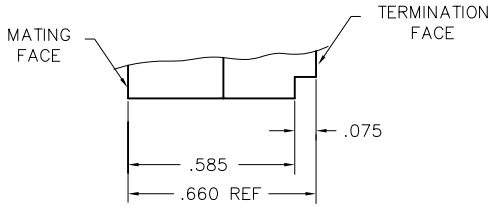

DETAIL A


AirBorn


2 · ROW
Coax Connectors PC Card to Board or Chassis

.100"

WTB - WTB

20-3 Contacts

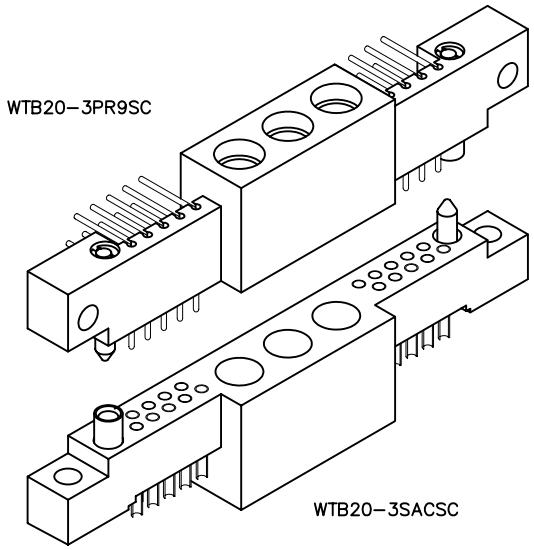

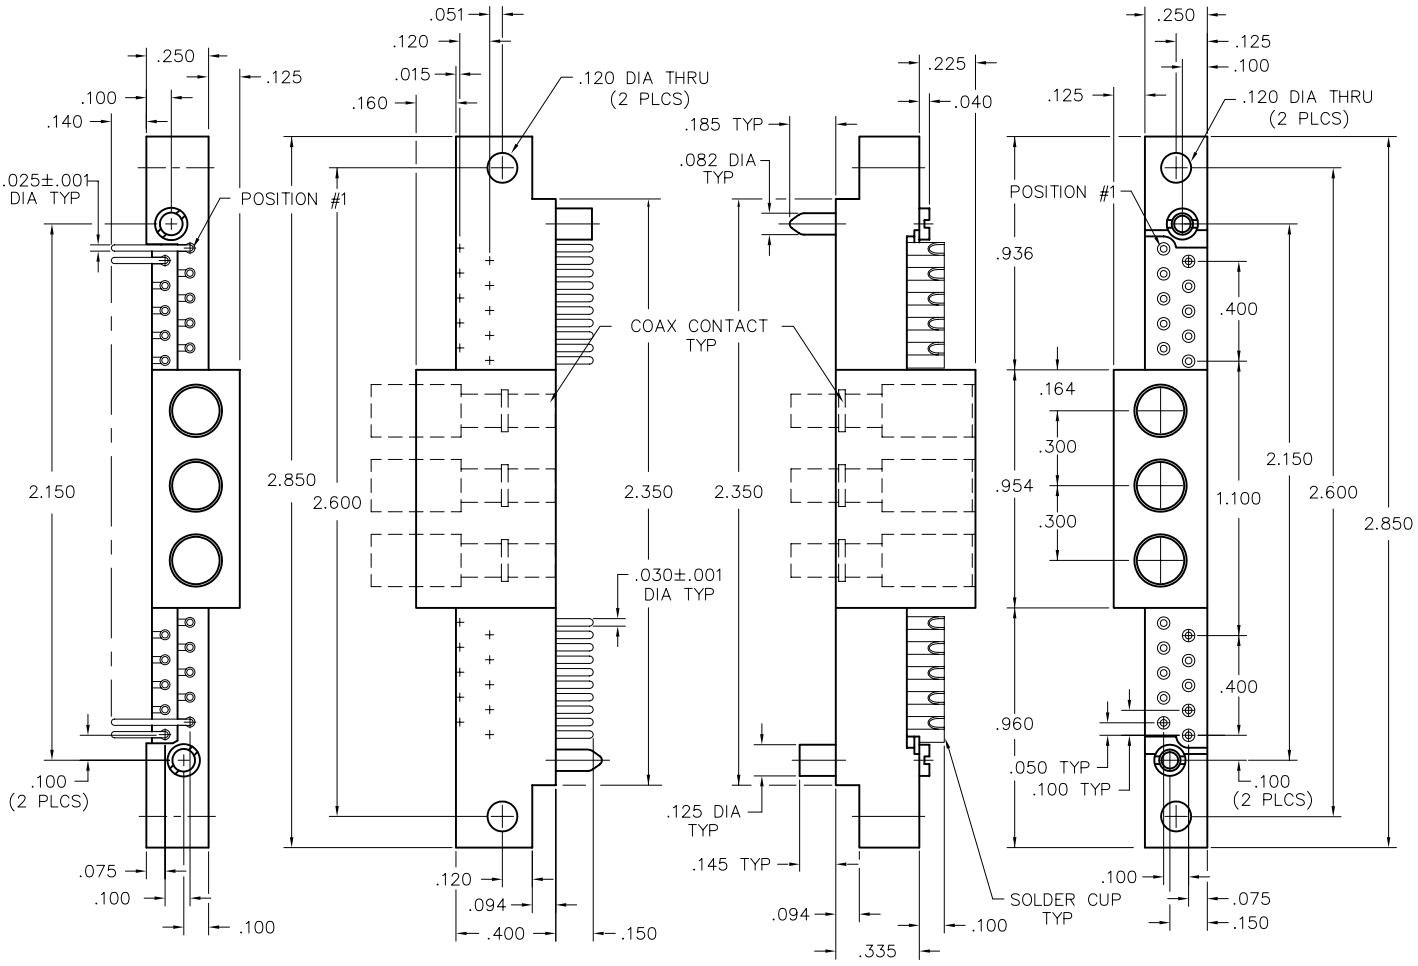

PLUG

RECEPTACLE

PLUG: WTB 20–3 PR9 SC
RECEPTACLE: WTB 20–3 SAC SC
XXX XXXX XXX XX

PLUG		RECEPTACLE	
SERIES			
WTB	Plug, right angle, with mounting ears	WTB	Receptacle, straight, with mounting ears
SIZE			
20-3	20 right angle signal pins, plus 3 straight or right angle removable coax sockets	20-3	20 straight signal pins, plus 3 straight removable coax pins
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
HARDWARE			
SC	Guide set	SC	Guide set
SC-#	Guide set, polarized	SC-#	Guide set, polarized

OPTIONS

- Molded insulator: Diallyl Phathalate per ASTM-D5948 (GDI-30F or SDG-F)
- Removable type coax contacts sold separately. See "Coax Contacts" in Accessories section for instructions.
- Coax Contacts:
  WTC188P = straight pin (to be installed in receptacle insulator only)
  WTC196P = straight pin (to be installed in receptacle insulator only)
  WTC085P = straight pin (to be installed in receptacle insulator only)
  WTC188S = straight socket (to be installed in plug insulator only)
  WTC196S = straight socket (to be installed in plug insulator only)
  WTC085S = straight socket (to be installed in plug insulator only)
  WTC10SRD9 = right angle socket (to be installed in plug insulator only)
- Option Codes: Add to the end of the part number. Example: WTB20-3SAD11SC-C34. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-C34 Remove .225" standoff so connector is flush to board (receptacle only).
-G69 Solder cups are fixed in an outward orientation, otherwise contacts can rotate.
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant


AirBorn


2 · ROW
Coax Connectors PC Card to Board or Chassis

.100"

WTB - WTB

20-6 Contacts

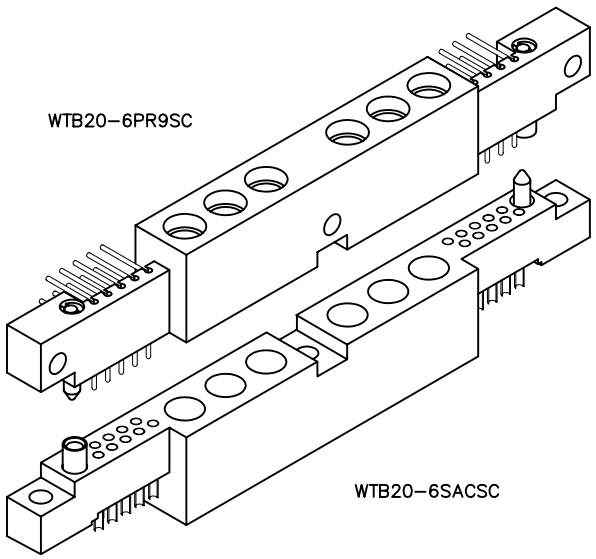

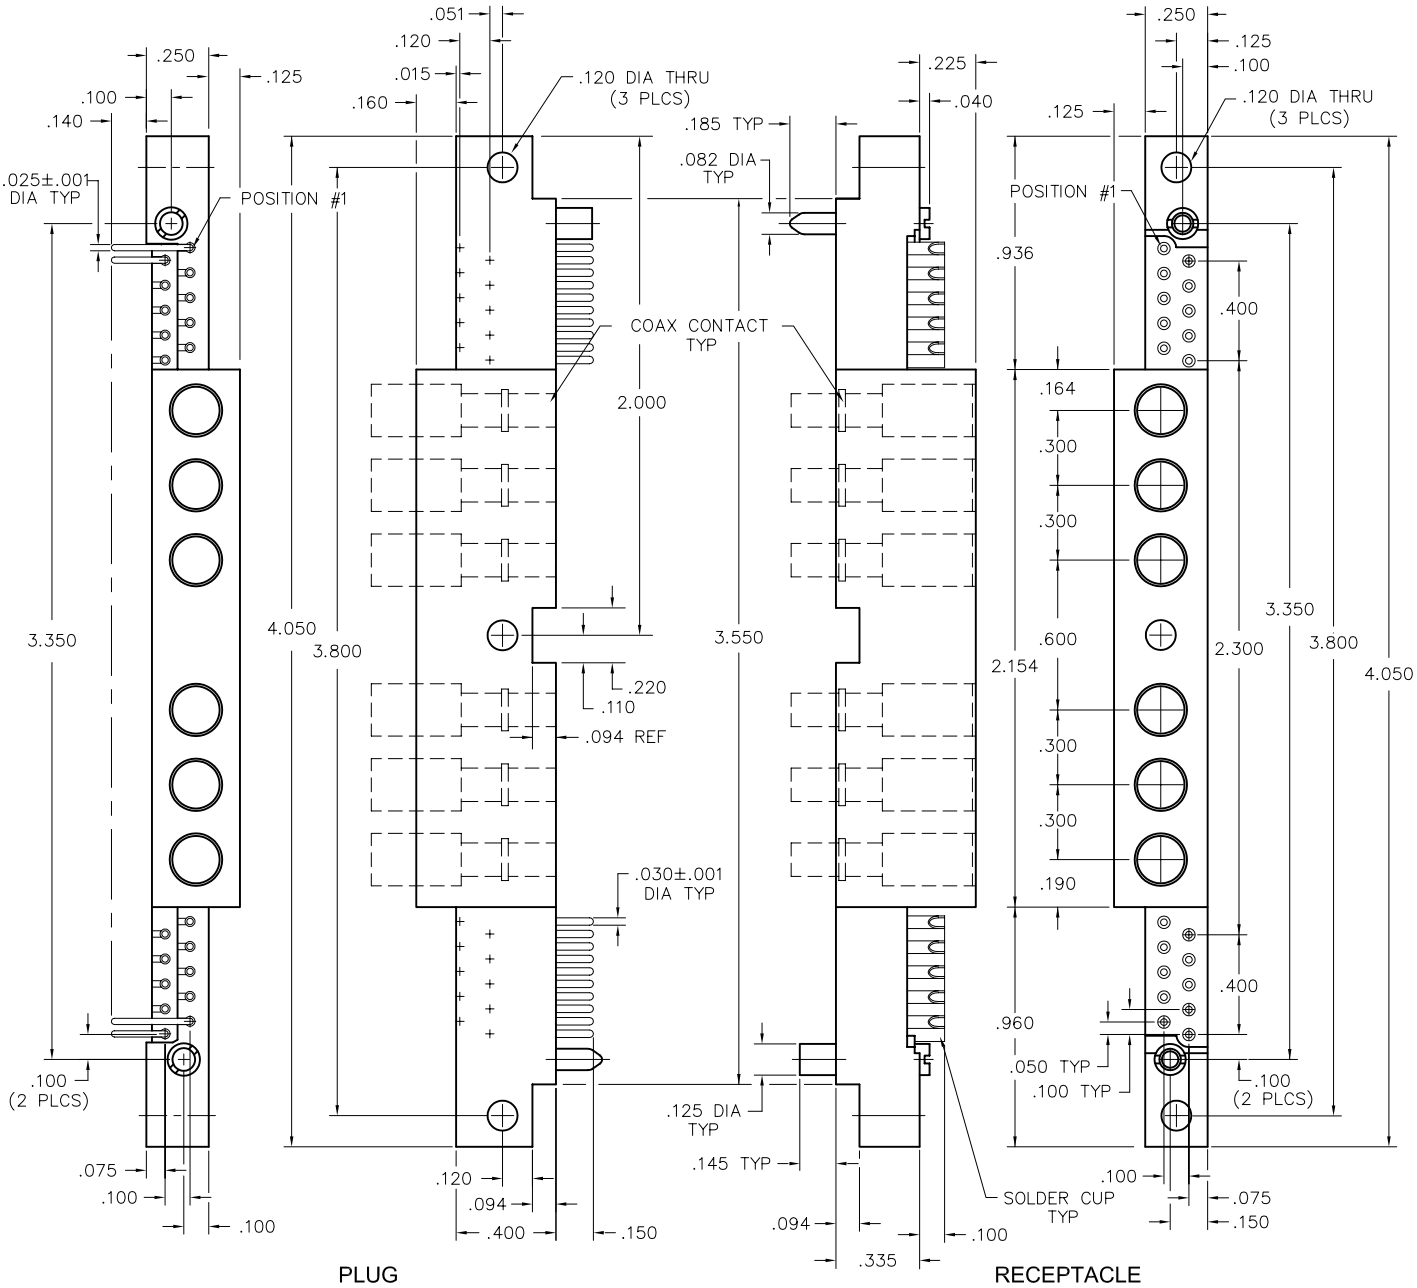

AirBorn

PLUG: WTB 20–6 PR9 SC
RECEPTACLE: WTB 20–6 SAC SC
XXX XXXX XXX XX

PLUG		RECEPTACLE	
SERIES			
WTB	Plug, right angle, with mounting ears	WTB	Receptacle, straight, with mounting ears
SIZE			
20-6	20 right angle signal pins, plus 6 straight or right angle removable coax sockets	20-6	20 straight signal pins, plus 6 straight removable coax pins
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
HARDWARE			
SC	Guide set	SC	Guide set
SC-#	Guide set, polarized	SC-#	Guide set, polarized

OPTIONS

- Molded insulator: Diallyl Phathalate per ASTM-D5948 (GDI-30F or SDG-F)
- Removable type coax contacts sold separately. See "Coax Contacts" in Accessories section for instructions.
- Coax Contacts:
  WTC188P = straight pin (to be installed in receptacle insulator only)
  WTC196P = straight pin (to be installed in receptacle insulator only)
  WTC085P = straight pin (to be installed in receptacle insulator only)
  WTC188S = straight socket (to be installed in plug insulator only)
  WTC196S = straight socket (to be installed in plug insulator only)
  WTC085S = straight socket (to be installed in plug insulator only)
  WTC10SRD9 = right angle socket (to be installed in plug insulator only)

- Option Codes: Add to the end of the part number. Example: WTB20-6SAD9SC342. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-C34 Remove .225" standoff so connector is flush to board (receptacle only).
-G69 Solder cups are fixed in an outward orientation, otherwise contacts can rotate.
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant

AirBorn


3 · ROW


Coax Connectors PC Card to Chassis or Board


.100"

WG - WG


47-1 Contacts

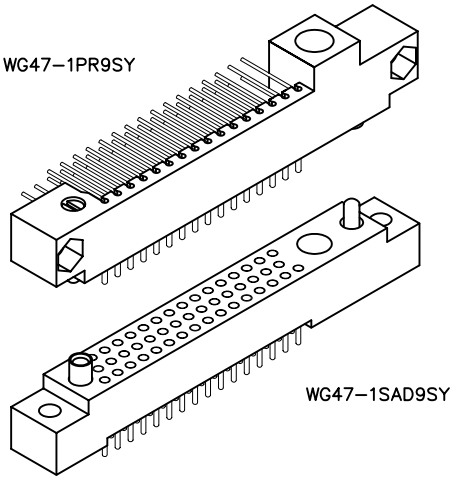

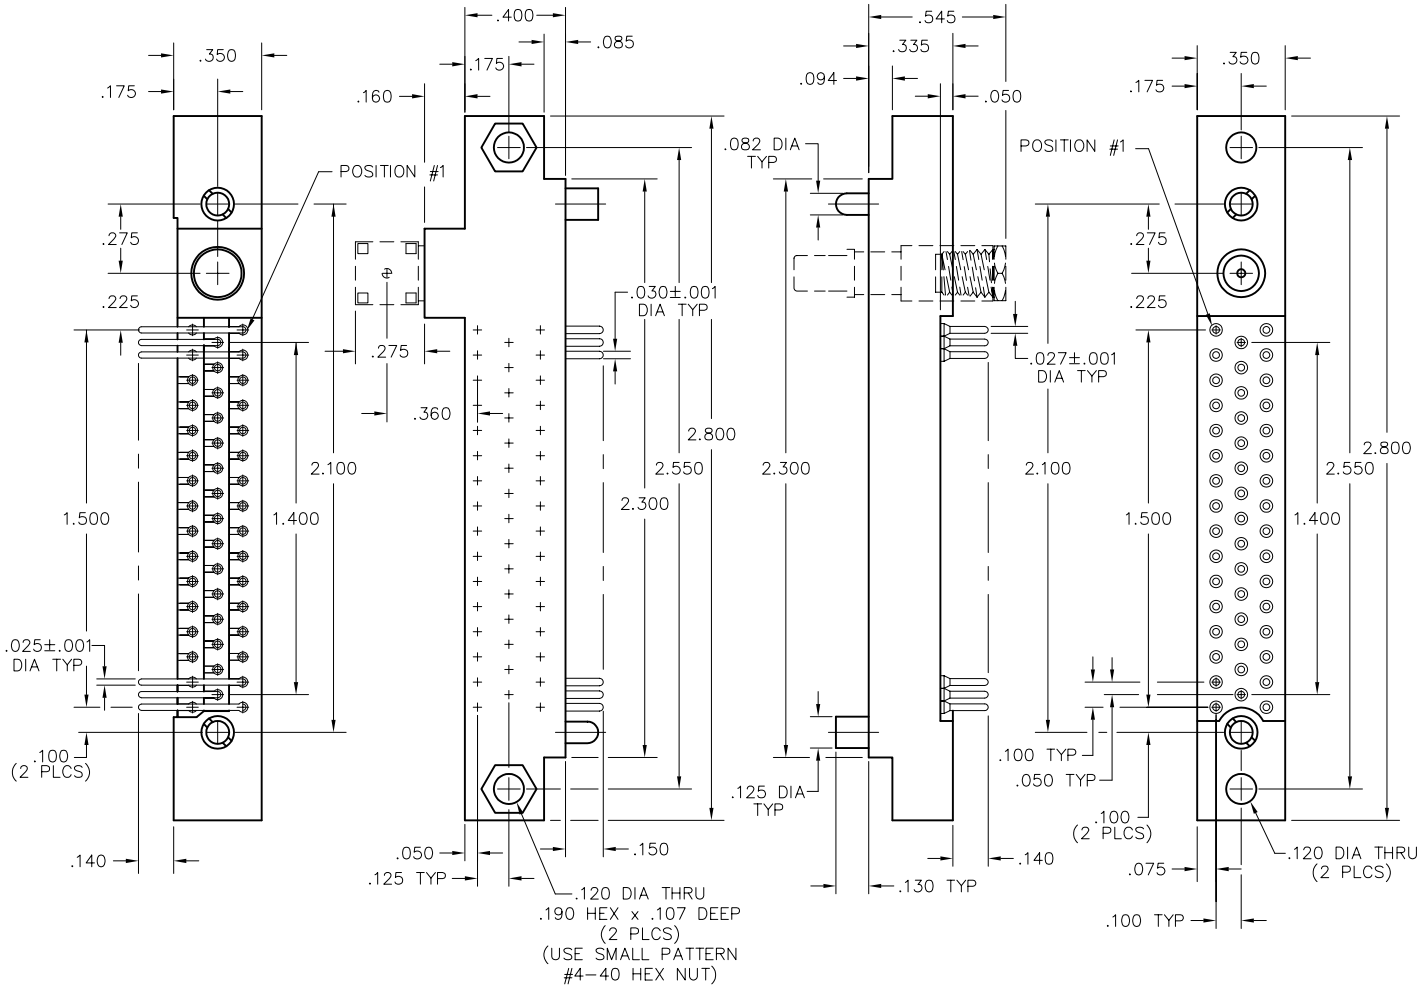

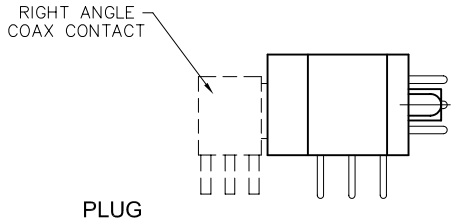

PLUG

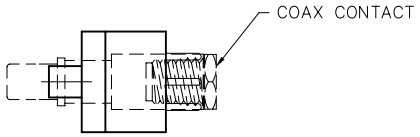

RECEPTACLE

AirBorn

PLUG: WG 47–1 PR11 SY
RECEPTACLE: WG 47–1 SAD9 SY
XX 47–1 XXXX XX


PLUG		RECEPTACLE	
SERIES			
WG	Plug, right angle, with mounting ears	WG	Receptacle, straight, with mounting ears
SIZE			
47-1	47 right angle signal pins, plus 1 right angle or straight removable coax socket	47-1	47 straight signal pins, plus 1 straight removable coax pin
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
HARDWARE			
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized

OPTIONS


- Molded insulator (plug only): Diallyl Phathalate per ASTM-D5948 (GDI-30F or SDG-F)
- Removable type coax contacts sold separately. See "Coax Contacts" in Accessories section for instructions.
- Coax Contacts: WTC188P = straight pin (to be installed in receptacle insulator only)
  WTC196P = straight pin (to be installed in receptacle insulator only)
  WTC085P = straight pin (to be installed in receptacle insulator only)
  WTC188S = straight socket (to be installed in plug insulator only)
  WTC196S = straight socket (to be installed in plug insulator only)
  WTC085S = straight socket (to be installed in plug insulator only)
  WTC10SRD9 = right angle socket (to be installed in plug insulator only)
- Option Codes: Add to the end of the part number. Example: WG47-1SACSY-C34. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-C34 Remove .225" standoff so connector is flush to board (receptacle only).
-G69 Solder cups are fixed in an outward orientation, otherwise contacts can rotate.
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC 305 solder (lead free).


☒ = Option not RoHS compliant

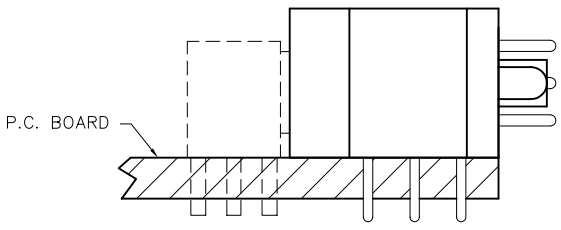

WG47-1PR9SY
P.C. BOARD EXAMPLE



WG47-1SAD9SY
MOTHERBOARD EXAMPLE

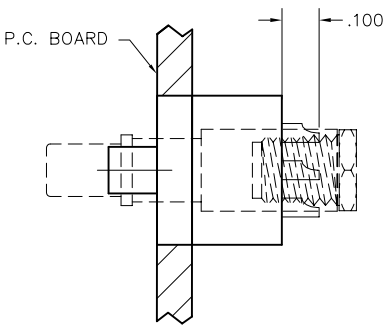



WG47-1SACSY
CHASSIS EXAMPLE

AirBorn

1 • ROW
Coax Connectors PC Card to Chassis
.300"

WRBC - WRBC
1, 7 & 11 Contacts

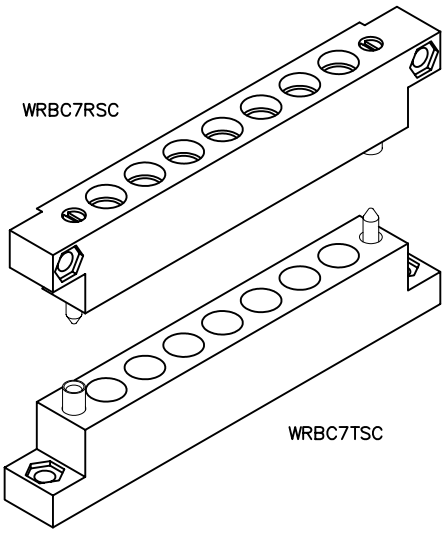

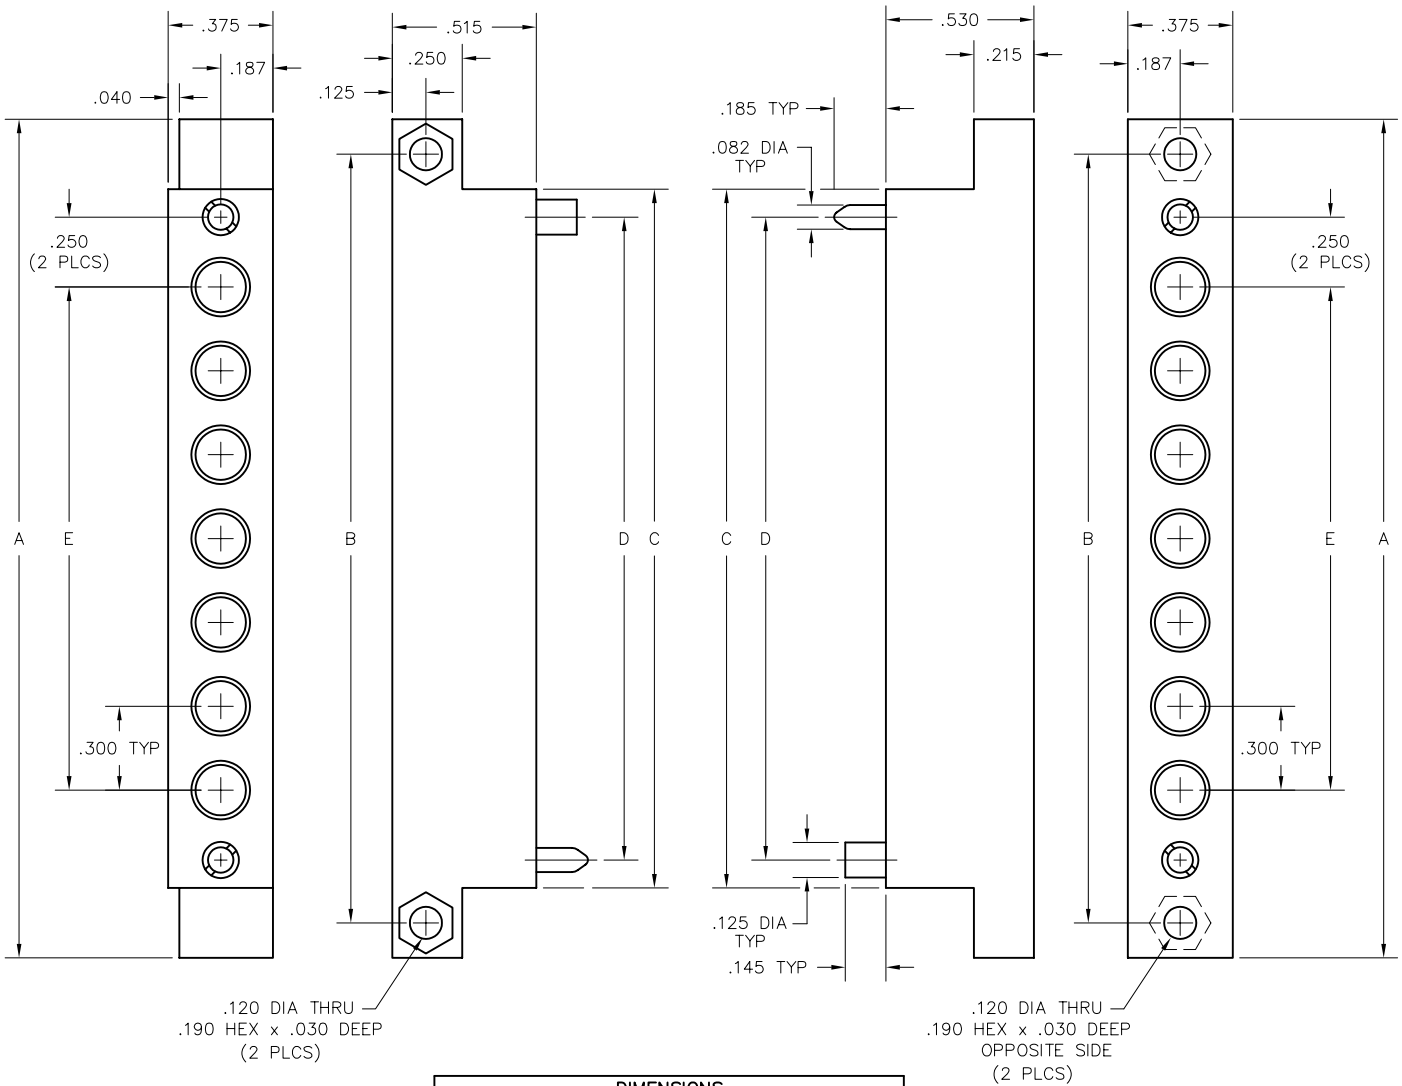

PLUG

RECEPTACLE

DIMENSIONS					
SIZE	A	B	C	D	E
1*	.875	.625	.375	—	—
7	3.000	2.750	2.500	2.300	1.800
11	4.200	3.950	3.700	3.500	3.000

* = SEE OPPOSITE PAGE FOR 1 POSITION CONFIGURATION


Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

PLUG:	WRBC	7	R	SC
RECEPTACLE:	WRBC	7	T	SC
	XXXX	XX	X	XX


PLUG	RECEPTACLE
SERIES	
WRBC Plug, right angle, with mounting ears	WRBC Receptacle, straight, with mounting ears
SIZE	
XX Number of coax contacts (1, 7 or 11)	XX Number of coax contacts (1, 7 or 11)
CONTACTS	
R TYPE CONTACTS/TERMINATIONS: Sockets, straight or right angle, removable coax contacts	T TYPE CONTACTS/TERMINATIONS: Pins, straight, removable coax contacts
HARDWARE	
SC Guide set SC-# Guide set, polarized	SC Guide set SC-# Guide set, polarized

OPTIONS


- Removable type coax contacts sold separately. See "Coax Contacts" in Accessories section for instructions.
- Coax Contacts: WTC188P = straight pin (to be installed in receptacle insulator only)
  WTC196P = straight pin (to be installed in receptacle insulator only)
  WTC085P = straight pin (to be installed in receptacle insulator only)
  WTC188S = straight socket (to be installed in plug insulator only)
  WTC196S = straight socket (to be installed in plug insulator only)
  WTC085S = straight socket (to be installed in plug insulator only)
  WTC10SRD9 = right angle socket (to be installed in plug insulator only)

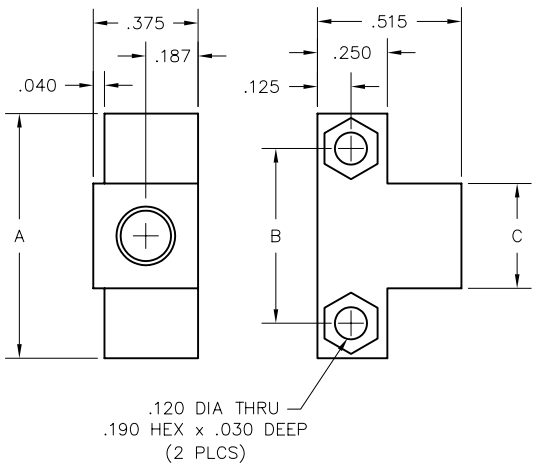


WRBC1R

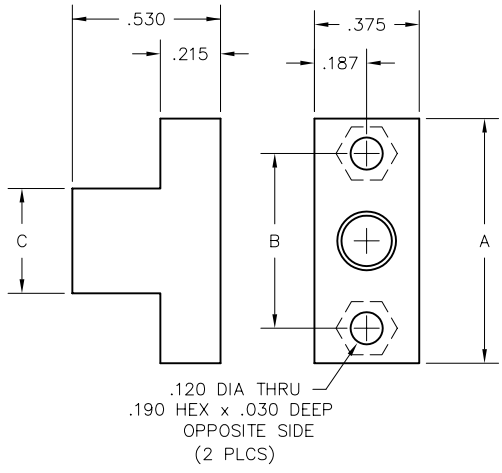

WRBC1T

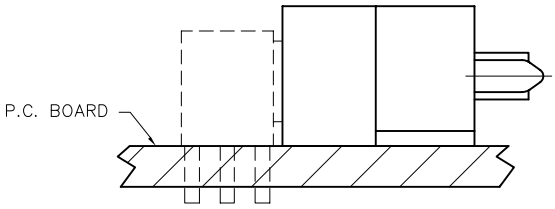

WRBC7RSC
P.C. BOARD EXAMPLE

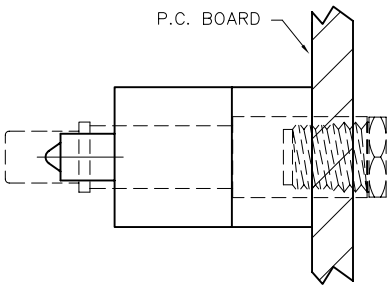

WRBC7TSC
MOTHERBOARD EXAMPLE


MISC. CONNECTORS


Power Cable to Chassis

.225"

PA - PA

5 & 4-5 Contacts

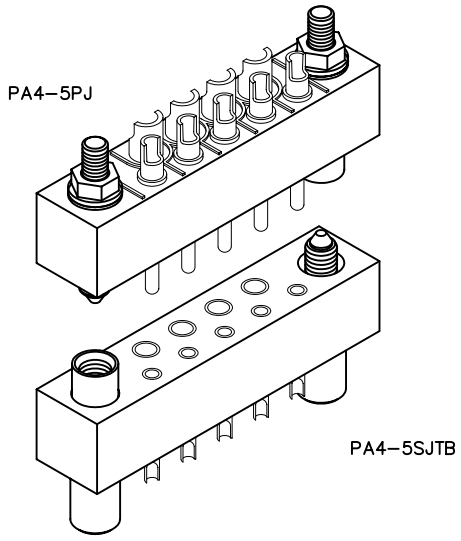

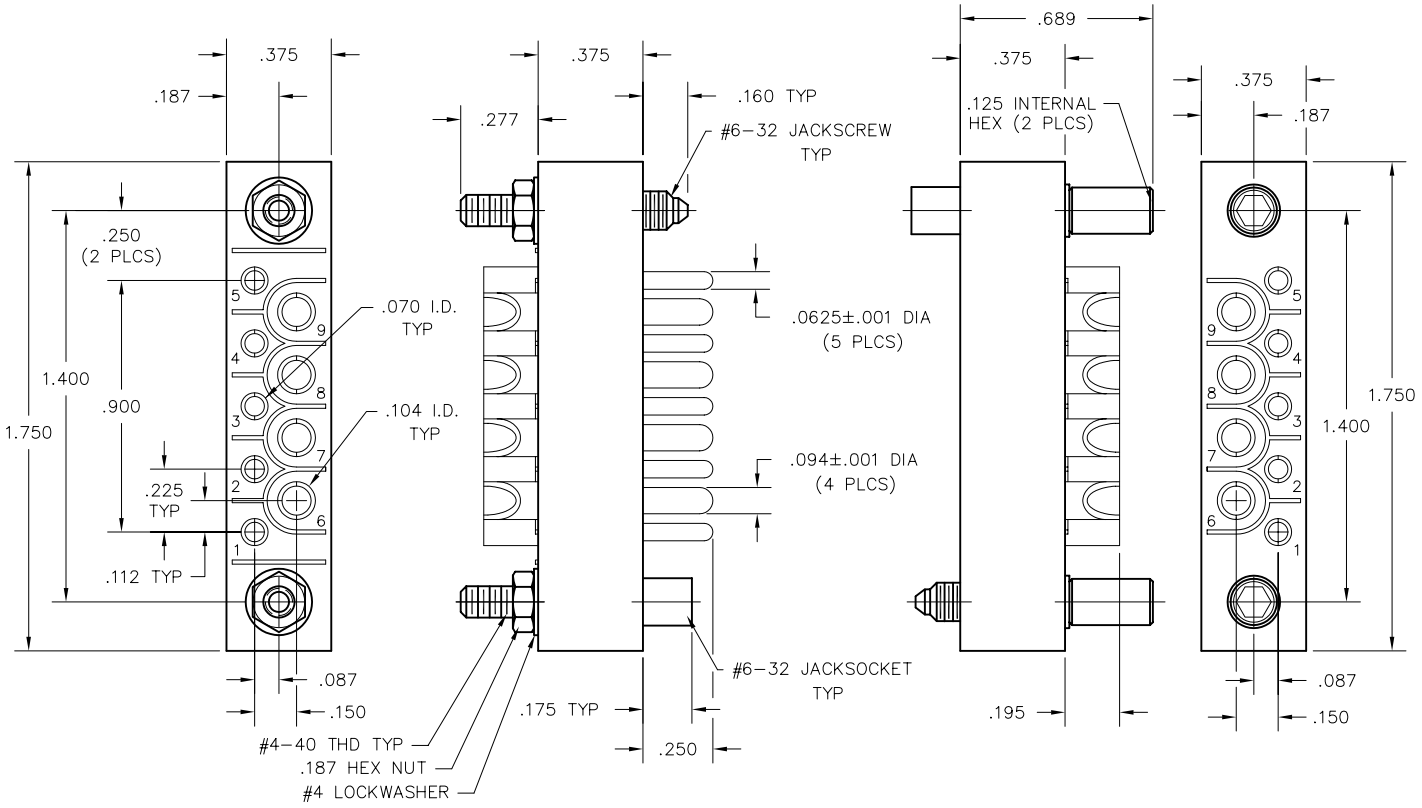

PLUG

RECEPTACLE

SEE OPPOSITE PAGE FOR 5 POSITION CONFIGURATION.
SEE PAGE W–77 & W–78 FOR 10 POSITION CONFIGURATION.

PLUG:	PA	4–5	S	JTB
RECEPTACLE:	PA	4–5	P	J
	XX	XXX	X	XXX

PLUG		RECEPTACLE	
SERIES			
PA	Power connectors	PA	Power connectors
SIZE			
5	5 #12 contacts	5	5 #12 contacts
4-5	4 #12 contacts & 5 #16 contacts	4-5	4 #12 contacts & 5 #16 contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, solder cup	S	Socket, straight, solder cup
PD11	Pin, straight, dip solder, .172" x .062" dia	SD11	Socket, straight, dip solder, .172" x .062" dia
HARDWARE			
SY	Guide set	SY	Guide set
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, 1.054"	JT	Turning jackset, 1.054"
JTB	Hex turning jackset, .314"	JTB	Hex turning jackset, .314"
JTL	Long turning jackset, 1.175"	JTL	Long turning jackset, 1.175"


OPTIONS

- Hood (PA5H) for use with PA5 and PA4-5 connectors. Specify JTL hardware when using hood.
- For hood strain relief, add "H" to "JTL" hardware. Example: PA5SJTLH.
- Option Codes: Add to the end of the part number. Example: PA5PD11SY-P39. Call factory for additional codes.

-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant

NOTES:
Molded bodies: Diallyl phthalate per ASTM-D5948 (GDI-30F or SDG-F)
Contact rating: #12 contacts = 23 amps
#16 contacts = 13 amps
Contact material: Socket - Beryllium copper, gold plated
Pin - Brass gold plated
Contact plating: Nominal Au plating thickness is 20 microinches on mating surfaces
Test voltage: 2000 VRMS @ sea level; 460 VRMS @ 70,000 feet
Contact resistance: #12 contacts=.023 volt maximum drop @ 23 amps (.001 ohms)
#16 contacts=.023 volt maximum drop @ 13 amps (.002 ohms)
Engagement force: 24 ounces maximum average per contact

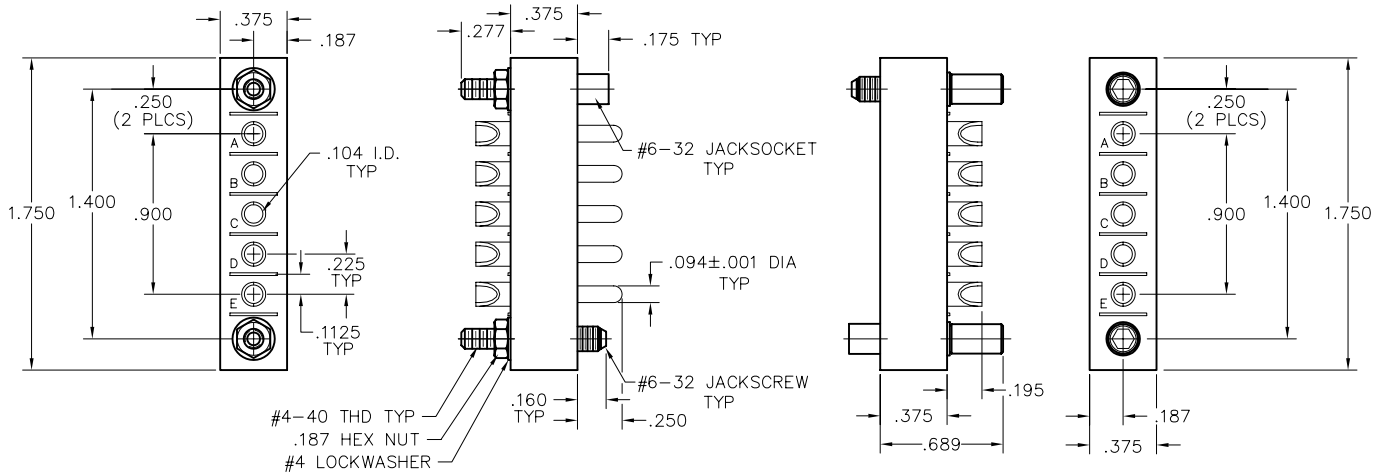

PLUG
EXAMPLE: PA5PJ

RECEPTACLE
EXAMPLE: PA5SJTB


MISC. CONNECTORS


Power Cable to Chassis

.225"

PA - PA

10 Contacts

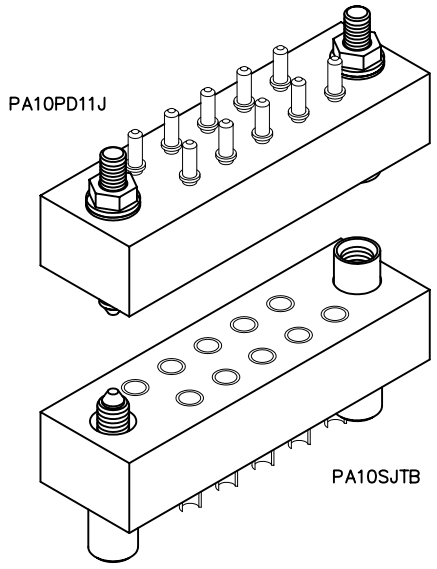

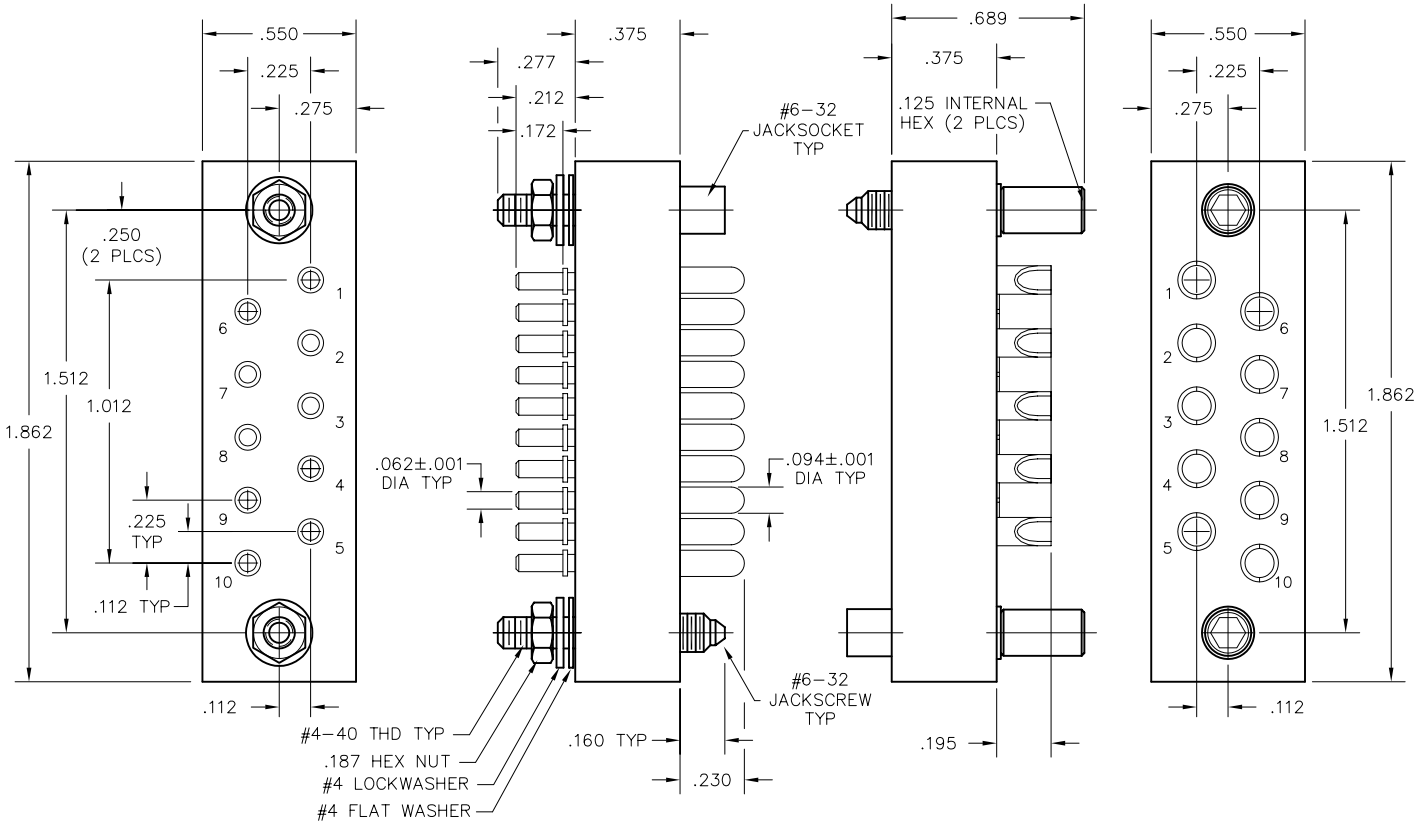

PLUG RECEPTACLE

SEE OPPOSITE PAGE FOR 10 POSITION RIGHT ANGLE PLUG CONFIGURATION.

PLUG:	PA	10	S	JTB
RECEPTACLE:	PA	10	P	J
	XX	XX	X	XXX

PLUG		RECEPTACLE	
SERIES			
PA	Power connectors	PA	Power connectors
SIZE			
10	10 #12 contacts	10	10 #12 contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, solder cup	S	Socket, straight, solder cup
PD11	Pin, straight, dip solder, .172" x .062" dia	SD11	Socket, straight, dip solder, .172" x .062"
PR7	Pin, right angle, dip solder, .109" x .082" dia		
PR8	Pin, right angle, dip solder, .125" x .082" dia		
HARDWARE			
SY	Guide set	SY	Guide set
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, 1.054" (straight plug only)	JT	Turning jackset, 1.054"
JTB	Hex turning jackset, .314" (straight plug only)	JTB	Hex turning jackset, .314"
JTL	Long turning jackset, 1.175"	JTL	Long turning jackset, 1.175"


OPTIONS

- Option Codes: Add to the end of the part number. Example: PA10PD11SY-P39. Call factory for additional codes.

-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant

NOTES:
Molded bodies: Polyphenylene sulfide
Contact rating: #12 contacts = 23 amps
Contact material: Socket - Beryllium copper, gold plated
Pin - Brass gold plated
Contact plating: Nominal Au plating thickness is 20 microinches on mating surfaces
Test voltage: 2000 VRMS @ sea level; 460 VRMS @ 70,000 feet
Contact resistance: .023 volt maximum drop @ 23 amps (.001 ohm)
Engagement force: 24 ounces maximum average per contact

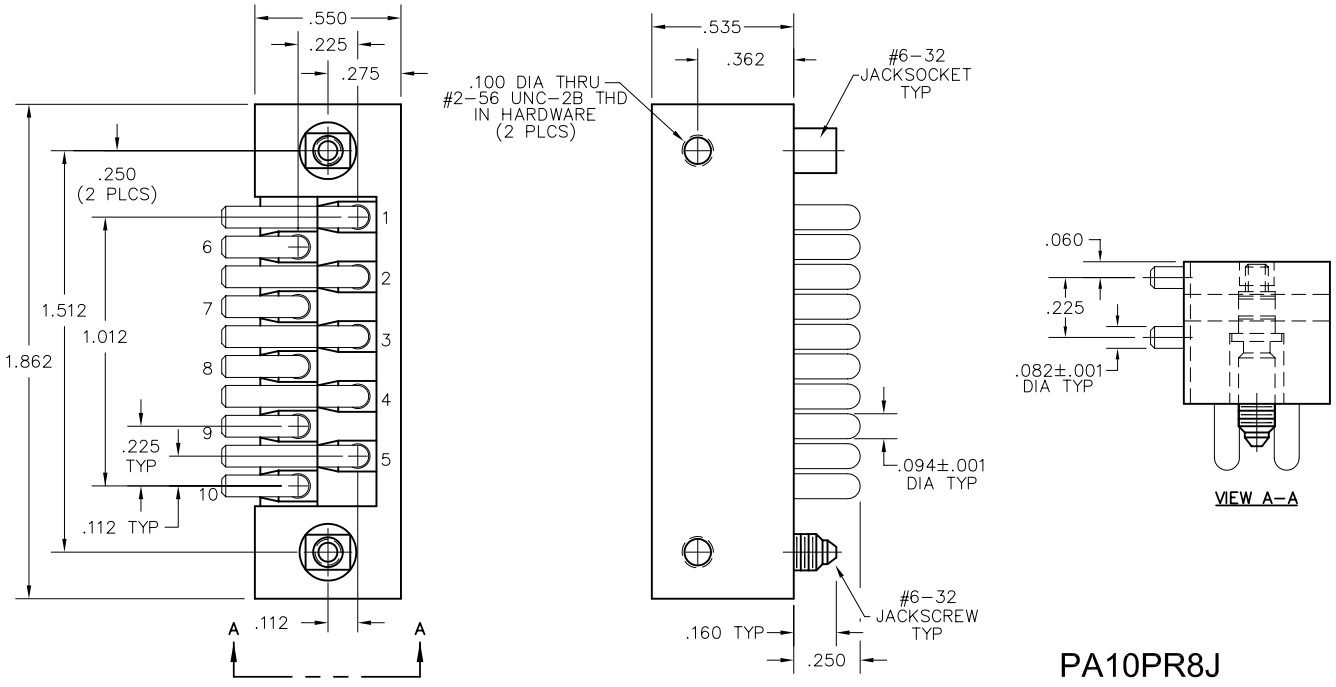

PA10PR8J


MISC. CONNECTORS


Power Cable to Chassis

.225"

PB - PB

20 Contacts

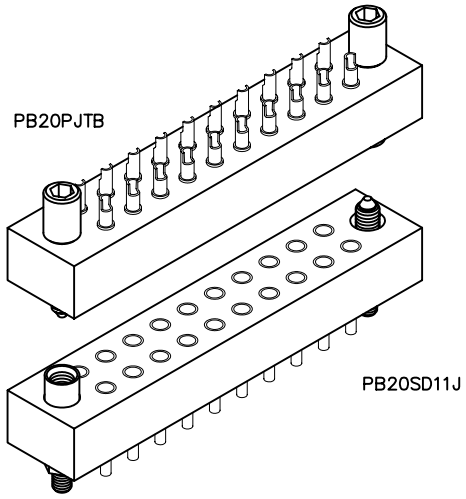

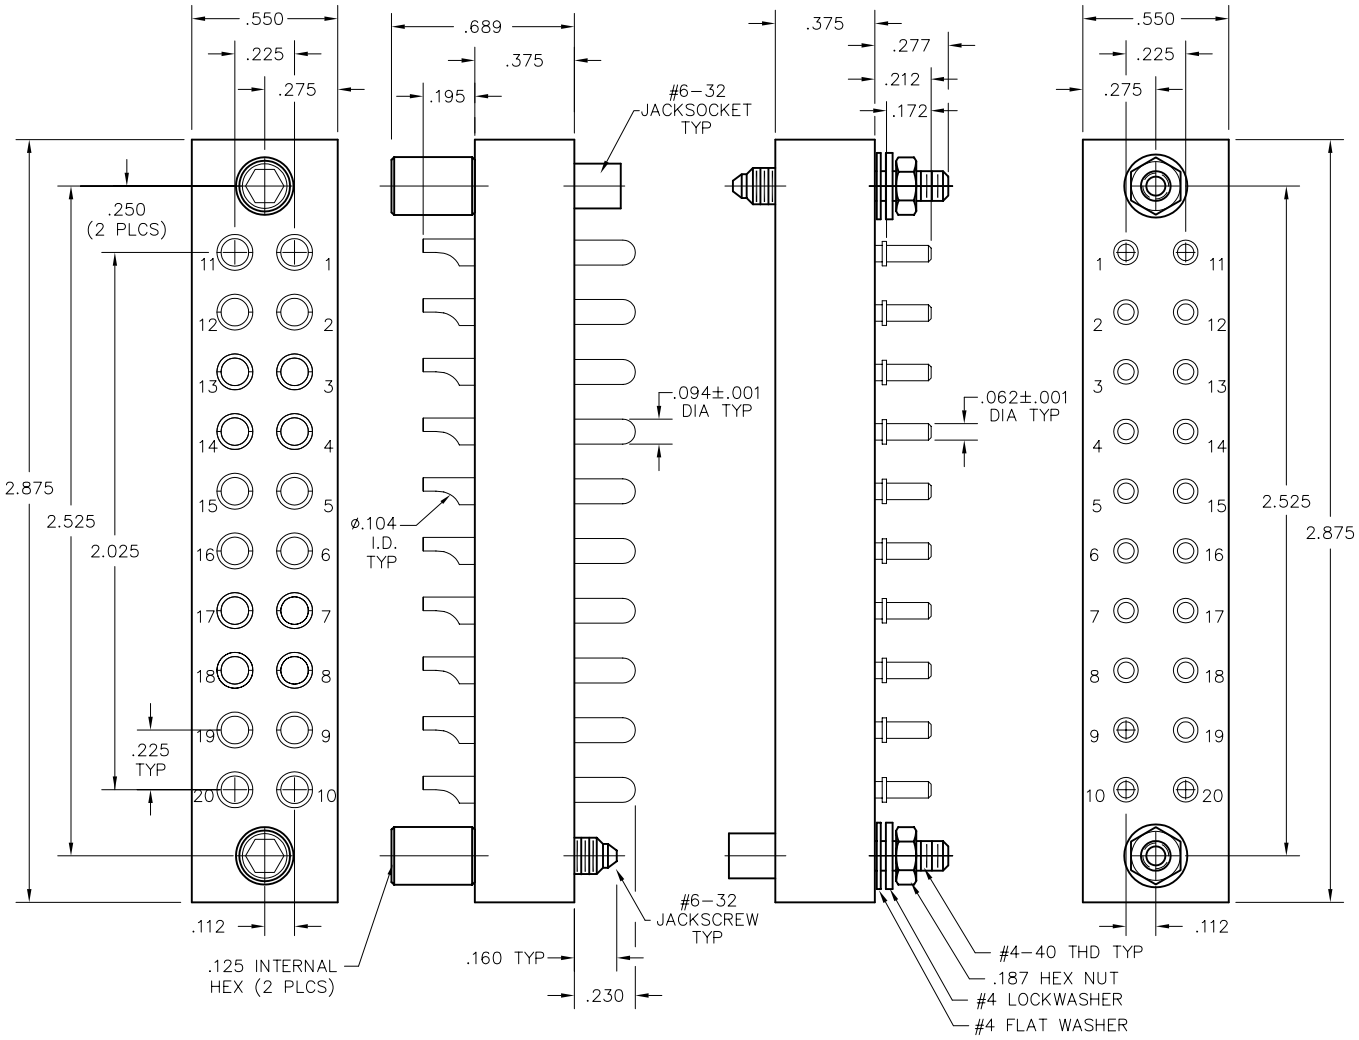

PLUG RECEPTACLE

SEE OPPOSITE PAGE FOR 20 POSITION RIGHT ANGLE PLUG CONFIGURATION.

PLUG:	PB	20	S	JTB
RECEPTACLE:	PB	20	P	J
	XX	XX	X	XXX

PLUG		RECEPTACLE	
SERIES			
PB	Power connectors	PB	Power connectors
SIZE			
20	20 #12 contacts	20	20 #12 contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, solder cup	S	Socket, straight, solder cup
PD11	Pin, straight, dip solder, .172" x .062" dia	SD11	Socket, straight, dip solder, .172" x .062"
PR7	Pin, right angle, dip solder, .109" x .082" dia		
PR8	Pin, right angle, dip solder, .125" x .082" dia		
HARDWARE			
SY	Guide set	SY	Guide set
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, 1.054" (straight plug only)	JT	Turning jackset, 1.054"
JTB	Hex turning jackset, .314" (straight plug only)	JTB	Hex turning jackset, .314"
JTL	Long turning jackset, 1.175"	JTL	Long turning jackset, 1.175"


OPTIONS

- Option Codes: Add to the end of the part number. Example: PA5PD11SY-P39. Call factory for additional codes.

-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant

NOTES:
Molded bodies: Polyphenylene sulfide
Contact rating: #12 contacts = 23 amps
Contact material: Socket - Beryllium copper, gold plated
Pin - Brass gold plated
Contact plating: Nominal Au plating thickness is 20 microinches on mating surfaces
Test voltage: 2000 VRMS @ sea level; 460 VRMS @ 70,000 feet
Contact resistance: .023 volt maximum drop @ 23 amps (.001 ohm)
Engagement force: 24 ounces maximum average per contact

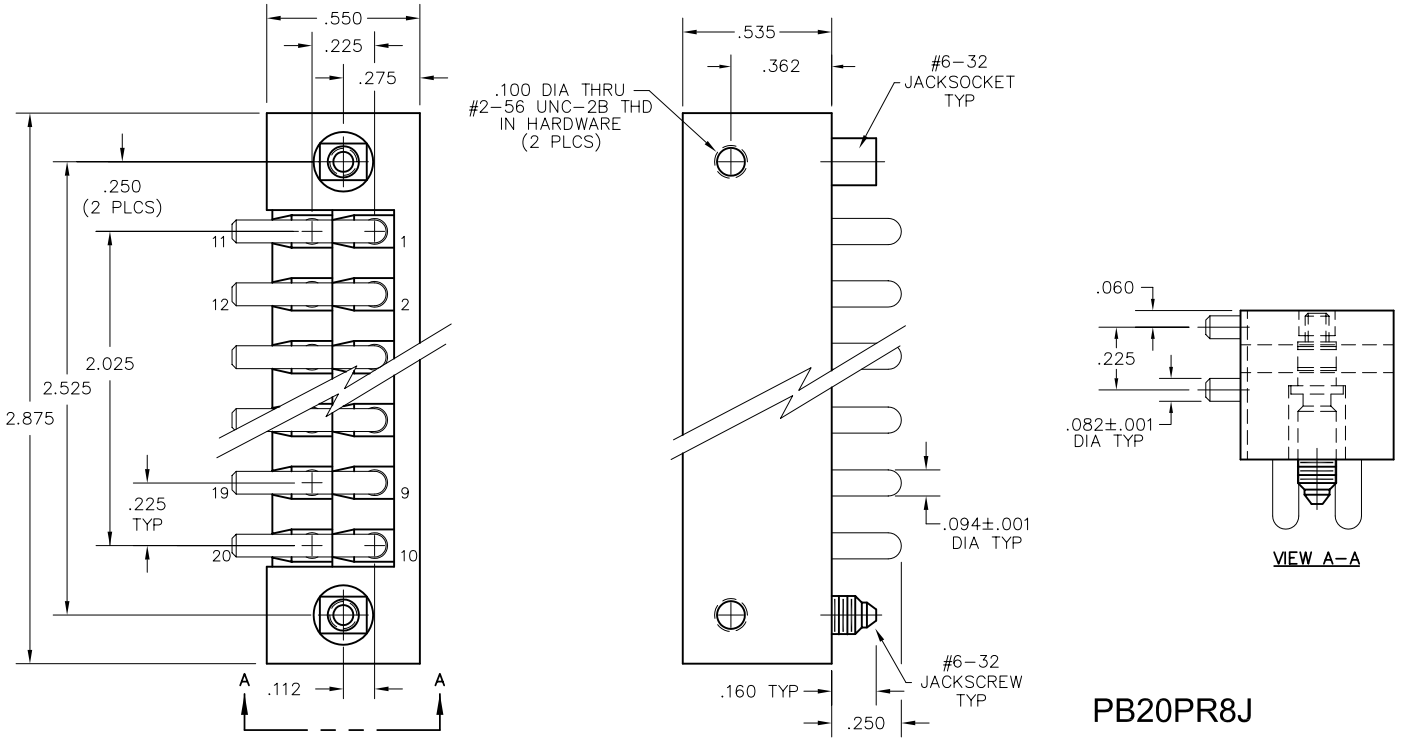


PB20PR8J


MISC CONNECTORS
Quarter Round Sandwich Boards

.087" x .050"

WTA - WTA


59 Contacts

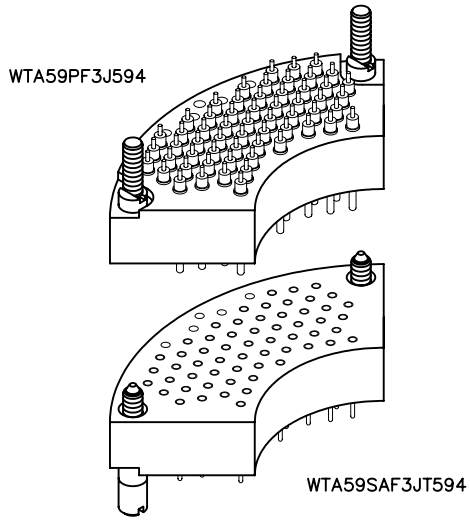

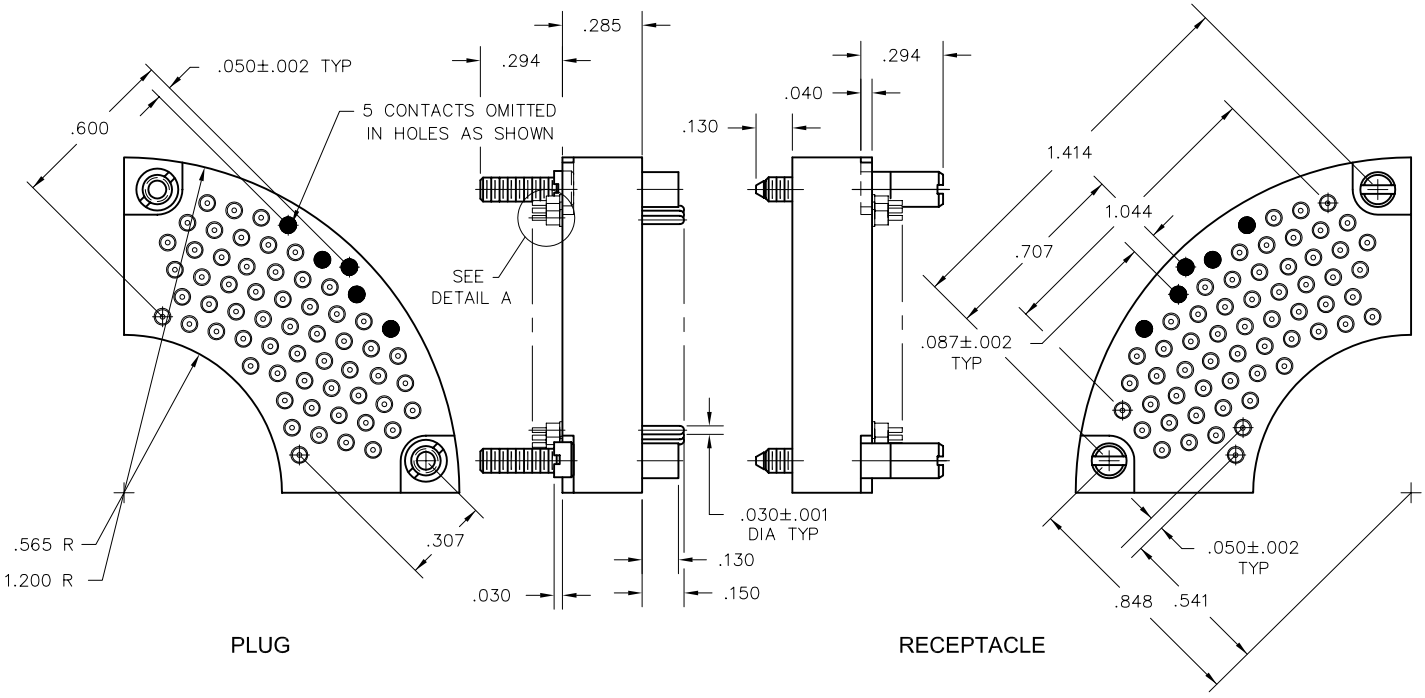

PLUG

RECEPTACLE

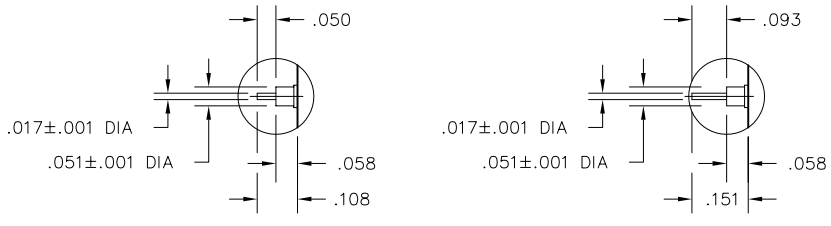

PF3/SAF3

PF6/SAF6

DETAIL A

PLUG:	WTA	59	PF3 J594
RECEPTACLE:	WTA	59	SAF3 JT594
	XXX	XX	XXXX XXXXX

PLUG		RECEPTACLE	
SERIES			
WTA	Plug, straight	WTA	Receptacle, straight
SIZE			
59	Number of contacts	59	Number of contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PF3	Pin, straight, flex circuit, .050"	SAF3	Socket, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"	SAF6	Socket, straight, flex circuit, .093"
HARDWARE			
J594	Fixed jacksockets	JT594	Turning jackscrews, slot head
		JTB594	Turning jackscrews, 5/64" internal hex head

OPTIONS

- The connector is loaded with 59 contacts in a 64 position quarter round insulator (-594).
- Insulator: glass filled nylon per ASTM-D4066.
- Not recommended for use with lead free solder process.
- To order connector without hardware, leave hardware designator out of part number. Example: WTA59SAF3-594.


MISC CONNECTORS


Pin Protected PC Card to Board

.100"

WTE - WTE

10 & 20 Contacts

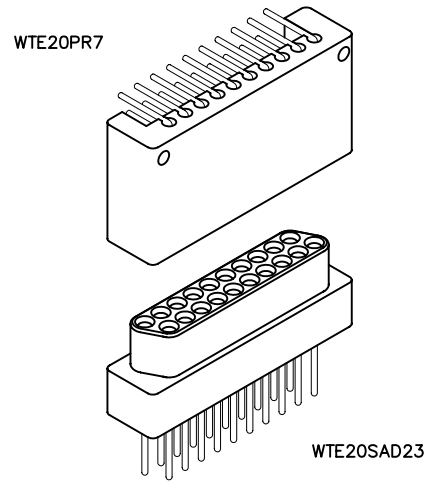

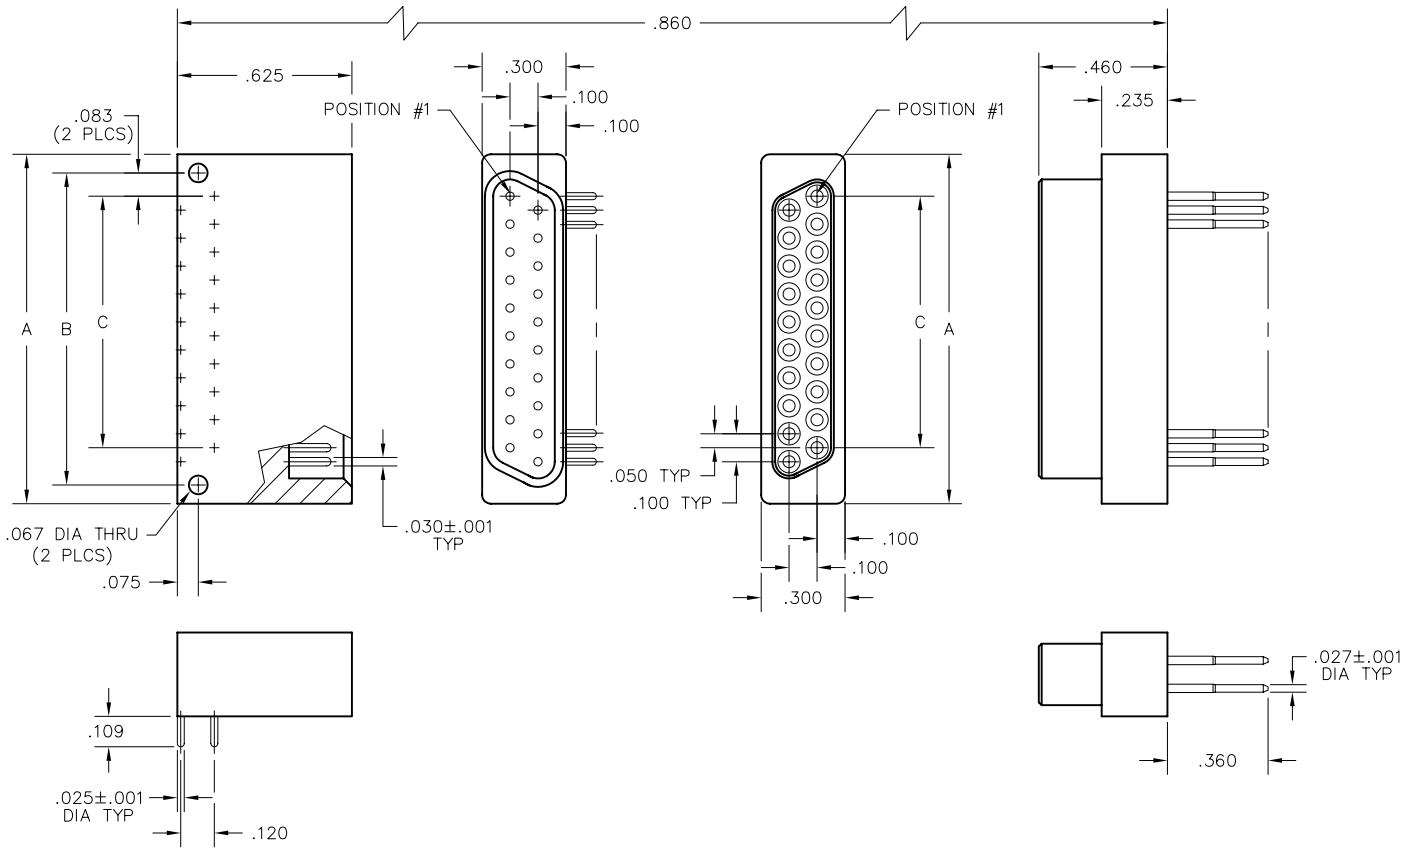

PLUG RECEPTACLE


DIMENSIONS			
SIZE	A	B	C
10	.750	.616	.400
20	1.250	1.116	.900

PLUG: WTE 20 PR7
RECEPTACLE: WTE 20 SAD23
XXX XX XXXXX

PLUG		RECEPTACLE	
SERIES			
WTE	Plug, right angle (male pins, female shell)	WTE WTE	Receptacle, straight (female pins, male shell) Receptacle, right angle (female pins, male shell)
SIZE			
XX	Number of contacts (10 or 20)	XX	Number of contacts (10 or 20)
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR5	Pin, right angle, dip solder, .081"	SAD9	Socket, straight, dip solder, .140"
PR7	Pin, right angle, dip solder, .109"	SAD23	Socket, straight, dip solder, .360"
		SAR13	Socket, right angle, dip solder, .203"

OPTIONS

- Cannot pre-tin these connectors.
- Insulator: glass filled nylon per ASTM-D4066.
- Not recommended for use with lead free solder process.

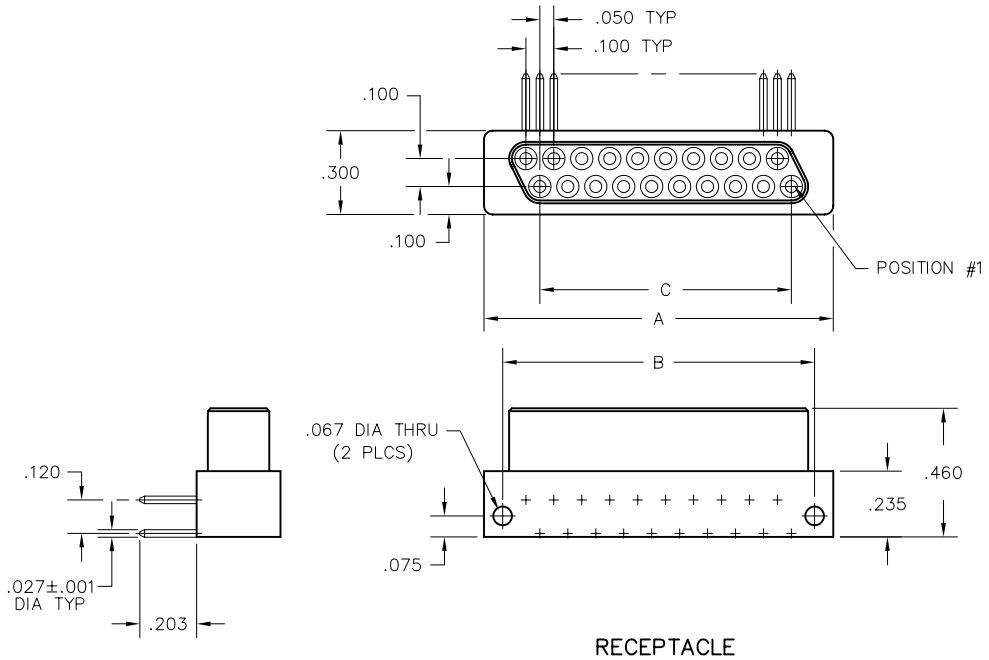

RECEPTACLE
EXAMPLE: WTE20SAR13

DIMENSIONS			
SIZE	A	B	C
10	.750	.616	.400
20	1.250	1.116	.900


MISC CONNECTORS


Stackable Board to Board

.100"

WE

111 Contacts

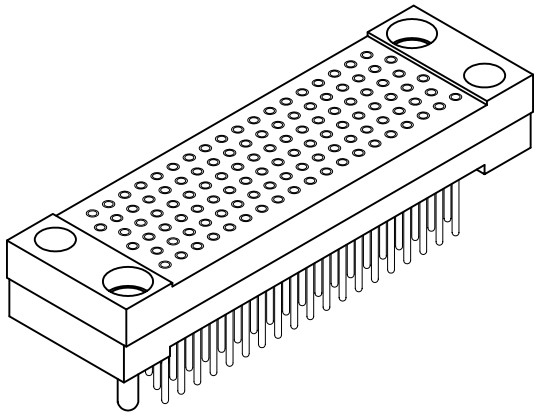

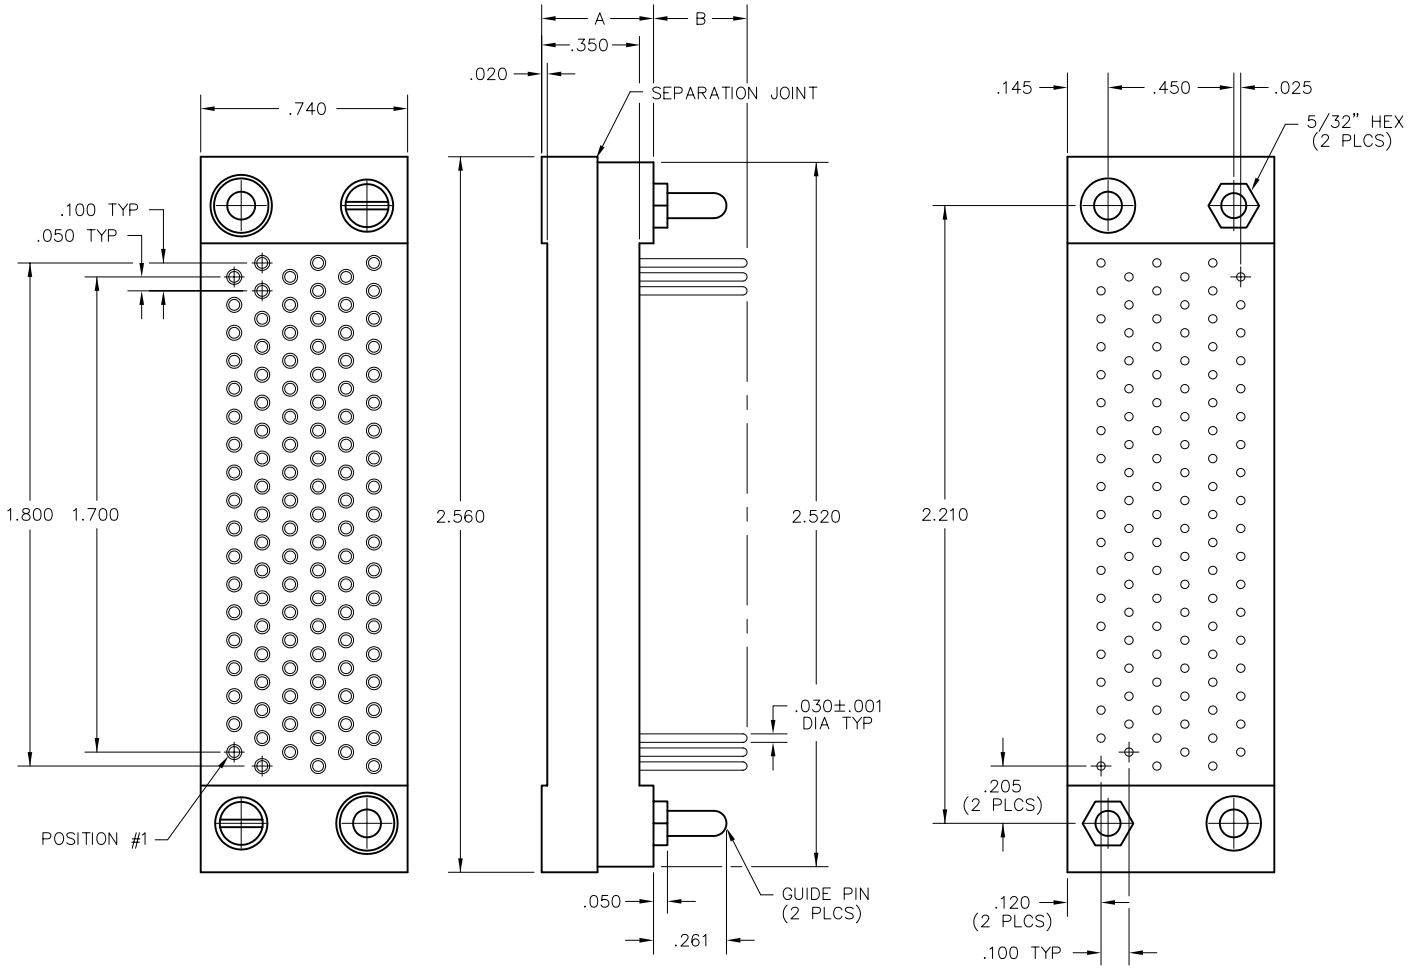

DIMENSIONS			
STYLE	A	B±.015	TYPE
WEA	.400	.335	STACKABLE
WEB	.450	.130	MOTHER BOARD
WEB	.450	.335	STACKABLE
WEC	.495	.335	STACKABLE

WEA	111	111A	SP21	GB
XXX	XXX	XXXX	XXXX	XX

SERIES

WEA	Molding height .400"
WEB	Molding height .450"
WEC	Molding height .495"

SIZE

111	Number of positions

LOADING


111A	Fully loaded

CONTACTS

	TYPE CONTACTS/TERMINATIONS:
SP21	Socket, stackable, .335" termination length
SP9	Socket, dip solder, .130" termination length

HARDWARE

GA	Guide set, motherboard
GB	Guide set, stackable

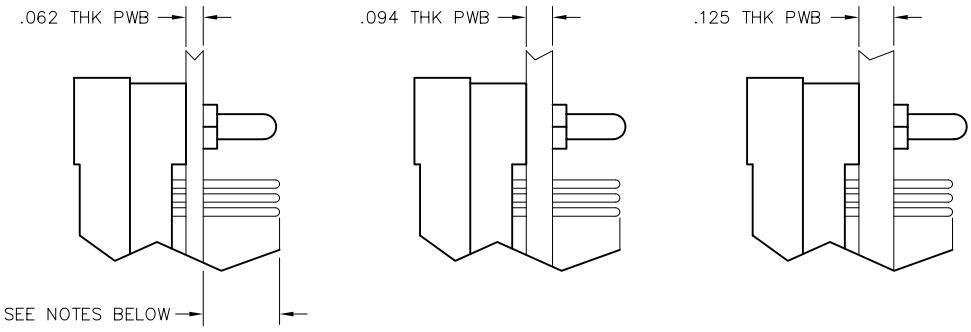

Notes:

Dimensions "A" & "B" represent current configurations. Board thickness information is for reference only. Contacts are individually replaced by removing the guide pins and screws. Molding halves will separate at the designated joint.

For Stackable Applications:
Minimum contact termination length to be .190" beyond PWB for minimum recommended mating in this series. Maximum contact termination length to be .250" beyond PWB.

For Mother Board Applications:
Termination lengths typically extend .047" beyond PWB (example: a .062" board would typically require a .109" termination length, dimension "B").


MISC CONNECTORS


Stackable Board to Board

.100"

WE

135 Contacts

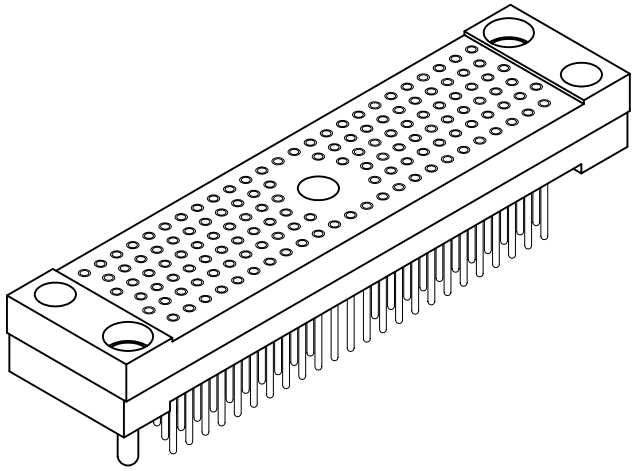

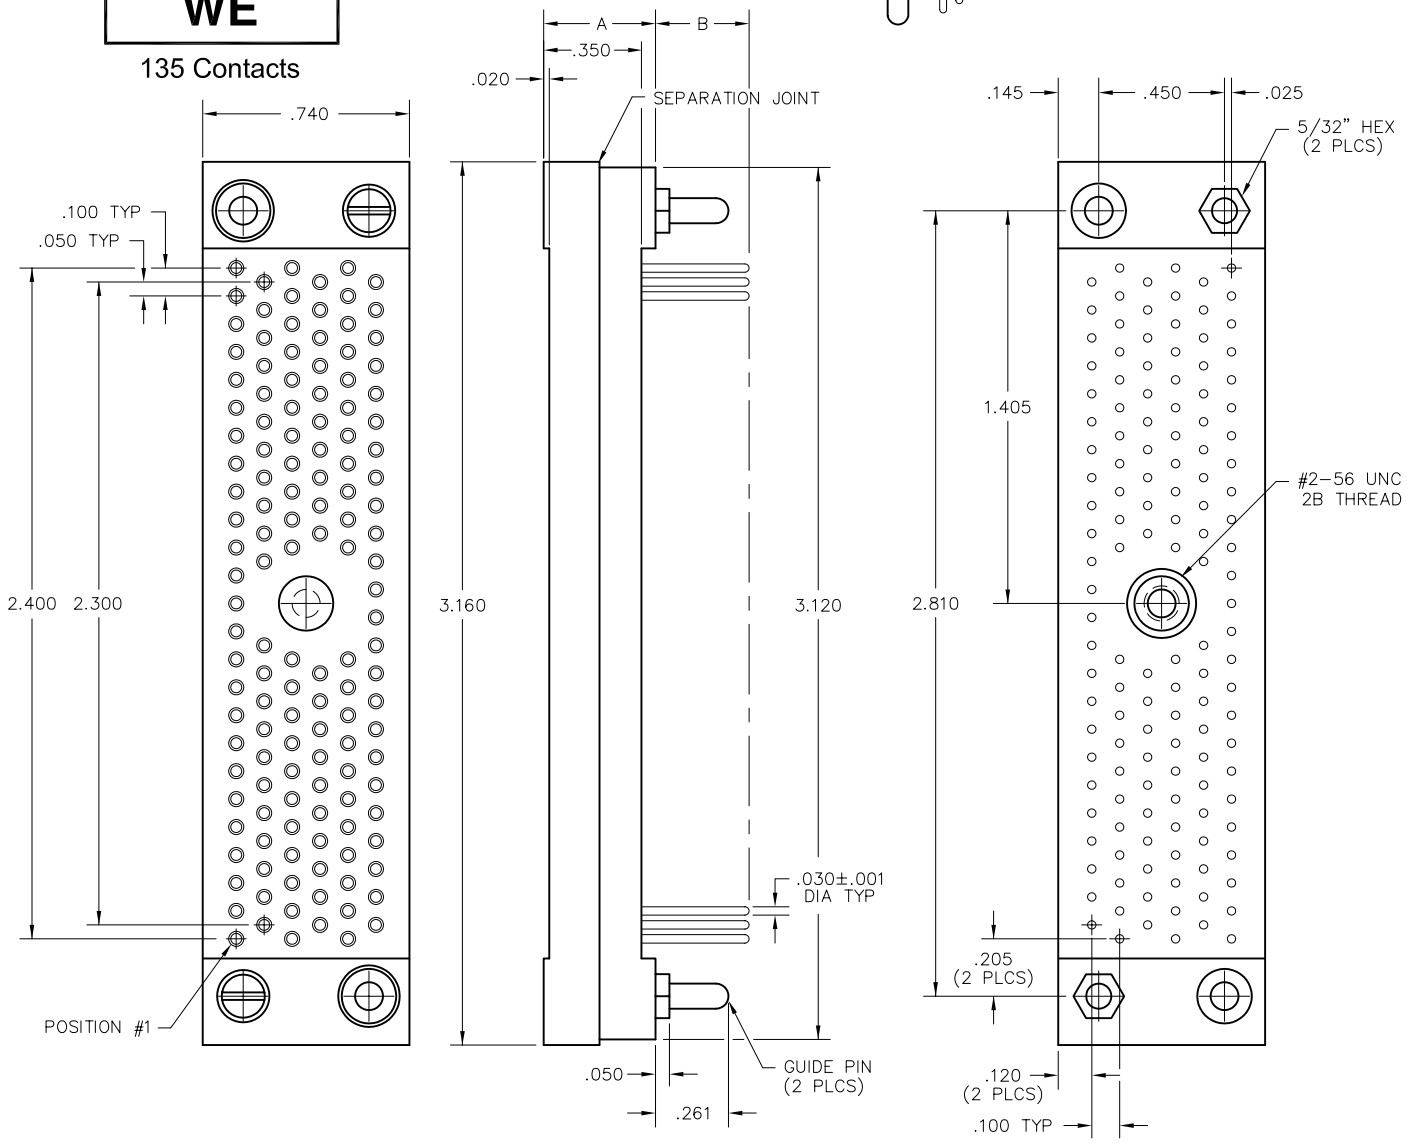

DIMENSIONS			
STYLE	A	B±.015	TYPE
WEA	.465	.335	STACKABLE
WEA	.465	.130	MOTHER BOARD
WEB	.500	.335	STACKABLE
WEB	.500	.130	MOTHER BOARD
WEC	.740	.335	STACKABLE
WEC	.740	.130	MOTHER BOARD

WEA 135 135A SP21 GB
XXX XXX XXXX XXXX XX

SERIES

WEA	Molding height .465"
WEB	Molding height .500"
WEC	Molding height .740"

SIZE

135	Number of positions

LOADING


135A	Fully loaded

CONTACTS

	TYPE CONTACTS/TERMINATIONS:
SP21	Socket, stackable, .335" termination length
SP9	Socket, dip solder, .130" termination length

HARDWARE

GA	Guide set, motherboard
GB	Guide set, stackable

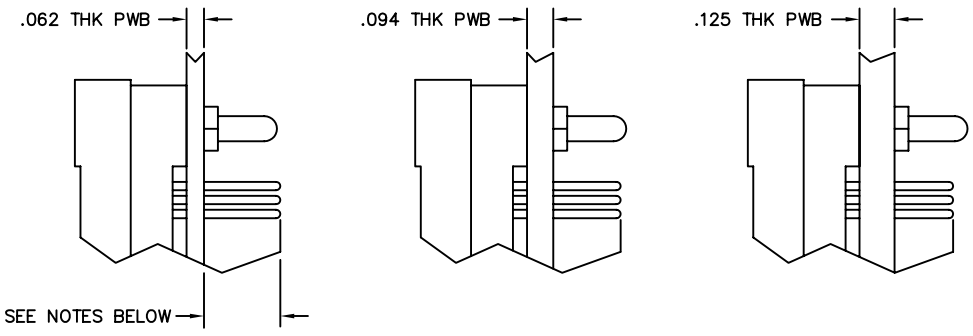

Notes:

Dimensions "A" & "B" represent current configurations. Board thickness information is for reference only. Contacts are individually replaced by removing the guide pins and screws. Molding halves will separate at the designated joint.

For Stackable Applications:
Minimum contact termination length to be .190" beyond PWB for minimum recommended mating in this series. Maximum contact termination length to be .250" beyond PWB.

For Mother Board Applications:
Termination lengths typically extend .047" beyond PWB (example: a .062" board would typically require a .109" termination length, dimension "B").

"W" SERIES ACCESSORIES


Contents

"W" Series
Hardware, Contacts and Accessories

	Accessories
WA-2	Floating Mounts
WA-4	Face Seal Gaskets for WTA-WTB Series
WA-5	Face Seal Gaskets for WG-WGA-WGE Series
WA-6	Hoods for WTA, WTAX Series
WA-7	Hoods for WTD, WTDX Series
WA-8	Adapter Sleeve, Coax Removal Tool, Extension Nuts
WA-9	Nut Spanner Wrench, Crimp & Removal Tools
	Contacts
WA-10	#22 Pin Contacts, #22 Socket Contacts
WA-11	Crimp Removable Contacts, Coax Contacts
	Hardware
WA-12	Fixed Jacksets, Turning Jacksets
WA-14	Guide Sets
WA-15	Hardware Availability Chart
WA-17	Polarization - "D" Shaped Guide Sets
WA-18	Polarizing Pin Application
	Military Cross Reference
WA-19	Military Cross Reference Chart

Accessories

Floating Mounts for
WTB-WTK Receptacles

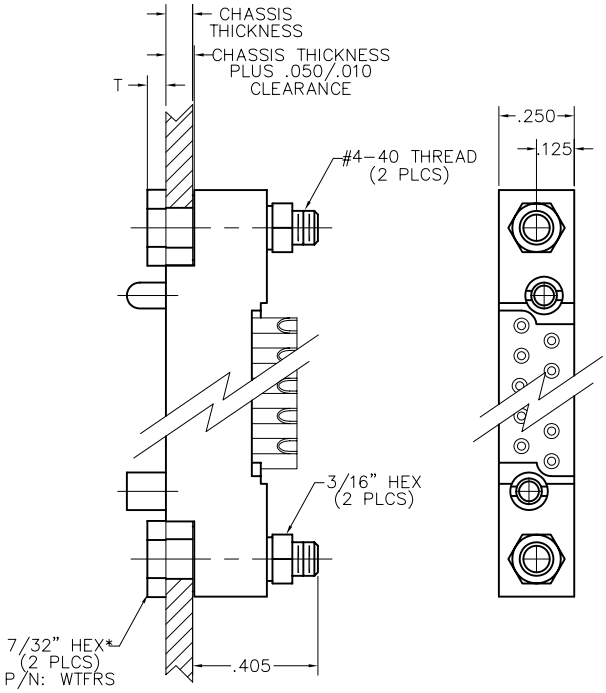


FLOATING MOUNT
REAR

DIMENSIONS			
CHASSIS THICKNESS	MOUNTING SCREW HEX HEAD	MOUNTING SCREW ROUND HEAD	T
.062	WTFRS062	WTFRAS062	.062
.093	WTFRS093	WTFRAS093	.062
.125	WTFRS125	WTFRAS125	.050

CONNECTOR SIZES 10–70 REQUIRE 2 WTFRS SCREW ASSEMBLIES.

CONNECTOR SIZES OVER 70 REQUIRE 2 WTFRS ASSEMBLIES AND ONE WTFRA SCREW ASSEMBLY.

* – 7/32 DIA ROUND HEAD – WTFRAS CENTER POSITION ON SIZES OVER 70

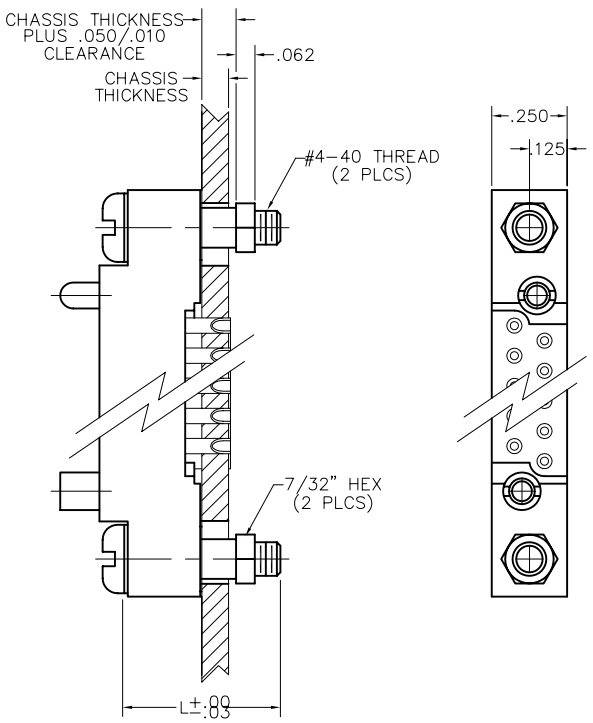


FLOATING MOUNT
FRONT

DIMENSIONS			
CHASSIS THICKNESS	BUSHING	QTY. REQ. FOR SIZES 10–70	L
.062	WTFFS062	2	.50
.093	WTFFS093		.50
.125	WTFFS125		.56


DIMENSIONS					
SIZE	A +.006 −.000	B ±.003	SIZE	A +.006 −.000	B ±.003
10	.882	1.100	44	2.582	2.800
14	1.082	1.300	50	2.882	3.100
20	1.382	1.600	54	3.082	3.300
24	1.582	1.800	56	3.182	3.400
26	1.682	1.900	60	3.382	3.600
30	1.882	2.100	66	3.682	3.900
36	2.182	2.400	70	3.882	4.100
40	2.382	2.600			


CHASSIS CUTOUT
WTB-WTK, SIZES 10-70

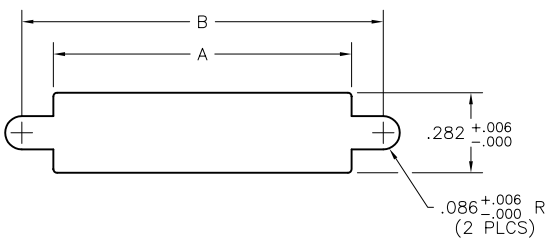


Accessories


Floating Mounts for
WTB-WTK Receptacles

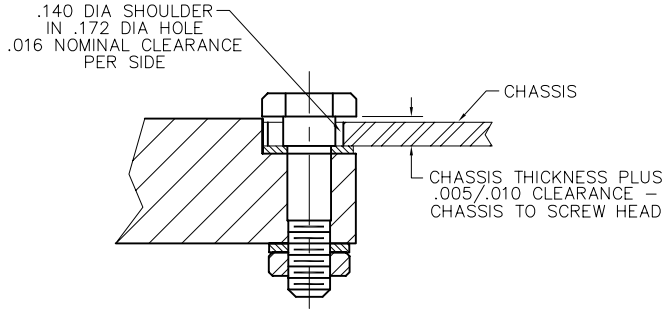

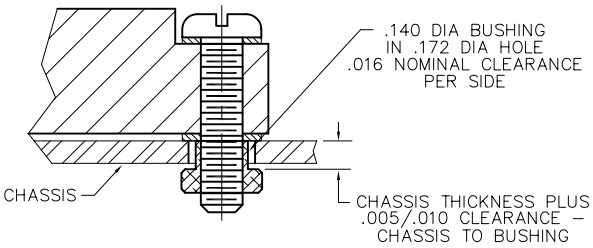

FLOATING STUD,
HEX HEAD
7/32±.005 HEX HEAD

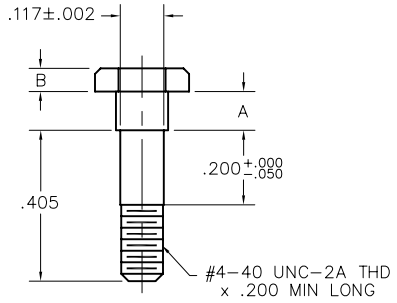

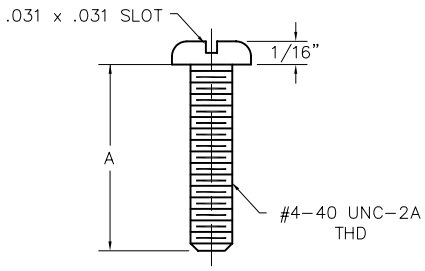



FLOATING STUD,
ROUND HEAD
.212±.007 DIA HEAD

FLAT WASHER
.215 O.D. x .120 I.D.

SPLIT LOCKWASHER
.212±.015 O.D. x .115 I.D.

HEX NUT
3/16±.005

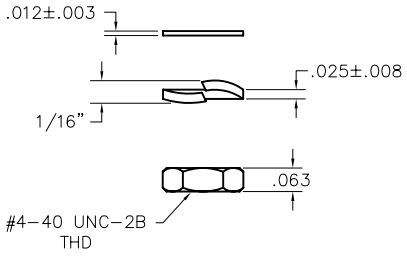

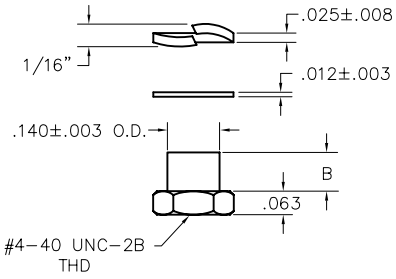

SPLIT LOCKWASHER
.212±.015 O.D. x .115 I.D.

FLAT WASHER
.215 O.D. x .120 I.D.

FLOATING BUSHING
7/32" HEX


PART NUMBER	A +.000 −.005	B +.000 −.005	CHASSIS THICKNESS
WTFRS062	.073	.062	.062
WTFRS093	.104	.062	.093
WTFRS125	.135	.050	.125


PART NUMBER	A +.000 −.030	B±.003	CHASSIS THICKNESS
WTFFS040	.439	.051	.040
WTFFS062	.500	.073	.062
WTFFS093	.500	.104	.093
WTFFS125	.562	.135	.125
WTFFS200	.625	.210	.200

PART DESCRIPTION	MATERIAL SPECIFICATION	FINISH SPECIFICATION	WTFRS	WTFRAS	WTFFS
FLOATING STUD 7/32" DIA, ROUND HEAD	SST SERIES 300 PER ASTM–A582 AND/OR QQ–S–763/766	PASSIVATE PER SAE AMS–QQ–P–35 OR ASTM–A967		X	
FLOATING STUD 7/32" HEX HEAD			X		
FLOATING BUSHING 7/32" HEX HEAD					X
MOUNTING SCREW 7/32" DIA, ROUND HEAD					X
#4 LOCKWASHER			X	X	X
#4 FLAT WASHER			X	X	X
HEX NUT #4–40			X	X	

Accessories

Face Seal Gaskets for WTA-WTB Series

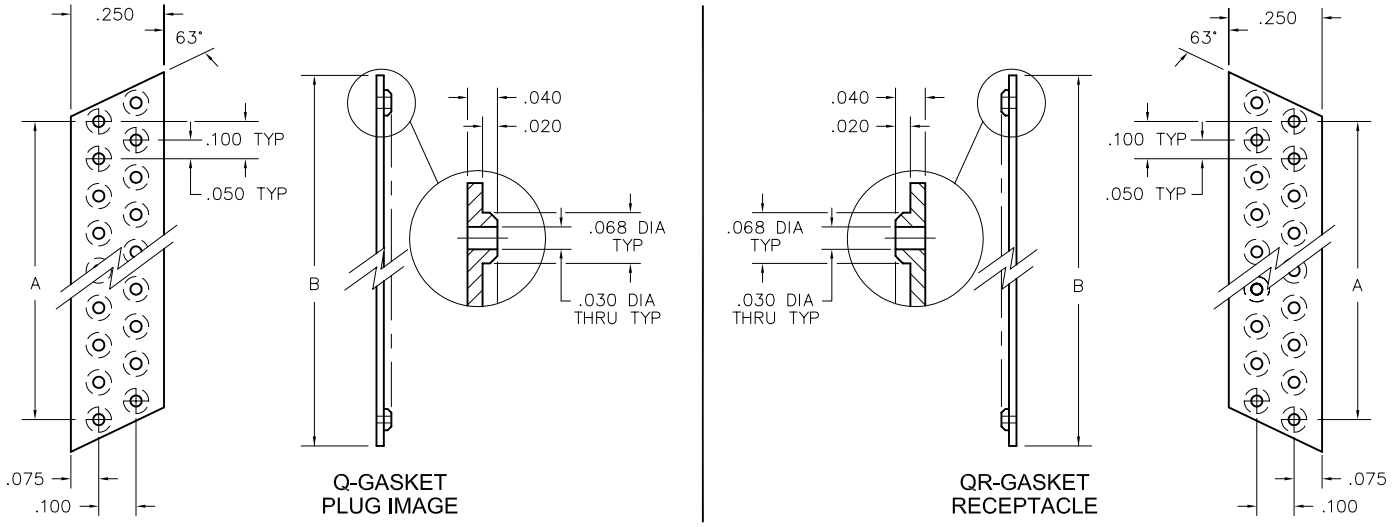

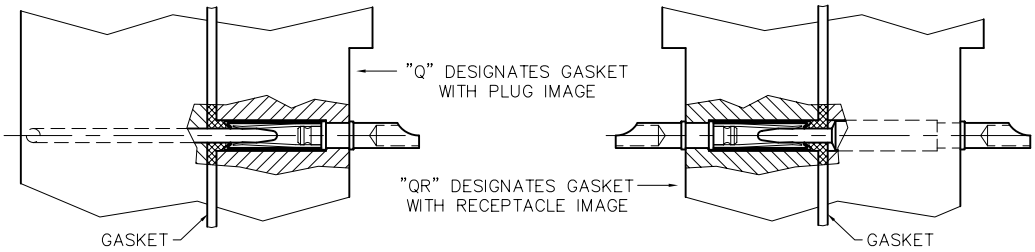

WTB26PR7QSY WTB26SECSY WTA26SECJT WTA26PCQRJL

FOR CONNECTOR CODE	USE TWO GASKETS CODE NUMBER
WTB90PR	WTB45Q
WTB100PR	WTB50Q
WTB120PR	WTB60Q

NOTES:
1. DUE TO THE ELASTICITY OF SILICONE RUBBER, A & B DIMENSIONS ARE FOR REFERENCE ONLY. THE ACCUMULATIVE TOLERANCE FOR LINEAR HOLE CENTERS SHALL BE NO MORE THAN ±.030 FOR EACH INCH OF SPACE BETWEEN END HOLES.
2. MATERIAL: SILICONE RUBBER, CLASS 2A OR 2B, GRADE 50 PER A-A-59588.
3. FOR USE WITH MALE (PIN) CONNECTORS ONLY.
4. CHECK SALES DEPARTMENT FOR COMBINATION CONNECTOR AND GASKET CODES. EXAMPLE: WTB26PR7QSY-1.

CODE CHART

NO. OF CONTACTS	A	B	GASKET CODE (PLUG IMAGE)	FOR USE WITH	GASKET CODE (RCPT IMAGE)	FOR USE WITH
10	.400	.625	WTB10Q	WTA-P-JT JTA JTL WTAV-P-SY SYL WTB-PR-SY WTBV-P-SY	WTB10QR	WTA-P-J JL WTAX-P-SY SYL
14	.600	.825	WTB14Q		WTB14QR	
20	.900	1.125	WTB20Q		WTB20QR	
24	1.100	1.325	WTB24Q		WTB24QR	
26	1.200	1.425	WTB26Q		WTB26QR	
30	1.400	1.625	WTB30Q		WTB30QR	
36	1.700	1.925	WTB36Q		WTB36QR	
40	1.900	2.125	WTB40Q		WTB40QR	
44	2.100	2.325	WTB44Q		WTB44QR	
50	2.400	2.625	WTB50Q		WTB50QR	
54	2.600	2.825	WTB54Q		WTB54QR	
56	2.700	2.925	WTB56Q		WTB56QR	
60	2.900	3.125	WTB60Q		WTB60QR	
66	3.200	3.425	WTB66Q		WTB66QR	
70	3.400	3.625	WTB70Q		————	

Ask About AirBorn's Accelerated Delivery Service

Accessories

Face Seal Gaskets for
WG-WGA-WGE Series

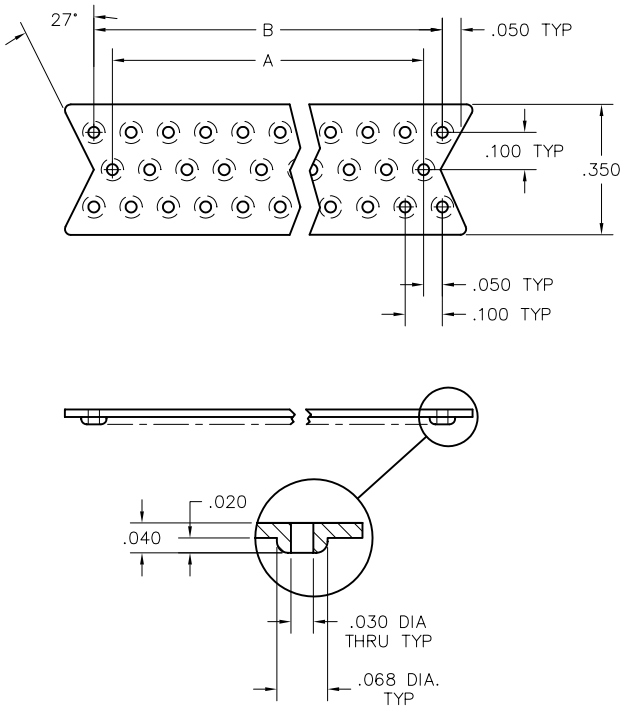


FIGURE 1

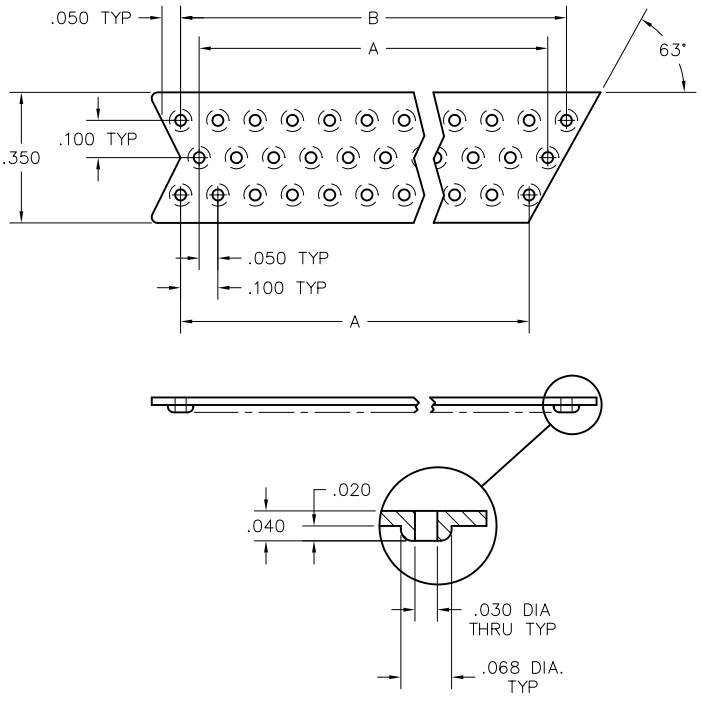


FIGURE 2

NOTES:
1. DUE TO THE ELASTICITY OF SILICONE RUBBER, A & B DIMENSIONS ARE FOR REFERENCE ONLY. THE ACCUMULATIVE TOLERANCE FOR LINEAR HOLE CENTERS SHALL BE NO MORE THAN ±.030 FOR EACH INCH OF SPACE BETWEEN END HOLES.
2. MATERIAL: SILICONE RUBBER, CLASS 2A OR 2B, GRADE 50 PER A-A-59588.
3. FOR USE WITH MALE (PIN) CONNECTORS ONLY.
4. CHECK SALES DEPARTMENT FOR COMBINATION CONNECTOR AND GASKET CODES. EXAMPLE: WG80PR7QSY-1.


CODE CHART					
NO. OF CONTACTS	A	B	FIGURE	GASKET CODE	FOR USE WITH
50	1.500	1.600	1	WG50Q	WG-P-JT JTA JTL WGV-P-SY SYL WG-PR-SY
80	2.500	2.600	1	WG80Q	
92	2.900	3.000	1	WG92Q	
61	1.900	2.000	2	WG61Q	
52	1.600	1.700	2	WG52Q	
62	1.900	2.000	1	WG62Q	
70	2.200	2.300	1	WG70Q	

FOR CONNECTOR CODE	USE TWO GASKETS CODE NUMBER
WGA122PR	WG61Q
WG104PR	WG52Q
WG160PR	WG80Q


Accessories

Hoods for
WTA-WTAX Series


WTA HOODS
FOR USE WITH PLUG PATTERN

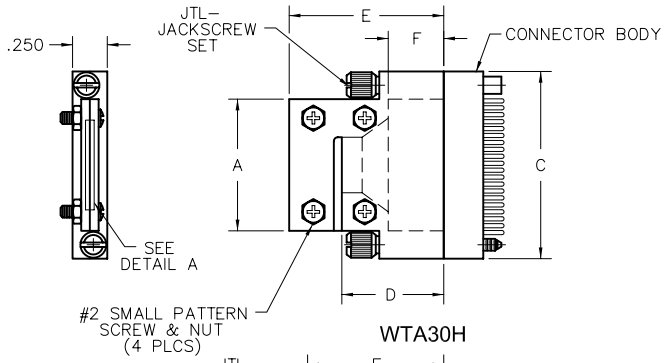

WTA30H

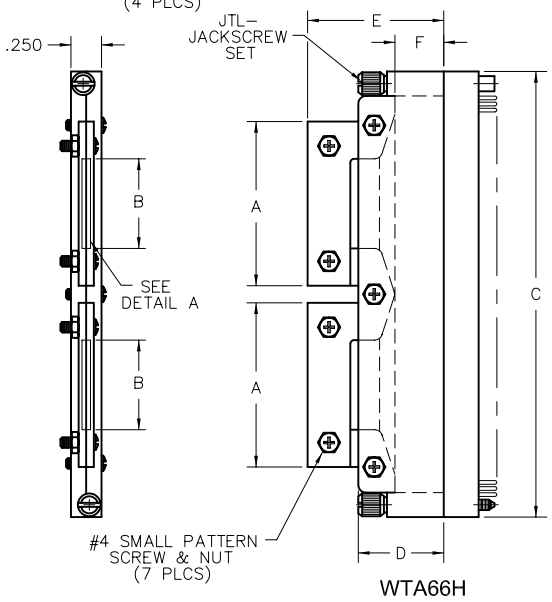


WTA66H




DETAIL A
MAXIMUM CABLE
OPENING
SEE NOTE 4

WTAX HOODS
FOR USE WITH RECEPTACLE PATTERN

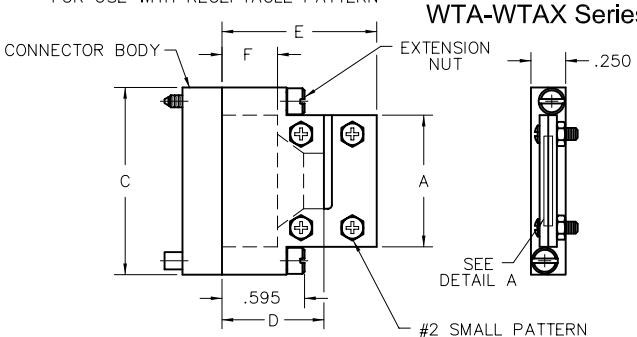

WTAX30HN

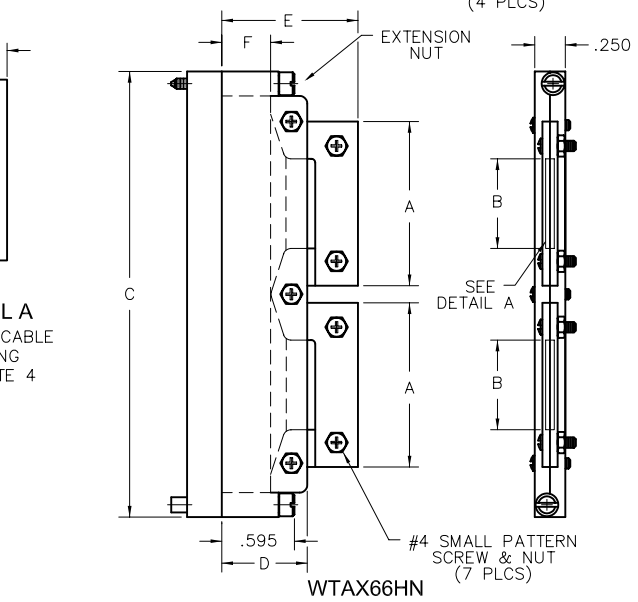

WTAX66HN

CODE CHART

WTA HOODS, PLUG IMAGE							WTAX HOODS, RECEPTACLE IMAGE							PART NO. DESIGNATION			
PART NO.	A	B ±.015 −.025	C	D	E	F	PART NO.	A	B ±.015 −.025	C	D	E	F	SERIES	SIZE	HOOD DESIGNATION	FOR HARDWARE TYPE
WTA20H	.950	.400	1.350				———	———	———	———							
WTA30H	1.450	.800	1.850				WTAX30H	1.450	.800	1.850							
WTA36H	1.300	.750	2.150				WTAX36H	1.300	.750	2.150							
WTA40H	1.500	.950	2.350				WTAX40H	1.500	.950	2.350				WTA	20 THRU 70	H	JTL – LONG TURNING JACKSCREW SET
WTA44H	1.700	1.150	2.550				WTAX44H	1.700	1.150	2.550							
WTA50H	2.000	1.450	2.850	.700	1.115	.400	WTAX50H	2.000	1.450	2.850	.700	1.115	.400				
WTA54H	2.200	1.650	3.050				WTAX54H	1.950	1.400	3.050							
WTA56H	2.060	1.500	3.150				WTAX56H	2.060	1.500	3.150							
WTA60H	1.240	.700	3.350				WTAX60H	1.240	.700	3.350				WTAX	30 THRU 70	HN	J – FIXED JACKSCREW SET SY – GUIDE SET
WTA66H	1.350	.735	3.650				WTAX66H	1.345	.735	3.650							
WTA70H	1.445	.885	3.850				WTAX70H	1.445	.885	3.850							

NOTES:
1. DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINE.
2. HOODS ARE SUPPLIED UNASSEMBLED.
3. HOOD MATERIAL: POLYETHYLENE, HIGH DENSITY CLAMPING SCREWS AND NUTS: STAINLESS STEEL
4. THE TOP CLAMPS ARE FLEXIBLE TO ACCOMMODATE MAXIMUM CABLE BUNDLE.
5. CHECK WITH SALES DEPARTMENT FOR SIZES NOT LISTED.
6. SCREWS SUPPLIED ARE CROSS–RECESS ONLY.
7. TOLERANCES: ±.015
8. SIZES 20–30 USE #2 SMALL PATTERN SCREW & NUT.
   SIZES 36–70 USE #4 SMALL PATTERN SCREW & NUT.
9. HOODS CANNOT BE USED ON CONNECTORS SPECIFYING THE –C45 OPTION CODE.

EXAMPLES:
WTA**H = DESIGNATES HOOD USED WITH JTL HARDWARE
WTA**HN = DESIGNATES HOOD USED WITH J OR SY HARDWARE (INCLUDES EXTENSION NUTS).
WTAHN = DESIGNATES EXTENSION NUTS ONLY.

** = DESIGNATES CONNECTOR SIZE. SEE PAGE WA–7 FOR ADDITIONAL INFORMATION ON EXTENSION NUTS.


Ask About AirBorn's Accelerated Delivery Service

Accessories


Hoods for
WTD-WTDX Series

WTD HOODS

FOR USE WITH PLUG PATTERN

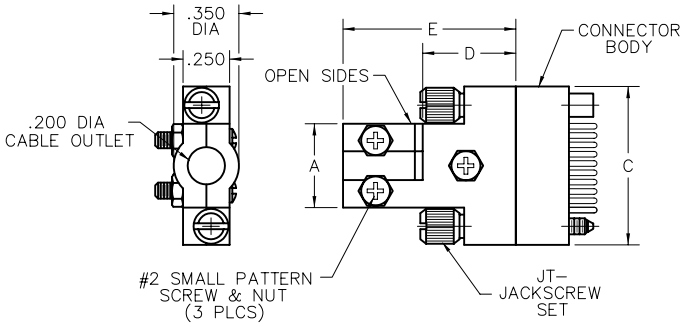


WTD10H

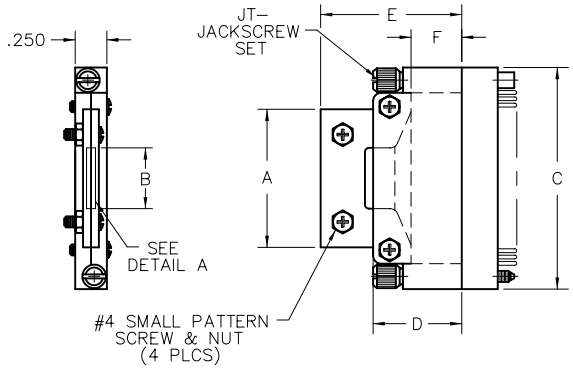


WTD26H

WTDX HOODS

FOR USE WITH RECEPTACLE PATTERN

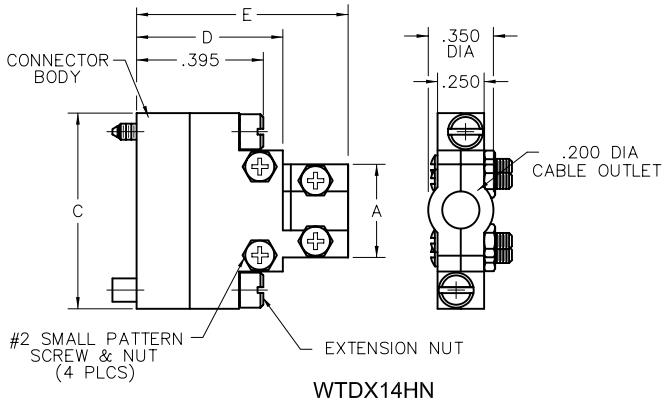

WTDX14HN



DETAIL A
MAXIMUM CABLE
OPENING
SEE NOTE 4

PART NO. DESIGNATION			
SERIES	SIZE	HOOD DESIGNATION	FOR HARDWARE TYPE
WTD	10, 14 & 26	H	JT – TURNING JACKSCREW SET
WTDX		HN	J – FIXED JACKSCREW SET SY – GUIDE SET

CODE CHART													
WTD HOODS, PLUG IMAGE							WTDX HOODS, RECEPTACLE IMAGE						
PART NO.	A	B +.015 −.025	C	D	E	F	PART NO.	A	B +.015 −.025	C	D	E	F
WTD10H	.450	——	.850	.500	.850	.200	WTDX10H	.450	——	.850	.500	.850	——
WTD14H	.500	——	1.050				WTDX14H	.500	——	1.050			——
WTD26H	1.090	.540	1.650		.915		WTDX26H	1.250	.600	1.650		.915	.200


NOTES:

1. DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINE.
2. HOODS ARE SUPPLIED UNASSEMBLED.
3. HOOD MATERIAL: POLYETHYLENE, HIGH DENSITY
   CLAMPING SCREWS AND NUTS: STAINLESS STEEL
4. THE TOP CLAMPS ARE FLEXIBLE TO ACCOMMODATE MAXIMUM CABLE BUNDLE.
5. CHECK WITH SALES DEPARTMENT FOR SIZES NOT LISTED.
6. SEE PAGE WA–5 FOR WTA–WTAX SERIES HOODS.
7. IF USED WITH WTA OR WTAX CONNECTORS IS DESIRED, LEAD DRESS AREA WILL BE AT A MINIMUM.
8. SCREWS SUPPLIED ARE CROSS–RECESS ONLY.
9. TOLERANCES: ±.015
10. SIZES 10 & 14 USE #2 SMALL PATTERN SCREW & NUT.
    SIZE 26 USE #4 SMALL PATTERN SCREW & NUT.
11. HOODS CANNOT BE USED ON CONNECTORS SPECIFYING THE –C45 OPTION CODE.


EXAMPLES:

WTD**H = DESIGNATES HOOD USED WITH JT HARDWARE
WTD**HN = DESIGNATES HOOD USED WITH J OR SY HARDWARE (INCLUDES EXTENSION NUTS).
WTDHN = DESIGNATES EXTENSION NUTS ONLY.

** = DESIGNATES CONNECTOR SIZE. SEE PAGE WA–7 FOR ADDITIONAL INFORMATION ON EXTENSION NUTS.

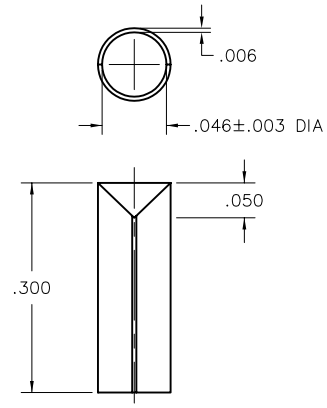

CD1312
CONTACT ADAPTER SLEEVE

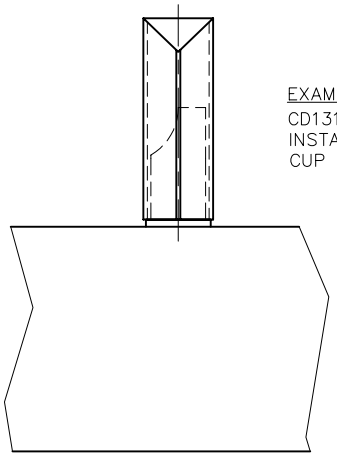

EXAMPLE:
CD1312 ADAPTER SLEEVE
INSTALLED OVER SOLDER
CUP CONTACT


Accessories

Adapter Sleeve for
Solder Cup Contacts

NOTES:
1. MATERIAL: BeCu PER ASTM-B194.
   FINISH: GOLD PLATE PER MIL-G-45204
2. CONTACT ADAPTER SLEEVE IS DESIGNED TO ACCEPT #20 WIRE.
3. WITH USE OF THE ADAPTER SLEEVE, EFFECTIVE DIAMETER IS EXPANDED TO .050 I.D.
4. THE CD1312 WILL ALSO ACCEPT: 3 TWISTED OF #28 WIRE
   2 TWISTED OF #26 WIRE

Accessories


Coax Removal Tool
for WTC Contacts

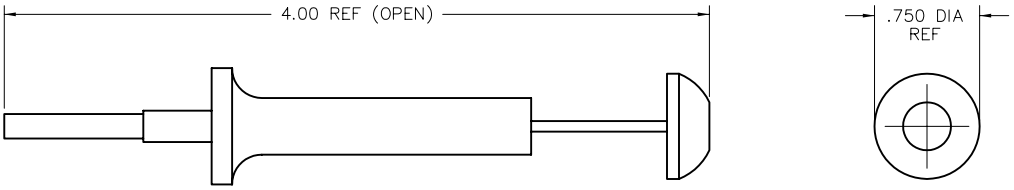


TR2679
REMOVAL TOOL

Accessories

Extension Nuts

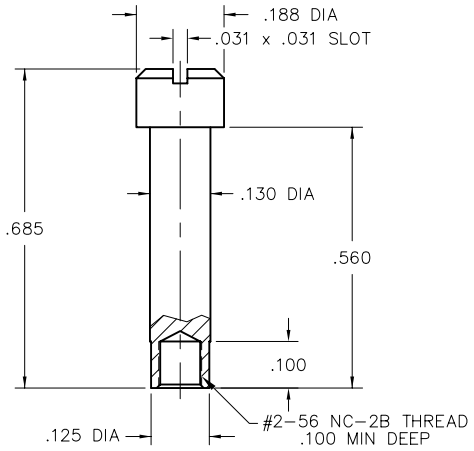

WTAHN
FOR USE WITH WTAH & WTAXH
HOODS. SEE PAGE WA-5.

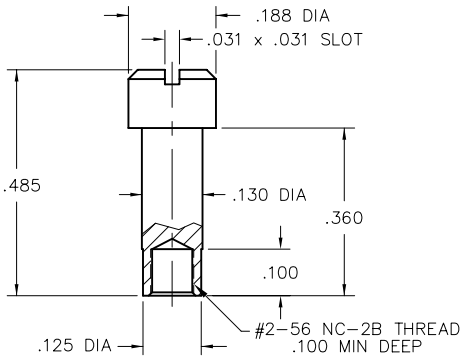


WTDHN
FOR USE WITH WTDH & WTDXH
HOODS. SEE PAGE WA-6.


NOTES:
1. EXTENSION NUTS ARE NECESSARY FOR HOODS WHEN CONNECTOR INVOLVED HAS FIXED HARDWARE.
   FOR EXAMPLE: GUIDE SET (SY) OR FIXED JACKSCREW SET (J).
2. TWO EXTENSION NUTS ARE REQUIRED PER HOOD.
3. MATERIAL: STAINLESS STEEL, TYPE 303.
4. INSTALLATION: REMOVE NUT FROM HARDWARE ON TERMINATION SIDE OF CONNECTOR USING TN1680, NUT SPANNER WRENCH. INSTALL EXTENSION NUT IN ITS PLACE. FOR INFORMATION ON TN1680 SEE WA-8.

Accessories

Nut Spanner Wrenchs

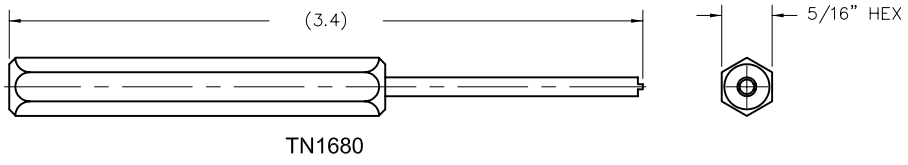

TN1680

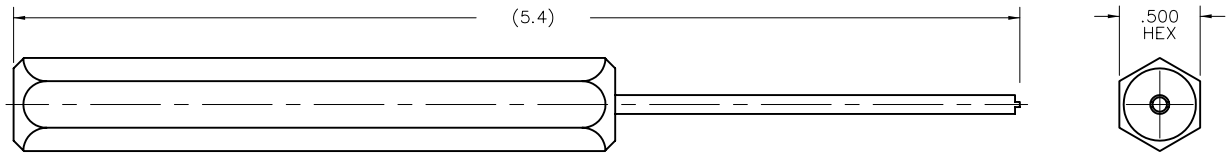


TN4612

USING EITHER OF THE SPANNER WRENCHES SHOWN ABOVE, GUIDE SETS MAY BE REMOVED AND REPOSITIONED IN ANY OF THE 64 POLARIZING POSITIONS. REFER TO PAGE WA–18 FOR POLARIZATION CHART.

CAUTION: WHEN POLARIZED POSITIONS ARE CHANGED, APPLY LOCTITE 242® TO THREADS.

IF SPANNER NUTS ARE DIFFICULT TO REMOVE DUE TO HARDENED LOCTITE®, APPLY HEAT (300° F) TO NUT AREA FOR ONE HOUR AND REPEAT REMOVAL OPERATION.




TN21243


THE 1/4" DRIVE SPANNER WRENCH ABOVE IS DESIGNED FOR USE IN TORQUE WRENCHES

Accessories

Insertion & Removal Tools

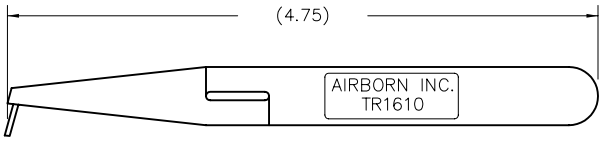

TR1610

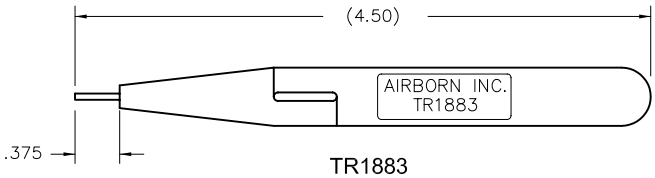



TR1883

Accessories

Crimp Tools & Positioners


TC2963 - CRIMP TOOL
REF M22520/2–01
TP1696 - POSITIONER
REF M22520/2–06
(REF ASTRO TOOL CORP.)

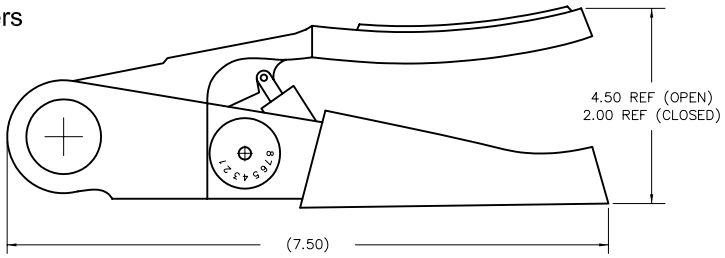



INSULATION STRIPPING
EXPOSE .135/.145 BARE WIRE LENGTH FOR INSERTION INTO CONTACT.

TC1652 - CRIMP TOOL
REF M22520/2–01
TP1653 - POSITIONER
REF M22520/2–06
(REF DANIELS MFG. CORP.)

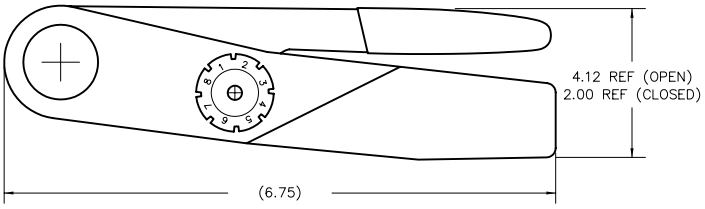


TOOL SELECTION TABLE		
CONTACT	TOOL NO.	POSITIONER
WTK2222PA	TC1652 OR TC2963	TP1985
WTK2222S		TP1653 OR TP1696
WTK2220S657		TP2435


Contacts

#22 Pins & Sockets
for WT, WTA, WTB, WTK,
WG & WGA Series


PINS




PC PC Pin, straight, solder cup




PD
PD9 Pin, straight, dip solder, .140"
PD11 Pin, straight, dip solder, .172"




PF
PF3 Pin, straight, flex circuit, .050"
PF6 Pin, straight, flex circuit, .093"



PW PW40 Pin, straight, wire wrap®, .625"




PR
PR5 Pin, right angle, dip solder, .081" x .025" dia
PR7 Pin, right angle, dip solder, .109" x .025" dia
PR9 Pin, right angle, dip solder, .140" x .025" dia
PR11 Pin, right angle, dip solder, .172" x .025" dia
PR15 Pin, right angle, dip solder, .234" x .025" dia
PRD4 Pin, right angle, dip solder, .063" x .030" dia
PRD7 Pin, right angle, dip solder, .109" x .030" dia
PRD8 Pin, right angle, dip solder, .125" x .030" dia




PRW
PRW32 Pin, right angle, wire wrap®, .500"
PRW34 Pin, right angle, wire wrap®, .531"
PRW40 Pin, right angle, wire wrap®, .625"


SOCKETS




SAC SAC Socket, straight, solder cup, closed entry




SAD
SAD7 Socket, straight, dip solder, .109"
SAD9 Socket, straight, dip solder, .140"
SAD11 Socket, straight, dip solder, .172"
SAD15 Socket, straight, dip solder, .234"
SAD16 Socket, straight, dip solder, .250"




SAF
SAF3 Socket, straight, flex circuit, .050"
SAF6 Socket, straight, flex circuit, .093"



SAG
SAG7 Socket, straight, dip solder, .109"
SAG9 Socket, straight, dip solder, .140"
SAG11 Socket, straight, dip solder, .172"




SAR
SAR7 Socket, right angle, dip solder, .109"
SAR9 Socket, right angle, dip solder, .140"
SAR11 Socket, right angle, dip solder, .172"



SAW
SAW24 Socket, straight, wire wrap®, .375"
SAW40 Socket, straight, wire wrap®, .625"


Contacts

Crimp Removable for
WTDX, WTDXA, WTK, WTKA Series
WGDX, WGDXA, WGK, WGKA Series

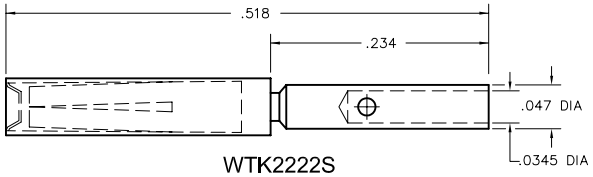


WTK2222S
SOCKET, CRIMP REMOVABLE

WTK2222SA
SOCKET, LOW FORCE, CRIMP REMOVABLE,
22 GAGE BARREL

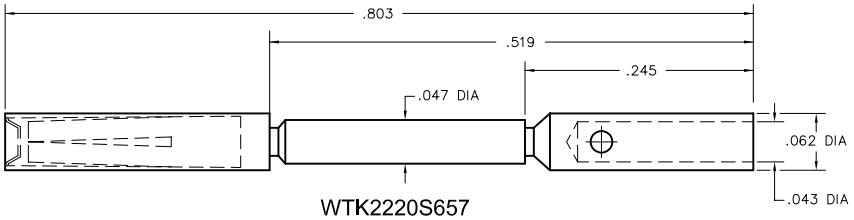

WTK2220S657
SOCKET, CRIMP REMOVABLE,
20 GAGE BARREL

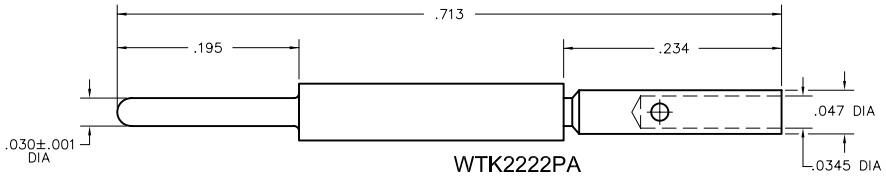


WTK2222PA
PIN, CRIMP REMOVABLE,
22 GAGE BARREL


Note: When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

Contacts

Coax

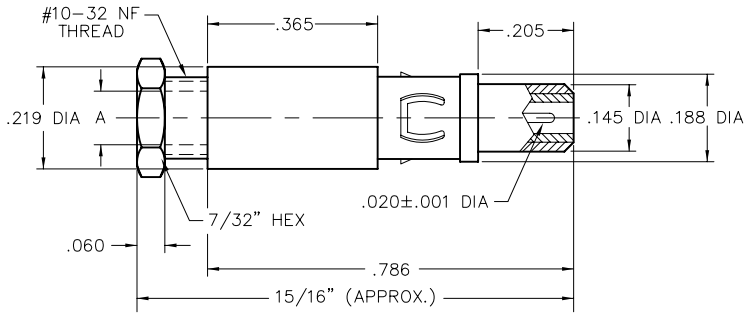


COAX, MALE

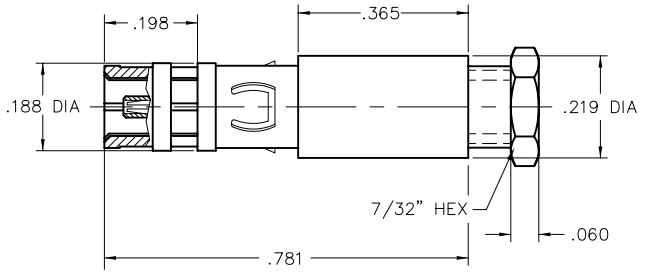


COAX, FEMALE

PART #	DESCRIPTION	DIA "A"	CABLE TYPE	PART #	DESCRIPTION
WTC188P	COAX, STRAIGHT, PIN	.115	RG174, RG188, RG316	WTC188S	COAX, STRAIGHT, SOCKET
WTC196P		.089	RG178, RG196	WTC196S	
WTC085P			SEMI–RIGID, .085–50 OHM	WTC085S	

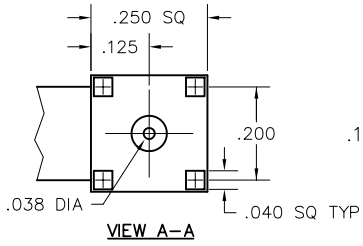


VIEW A–A

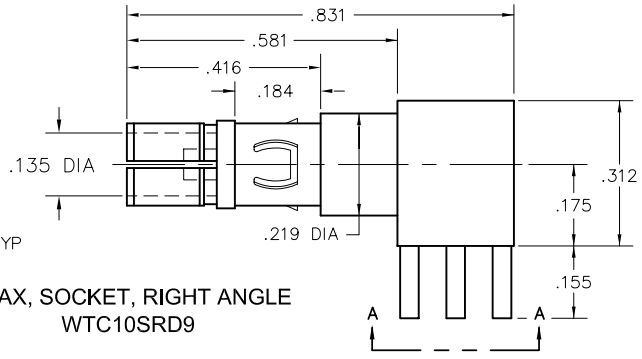


COAX, SOCKET, RIGHT ANGLE
WTC10SRD9

Fixed Jacksets

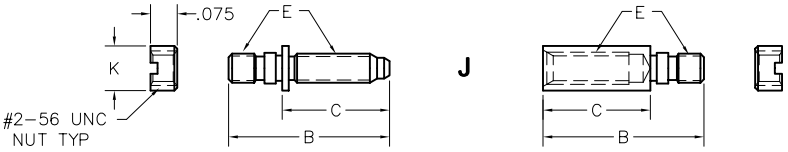


J	Fixed jackset
JFF	Two fixed jacksockets
JFM	Fixed jackset, reversed
JMM	Two fixed jackscrews

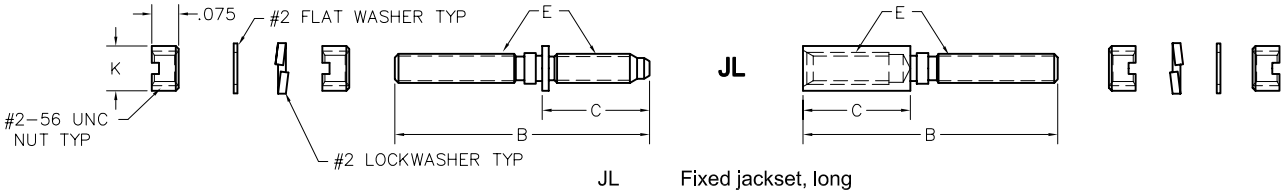


JL	Fixed jackset, long
JLFF	Two fixed jacksockets, long
JLFM	Fixed jackset, long, reversed
JLMM	Two fixed jackscrews, long


Turning Jacksets

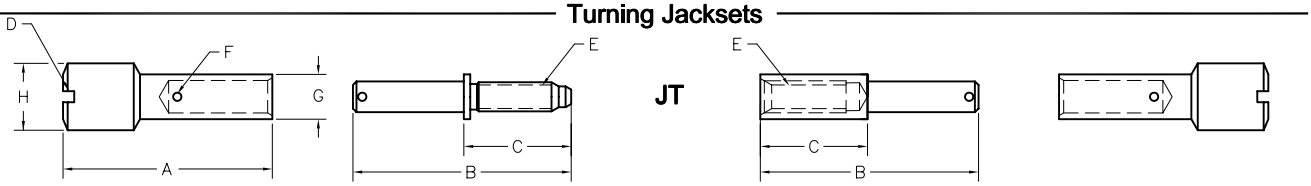


JT	Turning jackset, .500"
JTFF	Two turning jacksockets, .500"
JTFM	Turning jackset, reversed, .500"
JTMM	Two turning jackscrews, .500"

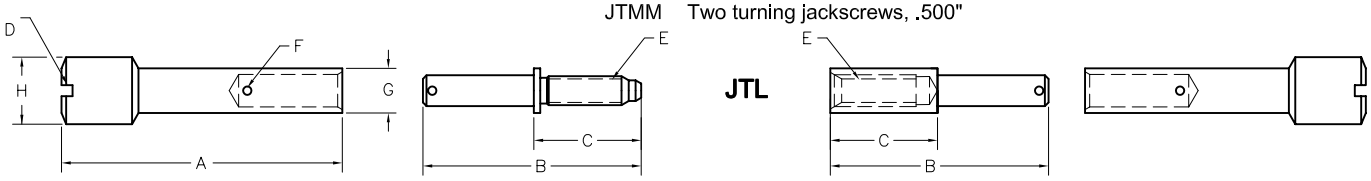


JTL	Turning jackset, .700"
JTLFF	Two turning jacksockets, .700"
JTLFM	Turning jackset, reversed, .700"
JTLMM	Two turning jackscrews, .700"

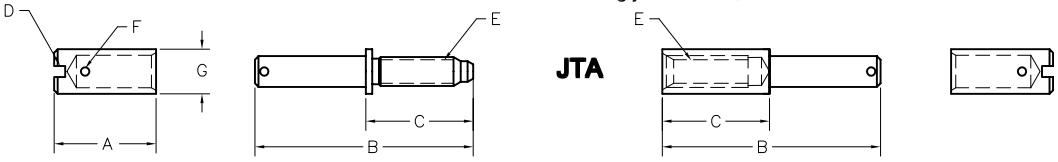

JTA	Turning jackset, .200"
JTAFF	Two turning jacksockets, .200"
JTAFM	Turning jackset, reversed, .200"
JTAMM	Two turning jackscrews, .200"

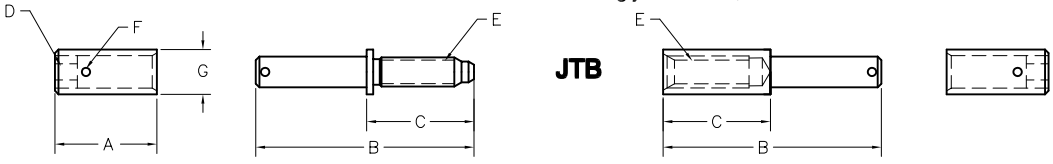


JTB	Turning jackset, .200"
JTBFF	Two turning jacksockets, .200"
JTBFM	Turning jackset, reversed, .200"
JTBMM	Two turning jackscrews, .200"

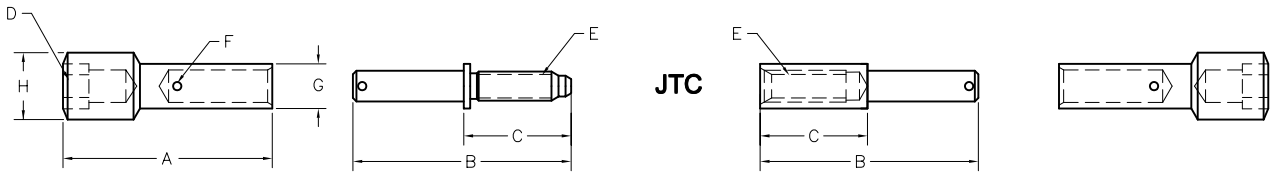

JTC Turning jackset, .500"
JTCFF Two turning jacksockets, .500"
JTCFM Turning jackset, reversed, .500"
JTCMM Two turning jackscrews, .500"

GROOVE PIN


SEE NOTE 1



Notes:
1. Groove pin secures knob to jackscrew and jacksocket on turning hardware.
2. For nut spanner wrench, refer to Data Sheet on WA-9.
3. When installing fixed jacksets, apply Loctite® to threads.
4. Under normal conditions, jackscrews are at socket contact position #1, and jacksockets are at pin contact position #1.
5. Spanner nuts, lockwashers and flat washers shall be supplied separately.


DIMENSIONS										
HARDWARE TYPE	FOR MOLDING TYPE	A	B	C	D	E	F	G	H	K
J	WTA, WTB	—	.450	.300	—	#2–56 UNC THD	—	.125 DIA	—	.125 DIA
JL	WTA, WTB	—	.712		—		—		—	.125 DIA
JT	WTA, WTB WTDX, WTK	.585	.610 .860		.031 x .031 SLOT		.033 DIA		.187 DIA	—
JTA	WTA, WTB WTDX, WTK	.285	.610 .860		.031 x .031 SLOT				.125 DIA	—
JTB	WTA, WTB WTDX, WTK	.285	.610 .860		5/64 INT HEX				.125 DIA	—
JTC	WTA, WTB WTDX, WTK	.585	.610 .860		7/64 INT HEX				.187 DIA	—
JTL	WTA, WTB WTDX, WTK	.785	.610 .860		.031 x .031 SLOT				.187 DIA	—

Guide Sets

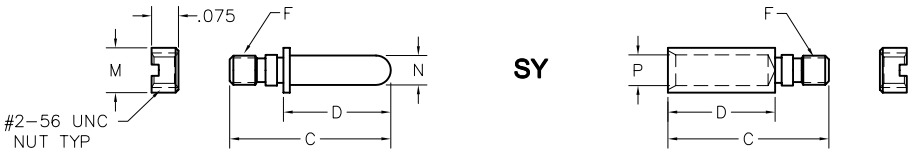


SY

SY	Guide set
SYFF	Two guide sockets
SYFM	Guide set, reversed
SYMM	Two guide pins

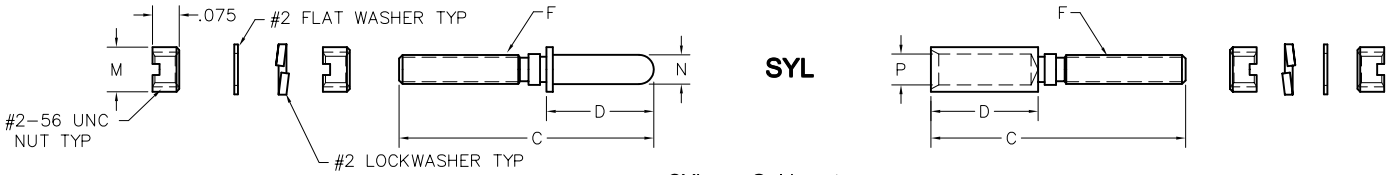


SYL

SYL	Guide set
SYLFF	Two guide sockets
SYLFM	Guide set, reversed
SYLMM	Two guide pins

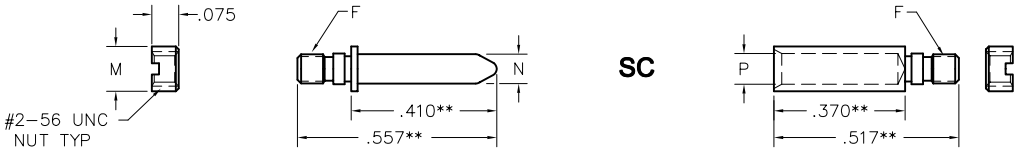


SC

Guide Sets, Polarized

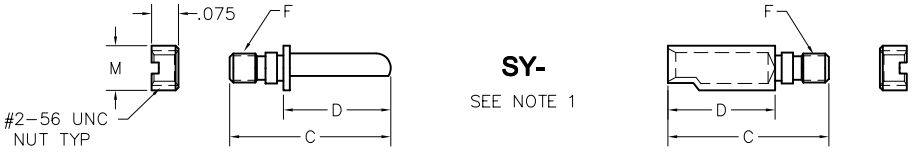

SY-
SEE NOTE 1

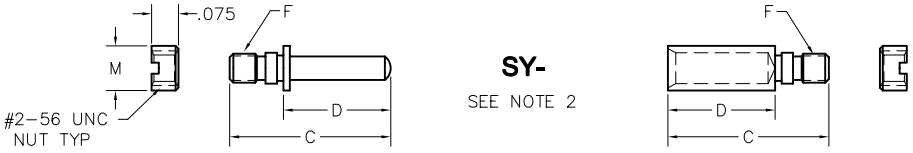

SY-
SEE NOTE 2

Notes:
1. For polarized "D" shaped guides, see WA-17. Polarizing also available for SYL- and SC- guide sets. To order, use P/N WTBSY-* , WTBSYL-* or WTBSC-*. See WA-17 for dash number requirement (example WTBSY-33).
2. For universal type test connector, see WA-17.
3. For nut spanner wrench, refer to Data Sheet on WA-9.
4. When installing guide sets, apply Loctite® to threads.
5. Under normal conditions, jackscrews are at socket contact position #1, and jacksockets are at pin contact position #1.
6. Spanner nuts, lockwashers and flat washers shall be supplied separately.

DIMENSIONS							
PART NUMBER	FOR MOLDING TYPE	C	D	F	M	N	P
WTBSC	WTB COAX	**	**	#2–56 UNC THD	.125 DIA	.082 DIA	.086 DIA
WTBSY	WTA,WTB,WG,WGA	.450	.300				
WTBTSY	WTBT	.653					
WTKSY	WTK	.712					
WTBSYL	WTA,WTB,WG						

AirBorn

Hardware Availability by Connector Series


WTA / B WG - Receptacle										**Body Height = .335**		
Style:	J	JL	SY	SY-*	SYL	SYL-*	JTA	JTB	JTD	JT	JTC	JTL
Mating:	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130
Termn:	-----	.247	-----	-----	.247	.247	.200	.200	.230	.500	.500	.700
WTB / WG - Plug										**Body Height = .400**		
Style:	J	JL	SY	SY-*	SYL	SYL-*	JTA	JTB	JTD	JT	JTC	JTL
Mating:	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130
Termn:	-----	.182	-----	-----	.182	.182	.135	.135	.165	.435	.435	.635
WGA - Receptacle										**Body Height = .375**		
Style:	J	JL	SY	SY-*	SYL	SYL-*	JTA	JTB	JTD	JT	JTC	JTL
Mating:	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130
Termn:	-----	.207	-----	-----	.207	.207	.160	.160	.190	.460	.460	.660
WGA - Plug										**Body Height = .400**		
Style:	J	JL	SY	SY-*	SYL	SYL-*	JTA	JTB	JTD	JT	JTC	JTL
Mating:	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130
Termn:	-----	.182	-----	-----	.182	.182	.135	.135	.165	.435	.435	.635
WGR92 - Receptacle										**Body Height = .375**		
Style:	J	JL	SY	SY-*	SYL	SYL-*	JTA	JTB	JTD	JT	JTC	JTL
Mating:	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130	.130
Termn:	-----	.207	-----	-----	.207	.207	.160	.160	.190	.460	.460	.660
WGR92 - Plug										**Body Height = .350**		
Style:	JCL	SYCL	SYCL-*				JTA	JTB	JT	JTL		
Mating:	.130	.130	.130				.130	.130	.130	.130		
Termn:	.247	.120	.120				.205	.205	.505	.705		
WRD122 - Receptacle										**Body Height = .375**		
Style:	J	JL	SY	SY-	SYL	SYL-*	L-D65	JTA	JTB	JTC	JT	JTL
Mating:	.130	.130	.130	.130	.130	.130	-----	.130	.130	.130	.130	.130
Termn:	-----	.207	-----	-----	.207	.207	.230	.160	.160	.460	.460	.660
WRD122 - Plug										**Body Height = .635**		
Style:	JCL	SYCL	SYCL-*									
Mating:	.130	.130	.010									
Termn:	-----	-----	-----									
WRF100 - Receptacle										**Body Height = .534**		
Style:	J	JL										
Mating:	.130	.130										
Termn:	-----	.250										
WRF100 - Plug										**Body Height = .430**		
Style:								JTB				JTL
Mating:								.130				.130
Termn:								.190				.705
WRTBT - Receptacle										**Body Height = .525**		
Style:	J		SY	SY-*			JTA	JTB	JTD	JT	JTC	JTL
Mating:	.130		.130	.130			.130	.130	.130	.130	.130	.130
Termn:	-----		-----	-----			.175	.175	.205	.475	.500	.675
PA - Receptacle										**Body Height = .375**		
Style:	SY	J						JTB		JT		
Mating:	.175	.160						.175		.175		
Termn:	.200	.277						.314		1.054		
PA - Plug										**Body Height = .375**		
Style:	SY	J						JTB		JT		JTL
Mating:	.210	.160						.160		.160		.175
Termn:	.273	.277						.314		1.054		1.170


Hardware Availability by Connector Series

WTK / WTDX - Plug or Receptacle												**Body Height = .585**
Style:	J	JL	SY	SY-*			JTA	JTB	JTD	JT	JTC	JTL
Mating:	.130	.130	.130	.130			.130	.130	.130	.130	.130	.130
Termn:	-----	.247	-----	-----			.200	.200	.230	.500	.500	.700
WTA59												**Body Height = .285**
Style:	J						JTA	JTB				
Mating:	.130						.130	.130				
Termn:	-----						.135	.135				
WRBC - Receptacle												**Body Height = .530**
Style:		SC	SC-*									
Mating:		.145	.145									
Termn:		-----	-----									
WRBC - Plug												**Body Height = .515**
Style:		SC	SC-*									
Mating:		.185	.185									
Termn:		-----	-----									
WTB Coax - Receptacle												**Body Height = .335**
Style:	J	JL	SY	SY-*			JTA	JTB		JT		
Mating:	.130	.130	.130	.130			.130	.130		.130		
Termn:	-----	.247	-----	-----			.200	.200		.500		
WTB Coax - Plug												**Body Height = .400**
Style:	J	SY	SY-*				JTA	JTB		JT		
Mating:	.130	.130	.130				.130	.130		.130		
Termn:	-----	-----	-----				.135	.135		.435		
WTB Coax - Receptacle with SC hardware (guide socket)												**Body Height = .335**
Style:			SC	SC-*								
Mating:			.145	.145								
Termn:			.040	.040								
WTB Coax - Plug with SC hardware (guide pin)												**Body Height = .400**
Style:			SC	SC-*								
Mating:			.185	.185								
Termn:			-----	-----								
WTB Coax - Receptacle with SC hardware (guide pin)												**Body Height = .335**
Style:			SC	SC-*								
Mating:			.185	.185								
Termn:			.040	.040								
WTB Coax - Plug with SC hardware (guide socket)												**Body Height = .400**
Style:			SC	SC-*								
Mating:			.145	.145								
Termn:			-----	-----								

Polarization

D-Shaped Guide Sets

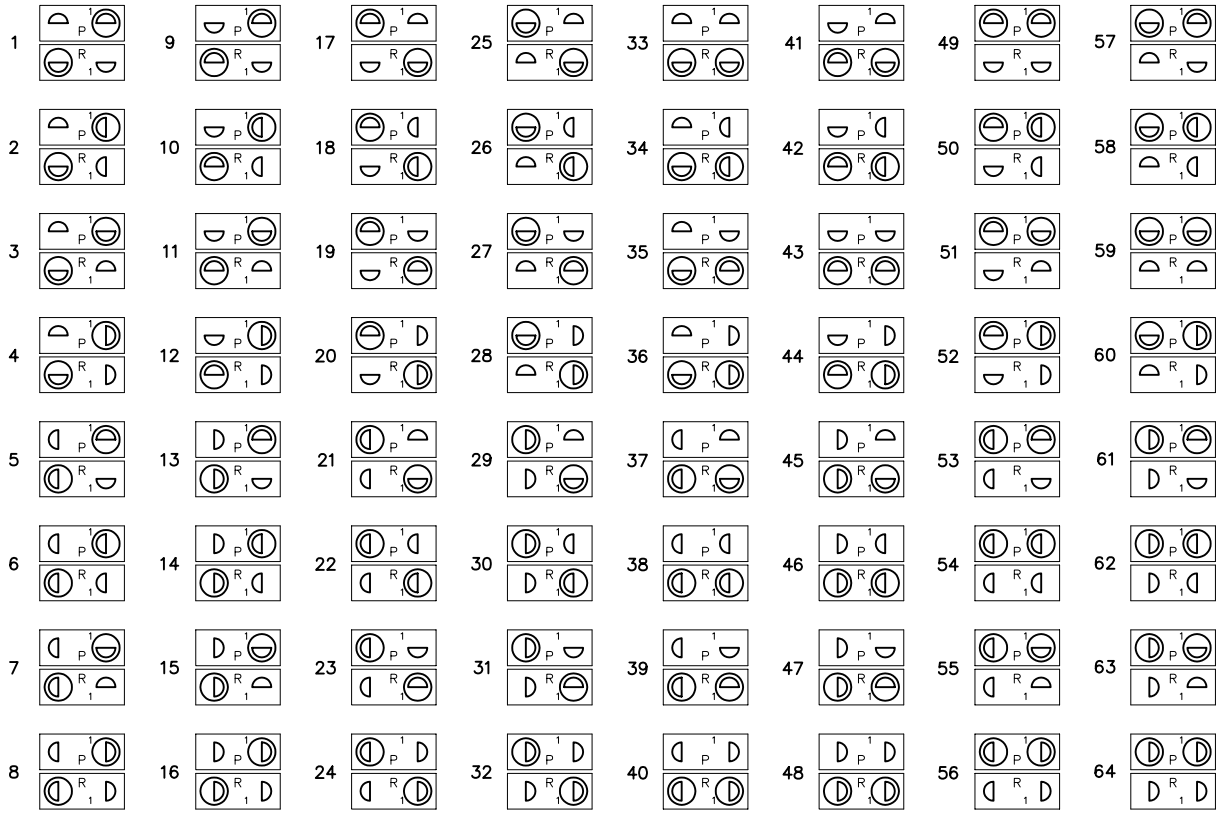

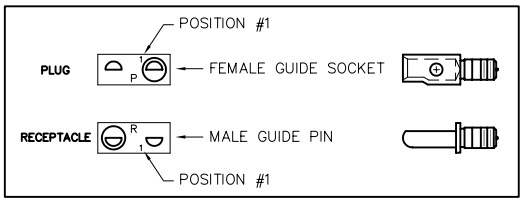

For optimum safety, use polarization number 1-6-11-16-17-22-27 or 32 when possible. These positions will exclude entry of guide pins at both ends of connectors when an attempt is made to mate incorrectly.

Select the appropriate two digit number above and include in the hardware code of the part number.

Example:

Plug	WTB20PR7SY-1
Receptacle	WTB20SECSY-1

To order polarization guide set only, use p/n WTBSY-1. This set consists of one "D-shaped" guide pin, one "D-shaped" guide socket and two spanner nuts (#2-56 UNC thread).

WTBSY-0 is WTBSY-1 except guide set is assembled in connector with the "-1" configuration without applying Loctite.®

To change polarization position of guide sets, order spanner nut wrench, part number TN1680 or TN4612. See WA-9.

SERIES	NO. OF CONTACTS	POLARIZED GUIDE SET CODE	POLAR. GUIDE SET ONLY
WTB WG	10 THRU 160	SY-1 (EX. WTB70SACSY-1)	WTBSY-1
WTB COAX TYPE	20-3, 20-6	SC-1 (EX. WTB20-6SACSC-1)	WTBSC-1
WTK	10 THRU 70	SY-1 (EX. WTKA70SSY-1)	WTKSY-1

UNIVERSAL TEST CONNECTORS

The following test guide sets are designed to mate with any of several connectors having different polarization positions. Note that the square guide pin in test connector will enter the D-shaped socket in any of the four positions in which it may be installed. Likewise, the round guide socket in test connector will fit the D-shaped pin in any position.

-65		For positions -1 thru -16
-66		For positions -17 thru -32
-67P -67R		For positions -33 thru -48
-68P -68R		For positions -49 thru -64

When ordering -67 or -68 guide sets only, P (plug) or R (receptacle) must be noted. Ex: WTBSY-67R. Not required if guides are assembled in the connector. Ex: WTB70SACSY-67.


WTBSY-65, WTBSC-65 & WTKSY-65 is Universal Guide Set only, consisting of: one square guide pin
one round guide socket
two spanner nuts (#2-56 thd)

Polarization

Polarizing Pin Applications

PIN CONTACT
–STRAIGHT THRU–
CONNECTOR BODY


WT, WTA
WTAV, WTBV



WTA**PCJTA443–1, –2...

SOCKET CONTACT


WT, WTA, WTAX,
WTB, WTBX



WTA**SAD9JL444–1, –2...

PIN CONTACT
–RIGHT ANGLE–
CONNECTOR BODY


WG, WGA, WGE,
WT, WTB

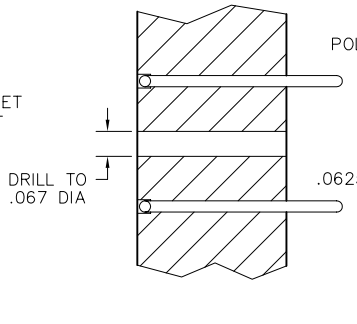

WTB**PR7SY515–1, –2...

SOCKET CONTACT


WG, WGA, WGE,
WT, WTA, WTAX,
WTB, WTDXA, WTKA

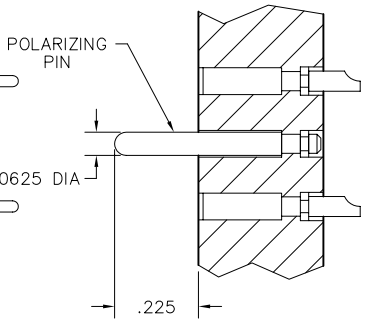

WTB**SACSY515–1, –2...

Notes:


1. CODE 443 - Polarizing pin installed in contact position noted by dash number.
2. CODE 444 - Contact position noted by dash number is left open.
3. Either pin or socket contacts can be used with 443 or 444.
4. ** = connector size
5. For additional dimensions and other information, refer to catalog data sheet of specific connector.

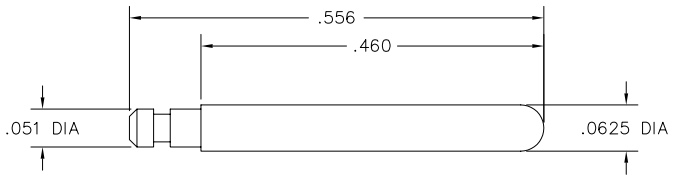

STAINLESS STEEL
POLARIZING PIN

SOCKET CONTACT


WTDXA, WTKA

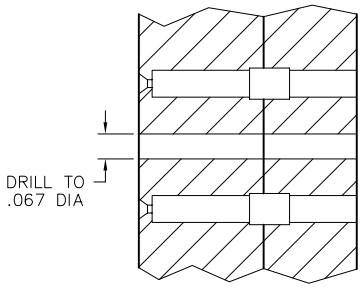

WTDXA**SJT478–1, –2...
WTKA**SSY478–1, –2...

SOCKET CONTACT

WTDXA, WTKA

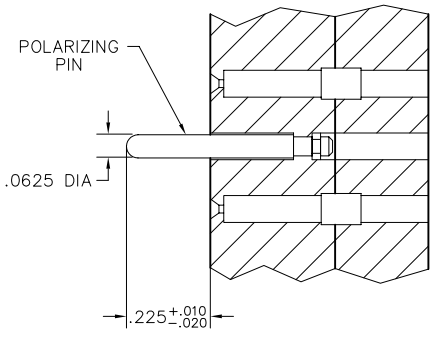

WTDXA**SJT515–1, –2...
WTKA**SSY515–1, –2...

MIL-C-55302/55 thru MIL-C-55302/57
Cross Reference Chart

## Indicates Number of Contacts: 10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66 or 70		## Indicates Number of Contacts: 10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66 or 70	
MIL-C-55302/55 - Standard Insertion Force Contacts - or - MIL-C-55302/55L - Low Insertion Force Contacts		**MIL-C-55302/57**	
MIL Number	**W Series**	**MIL Number**	**W Series**
/55-A##L	WTA##SACJTL	/57A##X	WTB##PR7SY
/55-A##M	WTA##SACJT	/57A##Y	WTB##PR7SY-1
/55-A##S	WTA##SACJTA	/57A##Y-2 thru -64	WTB##PR7SY-2 thru -64
/55-A##H	WTA##SACJTB	/57A##Y-0	WTB##PR7SY-0
		/57A##S	WTB##PR7JTA
/55-B##L	WTA##SAD9JTL	/57A##H	WTB##PR7JTB
/55-B##M	WTA##SAD9JT		
/55-B##S	WTA##SAD9JTA	/57B##X	WTB##PR9SY
/55-B##H	WTA##SAD9JTB	/57B##Y	WTB##PR9SY-1
		/57B##Y-2 thru -64	WTB##PR9SY-2 thru -64
/55-C##L	WTA##SAD11JTL	/57B##Y-0	WTB##PR9SY-0
/55-C##M	WTA##SAD11JT	/57B##S	WTB##PR9JTA
/55-C##S	WTA##SAD11JTA	/57B##H	WTB##PR9JTB
/55-C##H	WTA##SAD11JTB		
		/57C##X	WTB##PR11SY
/55-D##L	WTA##SAF3JTL	/57C##Y	WTB##PR11SY-1
/55-D##M	WTA##SAF3JT	/57C##Y-2 thru -64	WTB##PR11SY-2 thru -64
/55-D##S	WTA##SAF3JTA	/57C##Y-0	WTB##PR11SY-0
/55-D##H	WTA##SAF3JTB	/57C##S	WTB##PR11JTA
		/57C##H	WTB##PR11JTB
/55-E##L	WTA##SAD15JTL		
/55-E##M	WTA##SAD15JT	/57-01	TN1680 Spanner Nut Wrench
/55-E##S	WTA##SAD15JTA		
/55-E##H	WTA##SAD15JTB		
/55-F##L	WTA##SAF6JTL		
/55-F##M	WTA##SAF6JT		
/55-F##S	WTA##SAF6JTA		
/55-F##H	WTA##SAF6JTB		
MIL-C-55302/56			
/56A##	WTA##PCJL		
/56B##	WTA##PD9JL		
/56C##	WTA##PD11JL		
/56D##	WTA##PW40JL		
/56E##	WTA##PF3JL		
/56F##	WTA##PF6JL		

## Indicates Number of Contacts: 10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66 or 70	
MIL-C-55302/58 - Standard Insertion Force Contacts - or - MIL-C-55302/58L - Low Insertion Force Contacts	
MIL Number	**W Series**
/58-A##X	WTB##SACSY
/58-A##Y	WTB##SACSY-1
/58-A##Y-2 thru -64	WTB##SACSY-2 thru -64
/58-A##Y-0	WTB##SACSY-0
/58-A##F	WTB##SACJ
/58-A##S	WTB##SACJTA
/58-A##H	WTB##SACJTB
/58-B##X	WTB##SAD9SY
/58-B##Y	WTB##SAD9SY-1
/58-B##Y-2 thru -64	WTB##SAD9SY-2 thru -64
/58-B##Y-0	WTB##SAD9SY-0
/58-B##F	WTB##SAD9J
/58-B##S	WTB##SAD9JTA
/58-B##H	WTB##SAD9JTB
/58-C##X	WTB##SAD11SY
/58-C##Y	WTB##SAD11SY-1
/58-C##Y-2 thru -64	WTB##SAD11SY-2 thru -64
/58-C##Y-0	WTB##SAD11SY-0
/58-C##F	WTB##SAD11J
/58-C##S	WTB##SAD11JTA
/58-C##H	WTB##SAD11JTB
/58-D##X	WTB##SAW40SY
/58-D##Y	WTB##SAW40SY-1
/58-D##Y-2 thru -64	WTB##SAW40SY-2 thru -64
/58-D##Y-0	WTB##SAW40SY-0
/58-D##F	WTB##SAW40J
/58-D##S	WTB##SAW40JTA
/58-D##H	WTB##SAW40JTB
/58-E##X	WTB##SAF3SY
/58-E##Y	WTB##SAF3SY-1
/58-E##Y-2 thru -64	WTB##SAF3SY-2 thru -64
/58-E##Y-0	WTB##SAF3SY-0
/58-E##F	WTB##SAF3J
/58-E##S	WTB##SAF3JTA
/58-E##H	WTB##SAF3JTB
/58-F##X	WTB##SAD15SY
/58-F##Y	WTB##SAD15SY-1
/58-F##Y-2 thru -64	WTB##SAD15SY-2 thru -64
/58-F##Y-0	WTB##SAD15SY-0
/58-F##F	WTB##SAD15J
/58-F##S	WTB##SAD15JTA
/58-F##H	WTB##SAD15JTB

## Indicates Number of Contacts: 10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66 or 70	
MIL-C-55302/58	
MIL Number	**W Series**
/58-H##X	WTB##SAF6SY
/58-H##Y	WTB##SAF6SY-1
/58-H##Y-2 thru -64	WTB##SAF6SY-2 thru -64
/58-H##Y-0	WTB##SAF6SY-0
/58-H##F	WTB##SAF6J
/58-H##S	WTB##SAF6JTA
/58-H##H	WTB##SAF6JTB
/59 ### Indicates Number of Contacts: 90, 100 or 120	
/59A###X	WTB###PR7SY
/59A###Y	WTB###PR7SY-1
/59A###Y-2 thru -64	WTB###PR7SY-2 thru -64
/59A###Y-0	WTB###PR7SY-0
/59A###F	WTB###PR7J
/59A###S	WTB###PR7JTA
/59A###H	WTB###PR7JTB
/59B###X	WTB###PR9SY
/59B###Y	WTB###PR9SY-1
/59B###Y-2 thru -64	WTB###PR9SY-2 thru -64
/59B###Y-0	WTB###PR9SY-0
/59B###F	WTB###PR9J
/59B###S	WTB###PR9JTA
/59B###H	WTB###PR9JTB
/59C###X	WTB###PR11SY
/59C###Y	WTB###PR11SY-1
/59C###Y-2 thru -64	WTB###PR11SY-2 thru -64
/59C###Y-0	WTB###PR11SY-0
/59C###F	WTB###PR11J
/59C###S	WTB###PR11JTA
/59C###H	WTB###PR11JTB

AirBorn

## Indicates Number of Contacts: 90, 100 or 120	
MIL-C-55302/60 - Standard Insertion Force Contacts - or - MIL-C-55302/60L - Low Insertion Force Contacts	
MIL Number	**W Series**
/60-A###X	WTB###SACSY
/60-A###Y	WTB###SACSY-1
/60-A###Y-2 thru -64	WTB###SACSY-2 thru -64
/60-A###Y-0	WTB###SACSY-0
/60-A###F	WTB###SACJ
/60-A###S	WTB###SACJTA
/60-A###H	WTB###SACJTB
/60-B###X	WTB###SAD9SY
/60-B###Y	WTB###SAD9SY-1
/60-B###Y-2 thru -64	WTB###SAD9SY-2 thru -64
/60-B###Y-0	WTB###SAD9SY-0
/60-B###F	WTB###SAD9J
/60-B###S	WTB###SAD9JTA
/60-B###H	WTB###SAD9JTB
/60-C###X	WTB###SAD11SY
/60-C###Y	WTB###SAD11SY-1
/60-C###Y-2 thru -64	WTB###SAD11SY-2 thru -64
/60-C###Y-0	WTB###SAD11SY-0
/60-C###F	WTB###SAD11J
/60-C###S	WTB###SAD11JTA
/60-C###H	WTB###SAD11JTB
/60-D###X	WTB###SAW40SY
/60-D###Y	WTB###SAW40SY-1
/60-D###Y-2 thru -64	WTB###SAW40SY-2 thru -64
/60-D###Y-0	WTB###SAW40SY-0
/60-D###F	WTB###SAW40J
/60-D###S	WTB###SAW40JTA
/60-D###H	WTB###SAW40JTB
/60-E###X	WTB###SAD15SY
/60-E###Y	WTB###SAD15SY-1
/60-E###Y-2 thru -64	WTB###SAD15SY-2 thru -64
/60-E###Y-0	WTB###SAD15SY-0
/60-E###F	WTB###SAD15J
/60-E###S	WTB###SAD15JTA
/60-E###H	WTB###SAD15JTB

## Indicates Number of Contacts: 10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66 or 70	
MIL-C-55302/61	
/61A##	WTB##PR7J
/61B##	WTB##PR9J
/61C##	WTB##PR11J

## Indicates Number of Contacts: 10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66 or 70	
MIL-C-55302/62	
MIL Number	**W Series**
/62-A##L	WTAX##SACJTL
/62-A##M	WTAX##SACJT
/62-A##S	WTAX##SACJTA
/62-A##H	WTAX##SACJTB
/62-B##L	WTAX##SAD9JTL
/62-B##M	WTAX##SAD9JT
/62-B##S	WTAX##SAD9JTA
/62-B##H	WTAX##SAD9JTB
/62-C##L	WTAX##SAD11JTL
/62-C##M	WTAX##SAD11JT
/62-C##S	WTAX##SAD11JTA
/62-C##H	WTAX##SAD11JTB
/62-D##L	WTAX##SAF3JTL
/62-D##M	WTAX##SAF3JT
/62-D##S	WTAX##SAF3JTA
/62-D##H	WTAX##SAF3JTB
/62-E##L	WTAX##SAD15JTL
/62-E##M	WTAX##SAD15JT
/62-E##S	WTAX##SAD15JTA
/62-E##H	WTAX##SAD15JTB
/62-F##L	WTAX##SAF6JTL
/62-F##M	WTAX##SAF6JT
/62-F##S	WTAX##SAF6JTA
/62-F##H	WTAX##SAF6JTB
MIL-C-55302/63	
/63A##L	WTA##PCJTL
/63A##M	WTA##PCJT
/63A##S	WTA##PCJTA
/63A##H	WTA##PCJTB
/63A##F	WTAV##PCJL
/63A##X	WTAV##PCSYL
/63A##Y	WTAV##PCSYL-1
/63A##Y-2 thru -64	WTAV##PCSYL-2 thru -64
/63A##Y-0	WTAV##PCSYL-0

## Indicates Number of Contacts: 10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66 or 70		## Indicates Number of Contacts: 10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66 or 70	
MIL-C-55302/63		**MIL-C-55302/64 - Standard Insertion Force Contacts - or - MIL-C-55302/64L - Low Insertion Force Contacts**	
MIL Number	**W Series**	**MIL Number**	**W Series**
/63B##L	WTA##PD9JTL	/64-A##F	WTA##SACJL
/63B##M	WTA##PD9JT	/64-A##X	WTAX##SACSYL
/63B##S	WTA##PD9JTA	/64-A##Y	WTAX##SACSYL-1
/63B##H	WTA##PD9JTB	/64-A##Y-2 thru -64	WTAX##SACSYL-2 thru -64
/63B##F	WTAV##PD9JL	/64-A##Y-0	WTAX##SACSYL-0
/63B##X	WTAV##PD9SYL	/64-B##F	WTA##SAD9JL
/63B##Y	WTAV##PD9SYL-1	/64-B##X	WTAX##SAD9SYL
/63B##Y-2 thru -64	WTAV##PD9SYL-2 thru -64	/64-B##Y	WTAX##SAD9SYL-1
/63B##Y-0	WTAV##PD9SYL-0	/64-B##Y-2 thru -64	WTAX##SAD9SYL-2 thru -64
		/64-B##Y-0	WTAX##SAD9SYL-0
/63C##L	WTA##PD11JTL		
/63C##M	WTA##PD11JT	/64-C##F	WTA##SAD11JL
/63C##S	WTA##PD11JTA	/64-C##X	WTAX##SAD11SYL
/63C##H	WTA##PD11JTB	/64-C##Y	WTAX##SAD11SYL-1
/63C##F	WTAV##PD11JL	/64-C##Y-2 thru -64	WTAX##SAD11SYL-2 thru -64
		/64-C##Y-0	WTAX##SAD11SYL-0
/63C##X	WTAV##PD11SYL		
/63C##Y	WTAV##PD11SYL-1	/64-D##F	WTA##SAW40JL
/63C##Y-2 thru -64	WTAV##PD11SYL-2 thru -64	/64-D##X	WTAX##SAW40SYL
/63C##Y-0	WTAV##PD11SYL-0	/64-D##Y	WTAX##SAW40SYL-1
		/64-D##Y-2 thru -64	WTAX##SAW40SYL-2 thru -64
/63D##L	WTA##PF3JTL	/64-D##Y-0	WTAX##SAW40SYL-0
/63D##M	WTA##PF3JT		
/63D##S	WTA##PF3JTA	/64-E##F	WTA##SAF3JL
/63D##H	WTA##PF3JTB	/64-E##X	WTAX##SAF3SYL
/63D##F	WTAV##PF3JL	/64-E##Y	WTAX##SAF3SYL-1
		/64-E##Y-2 thru -64	WTAX##SAF3SYL-2 thru -64
/63D##X	WTAV##PF3SYL	/64-E##Y-0	WTAX##SAF3SYL-0
/63D##Y	WTAV##PF3SYL-1		
/63D##Y-2 thru -64	WTAV##PF3SYL-2 thru -64	/64-F##F	WTA##SAF6JL
/63D##Y-0	WTAV##PF3SYL-0	/64-F##X	WTAX##SAF6SYL
		/64-F##Y	WTAX##SAF6SYL-1
/63E##L	WTA##PF6JTL	/64-F##Y-2 thru -64	WTAX##SAF6SYL-2 thru -64
/63E##M	WTA##PF6JT	/64-F##Y-0	WTAX##SAF6SYL-0
/63E##S	WTA##PF6JTA		
/63E##H	WTA##PF6JTB		
/63E##F	WTAV##PF6JL		
/63E##X	WTAV##PF6SYL		
/63E##Y	WTAV##PF6SYL-1		
/63E##Y-2 thru -64	WTAV##PF6SYL-2 thru -64		
/63E##Y-0	WTAV##PF6SYL-0		

AirBorn

## Indicates Number of Contacts: 10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66 or 70		Number of Contacts: 160	
MIL-C-55302/65 and /66 - Standard Insertion Force Contacts - or - MIL-C-55302/65L and /66L - Low Insertion Force Contacts		**MIL-C-55302/139**	
MIL Number	**W Series**	**MIL Number**	**W Series**
/65-##X	WTKA##SASY	/139B160X	WG160SAD7SY
/65-##Y	WTKA##SASY-1	/139B160Y	WG160SAD7SY-1
/65-##Y-2 thru -64	WTKA##SASY-2 thru -64	/139B160Y-2 thru -64	WG160SAD7SY-2 thru -64
/65-##Y-0	WTKA##SASY-0	/139B160Y-0	WG160SAD7SY-0
/65-##F	WTKA##SAJ	/139B160F	WG160SAD7J
/65-##S	WTKA##SAJTA	/139B160S	WG160SAD7JTA
/65-##H	WTKA##SAJTB	/139B160H	WG160SAD7JTB
/65-01 Crimp Contact	WTK2222S	/139C160X	WG160SAD9SY
/65-02 Crimp Contact	WTK2222SA Low Force Socket	/139C160Y	WG160SAD9SY-1
/66-##L	WTDXA##SAJTL	/139C160Y-2 thru -64	WG160SAD9SY-2 thru -64
/66-##M	WTDXA##SAJT	/139C160Y-0	WG160SAD9SY-0
/66-##S	WTDXA##SAJTA	/139C160F	WG160SAD9J
/66-##F	WTDXA##SAJ	/139C160S	WG160SAD9JTA
/66-##H	WTDXA##SAJTB	/139C160H	WG160SAD9JTB
MIL-C-55302/138	**Number of Contacts: 160**		
/138A160X	WG160PR7SY	/139D160X	WG160SAW40SY
/138A160Y	WG160PR7SY-1	/139D160Y	WG160SAW40SY-1
/138A160Y-2 thru -64	WG160PR7SY-2 thru -64	/139D160Y-2 thru -64	WG160SAW40SY-2 thru -64
/138A160Y-0	WG160PR7SY-0	/139D160Y-0	WG160SAW40SY-0
/138A160F	WG160PR7J	/139D160F	WG160SAW40J
/138A160S	WG160PR7JTA	/139D160S	WG160SAW40JTA
/138A160H	WG160PR7JTB	/139D160H	WG160SAW40JTB
/138B160X	WG160PR9SY	/139E160X	WG160SAD11SY
/138B160Y	WG160PR9SY-1	/139E160Y	WG160SAD11SY-1
/138B160Y-2 thru -64	WG160PR9SY-2 thru -64	/139E160Y-2 thru -64	WG160SAD11SY-2 thru -64
/138B160Y-0	WG160PR9SY-0	/139E160Y-0	WG160SAD11SY-0
/138B160F	WG160PR9J	/139E160F	WG160SAD11J
/138B160S	WG160PR9JTA	/139E160S	WG160SAD11JTA
/138B160H	WG160PR9JTB	/139E160H	WG160SAD11JTB
/138C160X	WG160PR11SY	/139F160X	WG160SAF3SY
/138C160Y	WG160PR11SY-1	/139F160Y	WG160SAF3SY-1
/138C160Y-2 thru -64	WG160PR11SY-2 thru -64	/139F160Y-2 thru -64	WG160SAF3SY-2 thru -64
/138C160Y-0	WG160PR11SY-0	/139F160Y-0	WG160SAF3SY-0
/138C160F	WG160PR11J	/139F160F	WG160SAF3J
/138C160S	WG160PR11JTA	/139F160S	WG160SAF3JTA
/138C160H	WG160PR11JTB	/139F160H	WG160SAF3JTB
MIL-C-55302/139	**Number of Contacts: 160**		
/139A160X	WG160SACSY	/139H160X	WG160SAF6SY
/139A160Y	WG160SACSY-1	/139H160Y	WG160SAF6SY-1
/139A160Y-2 thru -64	WG160SACSY-2 thru -64	/139H160Y-2 thru -64	WG160SAF6SY-2 thru -64
/139A160Y-0	WG160SACSY-0	/139H160Y-0	WG160SAF6SY-0
/139A160F	WG160SACJ	/139H160F	WG160SAF6J
/139A160S	WG160SACJTA	/139H160S	WG160SAF6JTA
/139A160H	WG160SACJTB	/139H160H	WG160SAF6JTB

Call (972) 931-3200 · Fax (972) 931-9305 · www.AirBorn.com

"WB" SERIES - .050"

MIL-C-55302

Contents

"WB" Series
.050" Rectangular Plastic Board Level Connectors

WB-1	Contents	
WB-2	Specifications	
WB-3	Performance	
WB-4	Part number description	
	2-Row Connectors - PC Card or SMT to Board, Sizes: 20-132	
WB-5	WB	Plug, right angle, with mounting ears
	WB	Receptacle, straight, with mounting ears
WB-7	WBB, WBA	Plug, straight, surface mount, with mounting ears
	WB	Receptacle, straight, with mounting ears
WB-9		Hardware
WB-10	WB	Board layout - plug, right angle
WB-11	WB	Board layout - receptacle, straight
WB-12	WBB, WBA	Board layout - plug, straight, surface mount
	Military Cross Reference	
WB-13	Chart	

Specifications
Materials and Finishes *

Pin Contacts:	Phosphor Bronze per ASTM B 139
Socket Contacts:	BeCu per MIL-C-55302
Contact Finish:	Au per ASTM B 488-, SAE AMS 2422. Localized finish over MIL-C-55302
Molded Insulators:	Glass filled polyphenylene sulfide per MIL-M-24519, Type GST-40F
Keying Features:	Polarized octagonal guides can be a molded integral part of the insulator or separate stainless steel hardware.
Tolerances:	Unless otherwise specified: Fractions = ±1/64" Decimals = ±.010" Angles = ±5°

Note: AirBorn can manufacture special configurations for your exact specifications.

* = Reference the above listed specifications or an equivalent industry standard when applicable

Performance
Reference MIL-C-55302

Contact Rating:	1.5 amperes
Solderability:	Tested to MIL-STD-202, Method 208
Operating Temperature:	-65° to +125° C or -85° to +257° F
Contact Engagement Force:	2.0 oz. maximum with .0189/.0190 diameter test pin in accordance with SAE AS 31971
Contact Separation Force:	.10 oz. maximum with .0169/.0170 diameter test pin in accordance with SAE AS 31971

Category:	Requirements:	Test Method Per: SAE AS 13441
Test Voltage:	600 V, RMS, 60 Hz @ sea level 150 V, RMS, 60 Hz @ 70,000 feet	#3001
Insulation Resistance:	5,000 megohms minimum @ 500 VDC	#3003
Durability:	500 connector mating cycles	
Contact Resistance:	.0375 volt maximum drop @ 1.5 amperes - (.025 ohms)	#3004
Contact Resistance:	.0375 volt maximum drop @ 1.5 amperes -	

Part Number Description

Each part number consists of four elements: series, size (number of contacts), type of contacts, and type of hardware.

Each catalog page shows the choices available for each of these elements. By selecting one option from each category on the page, you can build a set of connectors to meet your requirements.

Each part number is identified by a combination of letters and/or numbers of varying lengths. These numbers are written together without spaces or punctuation.

Series:
The series letters identify the connector body style. Follow choices on each catalog page for series numbers.

Size:
The size is determined by the number of contacts in the connector, and is an integral part of the part number. Order only sizes shown on the catalog page unless otherwise noted.

Contacts:
Each page also identifies all contact options for a given connector.

Hardware:
Hardware options are shown on each catalog page. Follow the choices for each connector.

Note:
Each page is as comprehensive as possible. However, if you do not find a particular connector size or option, please contact the factory for further assistance.


AirBorn


2 · ROW
PC Card to Chassis or Board

.050"

WB - WB

20 thru 132 Contacts

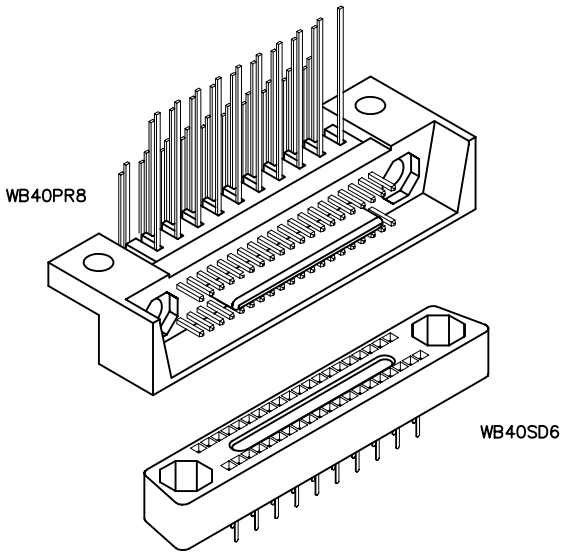

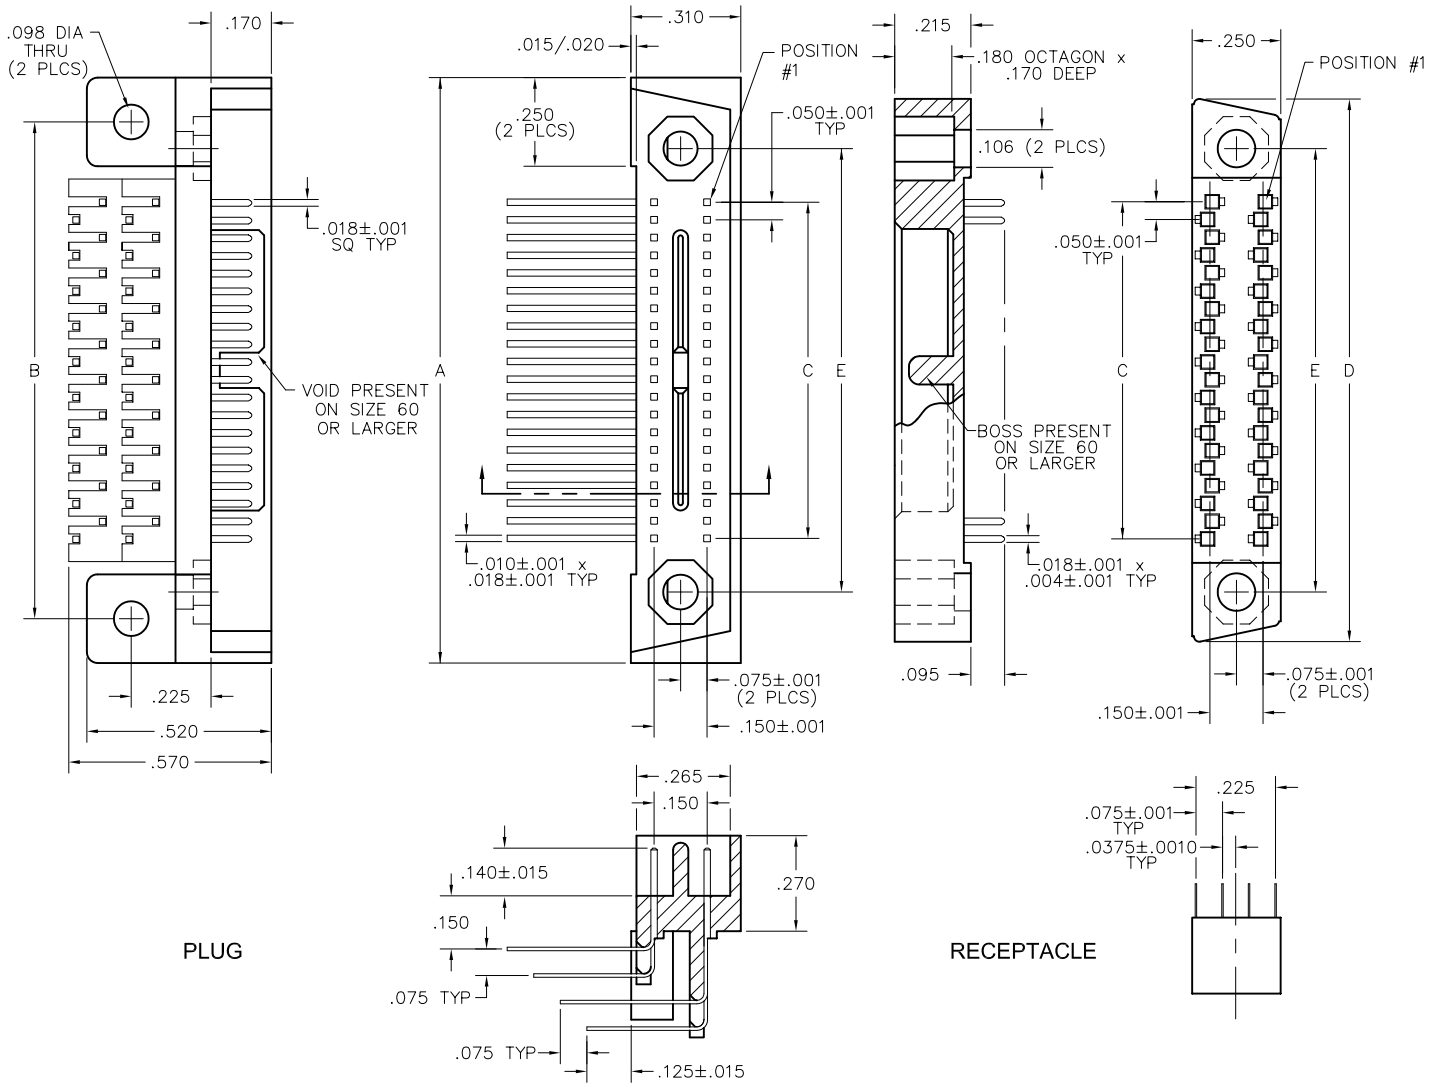

PLUG: WB40PR8
RECEPTACLE: WB40SD6
XXXXXXXXXXX

PLUG	RECEPTACLE
SERIES	
WB 2 row, right angle, plug, with mounting ears	WB 2 row, straight, receptacle, with mounting ears
SIZE	
20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 128, 132	20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 128, 132
CONTACTS	
TYPE CONTACTS/TERMINATIONS:	TYPE CONTACTS/TERMINATIONS:
PR8 Pin, right angle, dip solder, .125"	SD6 Socket, straight, dip solder, .095"
	SD9 Socket, straight, dip solder, .140"
	SD12 Socket, straight, dip solder, .190"
	SD19 Socket, straight, dip solder, .300"
HARDWARE	
STYLE OF HARDWARE: (See WB-9)	STYLE OF HARDWARE: (See WB-9)
K*_* Integral keying guides, polarized	K*_* Integral keying guides, polarized
KY*_* Stainless steel keying guides, polarized	KY*_* Stainless steel keying guides, polarized
JMM 2 stainless steel fixed jackscrews	JTFF 2 stainless steel turning jacksockets

DIMENSIONS					
SIZE	A	B	C	D	E
20	1.150	.900	.450	1.030	.750
30	1.400	1.150	.700	1.280	1.000
40	1.650	1.400	.950	1.530	1.250
50	1.900	1.650	1.200	1.780	1.500
60	2.150	1.900	1.450	2.030	1.750
70	2.400	2.150	1.700	2.280	2.000
80	2.650	2.400	1.950	2.530	2.250
90	2.900	2.650	2.200	2.780	2.500
100	3.150	2.900	2.450	3.030	2.750
110	3.400	3.150	2.700	3.280	3.000
128	3.850	3.600	3.150	3.730	3.450
132	3.950	3.700	3.250	3.830	3.550

AirBorn

2 · ROW


SMT Card to Chassis or Board


.050"

WBB - WB

WBA - WB

20 thru 132 Contacts

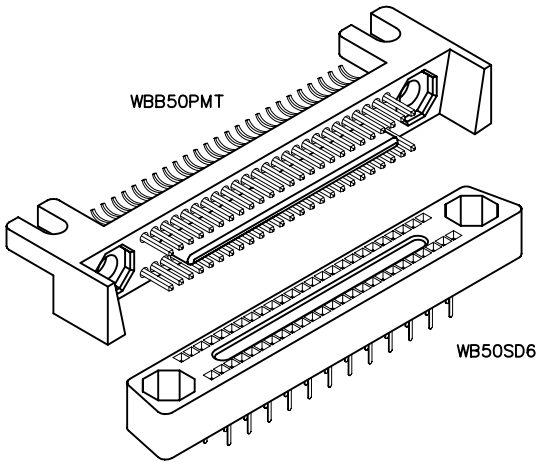

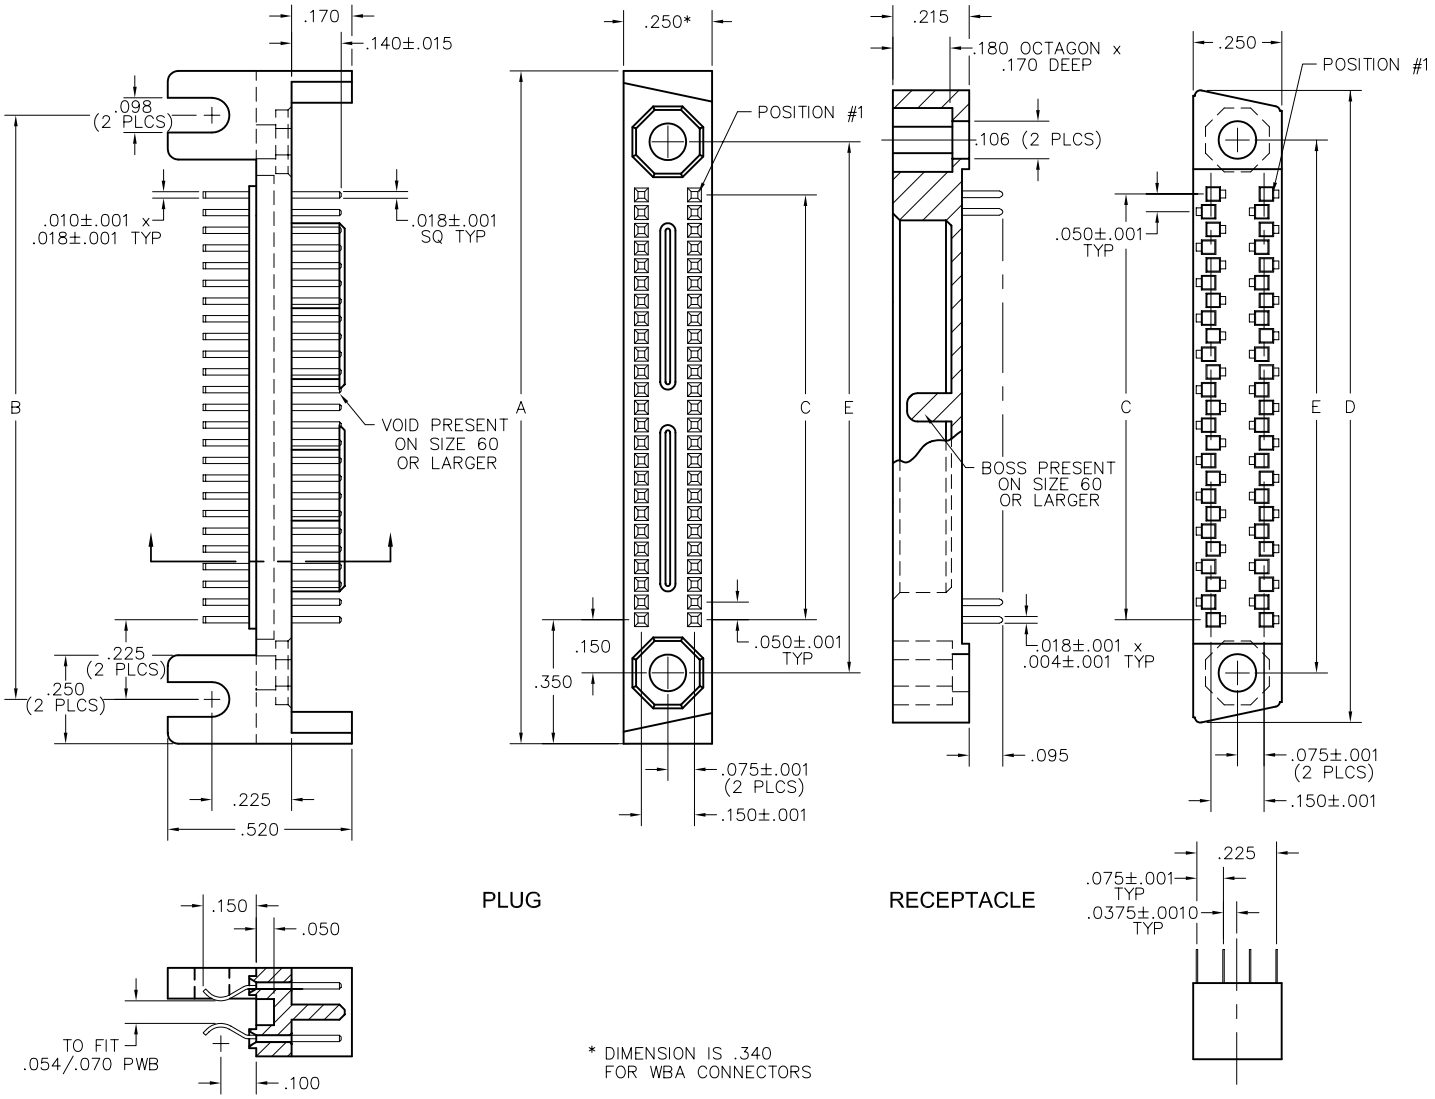

* DIMENSION IS .340
FOR WBA CONNECTORS

PLUG: WBB50PMT
RECEPTACLE: WB50SD6
XXXXXXXXXXXX


PLUG		RECEPTACLE	
SERIES			
WBB	2 row, SMT, plug, with mounting ears	WB	2 row, straight, receptacle, with mounting ears
WBA	2 row, SMT, plug, full skirt, with mounting ears		
SIZE			
20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 128, 132		20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 128, 132	
CONTACTS			
TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
PMT	Pin, card edge SMT (Board: .054/.070)	SD6	Socket, straight, dip solder, .095"
		SD9	Socket, straight, dip solder, .140"
		SD12	Socket, straight, dip solder, .190"
		SD19	Socket, straight, dip solder, .300"
HARDWARE			
STYLE OF HARDWARE: (See WB-9)		STYLE OF HARDWARE: (See WB-9)	
K*_*	Integral keying guides, polarized	K*_*	Integral keying guides, polarized
KY*_*	Stainless steel keying guides, polarized	KY*_*	Stainless steel keying guides, polarized
JMM	2 stainless steel fixed jackscrews	JTFF	2 stainless steel turning jacksockets

DIMENSIONS					
SIZE	A	B	C	D	E
20	1.150	.900	.450	1.030	.750
30	1.400	1.150	.700	1.280	1.000
40	1.650	1.400	.950	1.530	1.250
50	1.900	1.650	1.200	1.780	1.500
60	2.150	1.900	1.450	2.030	1.750
70	2.400	2.150	1.700	2.280	2.000
80	2.650	2.400	1.950	2.530	2.250
90	2.900	2.650	2.200	2.780	2.500
100	3.150	2.900	2.450	3.030	2.750
110	3.400	3.150	2.700	3.280	3.000
128	3.850	3.600	3.150	3.730	3.450
132	3.950	3.700	3.250	3.830	3.550


Hardware

Polarization


Integral Keying Guides

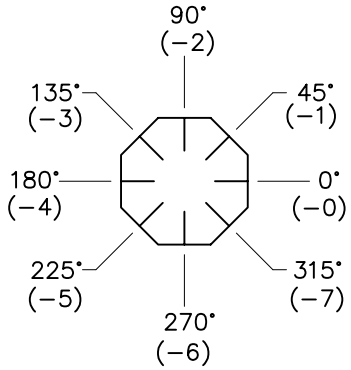


Polarization



Polarization Chart

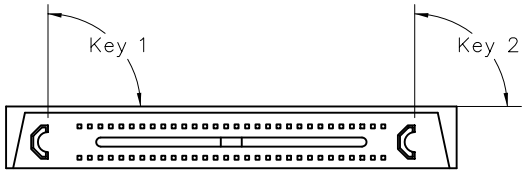

Example: WB**PR8K2-2
(Plug)

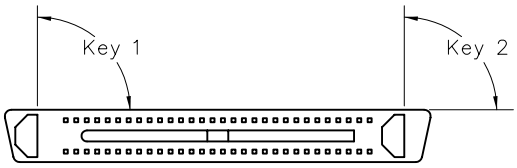


Example: WB**SD6K2-2
(Receptacle)

Notes:
1. Each "dash" number represents 45° clocking from horizontal (0°).
2. The first number designates "Key 1", the second number designates "Key 2".

Hardware Options:


Hardware Style: KY* - *



Stainless Steel Polarized Guide

Plug	Mates with Receptacle	Plug	Mates with Receptacle
–0	–0	–4	–4
–1	–7	–5	–3
–2	–6	–6	–2
–3	–5	–7	–1


Hardware Style: JMM
(Plug only)



Groove Pin


Fixed Jackscrew
(#4-40 UNC-2A)

Hardware Style: JTFF
(Receptacle only)



E-Ring

Turning Jacksocket

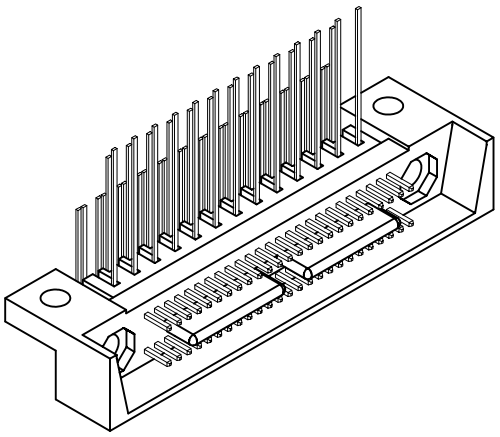


2 • ROW
Right Angle PTH Plug
.050"

WB













20 thru 132 Contacts

Recommended Board Layout

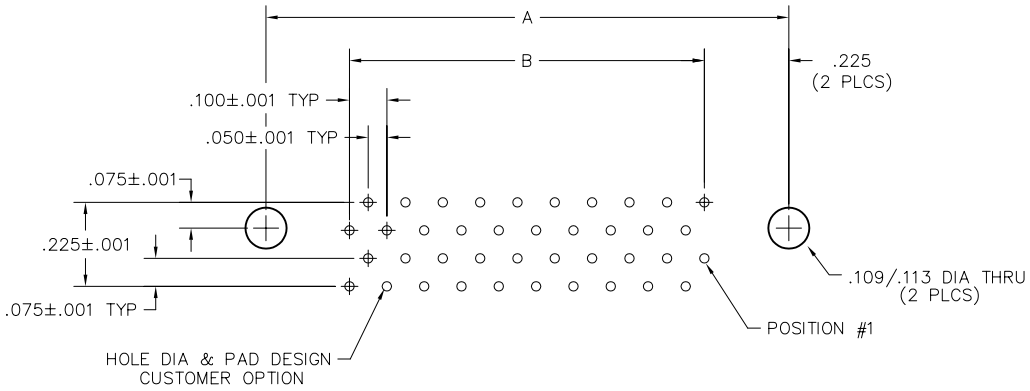

RIGHT ANGLE PTH PLUG
PC BOARD VIEWED FROM COMPONENT SIDE

DIMENSIONS		
SIZE	A	B
20	.900	.450
30	1.150	.700
40	1.400	.950
50	1.650	1.200
60	1.900	1.450
70	2.150	1.700
80	2.400	1.950
90	2.650	2.200
100	2.900	2.450
110	3.150	2.700
128	3.600	3.150
132	3.700	3.250

SIZE	CONTACT ID	SIZE	CONTACT ID	SIZE	CONTACT ID
20		60		100	
30		70		110	
40		80		128	
50		90		132	


AirBorn

2 · ROW
Straight PTH Rcpt
.050"


WB

20 thru 132 Contacts

Recommended Board Layout

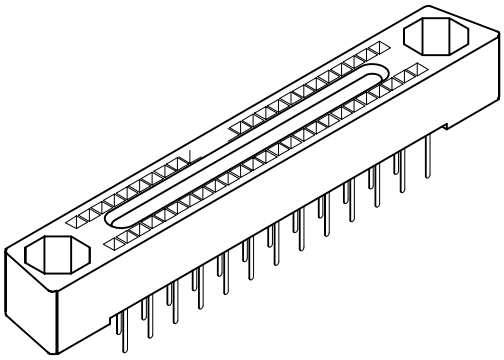


DIMENSIONS		
SIZE	A	B
20	.750	.450
30	1.000	.700
40	1.250	.950
50	1.500	1.200
60	1.750	1.450
70	2.000	1.700
80	2.250	1.950
90	2.500	2.200
100	2.750	2.450
110	3.000	2.700
128	3.450	3.150
132	3.550	3.250

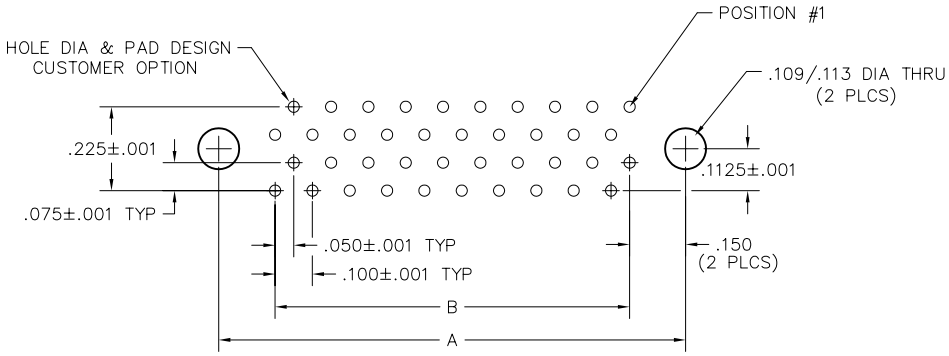

STRAIGHT PTH RECEPTACLE
PC BOARD VIEWED FROM COMPONENT SIDE

SIZE	CONTACT ID	SIZE	CONTACT ID	SIZE	CONTACT ID
20	9 7 5 3 1 10 8 6 4 2 19 17 15 13 11 20 18 16 14 12	60	29 27 3 1 30 28 4 2 59 57 33 31 60 58 34 32	100	49 47 3 1 50 48 4 2 99 97 53 51 100 98 54 52
30	15 13 11 9 7 5 3 1 14 12 10 8 6 4 2 30 28 26 24 22 20 18 16 29 27 25 23 21 19 17	70	35 33 3 1 34 32 4 2 70 68 38 36 69 67 39 37	110	55 53 3 1 54 52 4 2 110 108 58 56 109 107 59 57
40	19 17 3 1 20 18 4 2 39 37 23 21 40 38 24 22	80	39 37 3 1 40 38 4 2 79 77 43 41 80 78 44 42	128	63 61 3 1 64 62 4 2 127 125 67 65 128 126 68 66
50	25 23 3 1 24 22 4 2 50 48 28 26 49 47 29 27	90	45 43 3 1 44 42 4 2 90 88 48 46 89 87 49 47	132	65 63 3 1 66 64 4 2 131 129 69 67 132 130 70 68

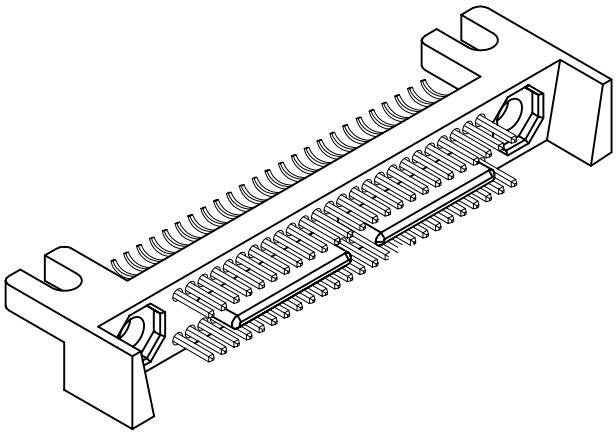


2 • ROW
Straight SMT Plug
.050"

WBB, WBA













20 thru 132 Contacts

Recommended Board Layout

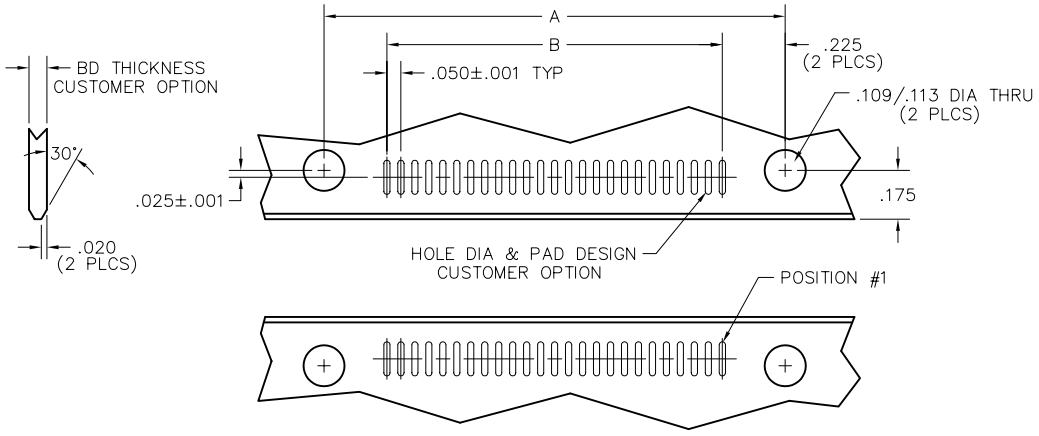

STRAIGHT SMT PLUG

DIMENSIONS		
SIZE	A	B
20	.900	.450
30	1.150	.700
40	1.400	.950
50	1.650	1.200
60	1.900	1.450
70	2.150	1.700
80	2.400	1.950
90	2.650	2.200
100	2.900	2.450
110	3.150	2.700
128	3.600	3.150
132	3.700	3.250

SIZE	CONTACT ID	SIZE	CONTACT ID	SIZE	CONTACT ID
20		60		100	
30		70		110	
40		80		128	
50		90		132	

AirBorn

Military Cross Reference Chart

MIL Number	WB Series	Size	Description
M55302/117-01	WB20PR8	20	Right angle plug, 3/4 skirt
M55302/117-02	WB30PR8	30	Right angle plug, 3/4 skirt
M55302/117-03	WB40PR8	40	Right angle plug, 3/4 skirt
M55302/117-04	WB50PR8	50	Right angle plug, 3/4 skirt
M55302/117-05	WB60PR8	60	Right angle plug, 3/4 skirt
M55302/117-06	WB70PR8	70	Right angle plug, 3/4 skirt
M55302/117-07	WB80PR8	80	Right angle plug, 3/4 skirt
M55302/117-08	WB90PR8	90	Right angle plug, 3/4 skirt
M55302/117-09	WB100PR8	100	Right angle plug, 3/4 skirt
M55302/117-10	WB110PR8	110	Right angle plug, 3/4 skirt
M55302/117-11	WB128PR8	128	Right angle plug, 3/4 skirt
M55302/118-01	WBB20PMT	20	Surface mount, no skirt
M55302/118-02	WBB30PMT	30	Surface mount, no skirt
M55302/118-03	WBB40PMT	40	Surface mount, no skirt
M55302/118-04	WBB50PMT	50	Surface mount, no skirt
M55302/118-05	WBB60PMT	60	Surface mount, no skirt
M55302/118-06	WBB70PMT	70	Surface mount, no skirt
M55302/118-07	WBB80PMT	80	Surface mount, no skirt
M55302/118-08	WBB90PMT	90	Surface mount, no skirt
M55302/118-09	WBB100PMT	100	Surface mount, no skirt
M55302/118-10	WBB110PMT	110	Surface mount, no skirt
M55302/118-11	WBB128PMT	128	Surface mount, no skirt
M55302/118-12	WBA20PMT	20	Surface mount, full skirt
M55302/118-13	WBA30PMT	30	Surface mount, full skirt
M55302/118-14	WBA40PMT	40	Surface mount, full skirt
M55302/118-15	WBA50PMT	50	Surface mount, full skirt
M55302/118-16	WBA60PMT	60	Surface mount, full skirt
M55302/118-17	WBA70PMT	70	Surface mount, full skirt
M55302/118-18	WBA80PMT	80	Surface mount, full skirt
M55302/118-19	WBA90PMT	90	Surface mount, full skirt
M55302/118-20	WBA100PMT	100	Surface mount, full skirt
M55302/118-21	WBA110PMT	110	Surface mount, full skirt
M55302/118-22	WBA128PMT	128	Surface mount, full skirt
M55302/119-01	WB20SD9/12	20	Receptacle, .140 and .190 lead length
M55302/119-02	WB30SD9/12	30	Receptacle, .140 and .190 lead length
M55302/119-03	WB40SD9/12	40	Receptacle, .140 and .190 lead length
M55302/119-04	WB50SD9/12	50	Receptacle, .140 and .190 lead length
M55302/119-05	WB60SD9/12	60	Receptacle, .140 and .190 lead length
M55302/119-06	WB70SD9/12	70	Receptacle, .140 and .190 lead length
M55302/119-07	WB80SD9/12	80	Receptacle, .140 and .190 lead length
M55302/119-08	WB90SD9/12	90	Receptacle, .140 and .190 lead length
M55302/119-09	WB100SD9/12	100	Receptacle, .140 and .190 lead length
M55302/119-10	WB110SD9/12	110	Receptacle, .140 and .190 lead length
M55302/119-11	WB128SD9/12	128	Receptacle, .140 and .190 lead length
M55302/119-12	WB100SD19	100	Receptacle, .300 lead length
M55302/119-13	WB110SD19	110	Receptacle, .300 lead length
M55302/119-14	WB128SD12	128	Receptacle, .190 lead length