1-2213362-4 ✔ ACTIVE

LUMAWISE | LUMAWISE Dimming Receptacle

TE Internal #: 1-2213362-4

Connector, Not Rotatable, Wire-to-Component, 3 Position, Sealable, Power & Signal, LUMAWISE Dimming Receptacle, ANSI Street Lighting Receptacles

View on TE.com >

Connectors > Lighting Connectors > Street Lighting Controls > Street Lighting Receptacles > Receptacle Assembly







Lighting Product Type: **Connector**

Lighting Connector Features Included: **Not Rotatable**

Connector System: **Wire-to-Component**

Number of Positions: **3**

Sealable: **Yes**

All Receptacle Assembly (12)

Features

Product Type Features

Connector & Contact Terminates To	Wire & Cable
Lighting Product Type	Connector
Connector System	Wire-to-Component
Sealable	Yes

Configuration Features

Lighting Connector Features Included	Not Rotatable
Number of Positions	3

Body Features

Primary Product Color	Black

Contact Features

Contact Current Rating (Max)	15 A

Dimensions

Wire Size	18 – 14 AWG

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]

Operation/Application

Circuit Application	Power & Signal

Industry Standards

Compatible With Agency/Standards Products	ANSI

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 2361116-2
LUMAWISE Endurance N+ Shorting Cap, Open



TE Part # 2361116-1
LUMAWISE Endurance N+ Shorting Cap




TE Part # 1-2314786-1
LUMAWISE N ENHANCED BASE, FM ON, ZC YES




TE Part # 1-2361116-1
LUMAWISE Endurance N+ Shorting Cap

Also in the Series | LUMAWISE Dimming Receptacle

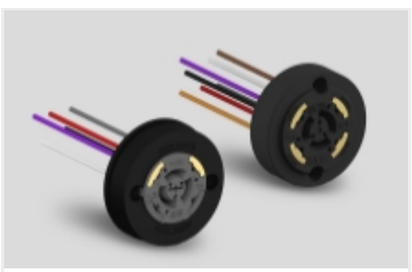


Street Lighting Receptacles(22)


Customers Also Bought

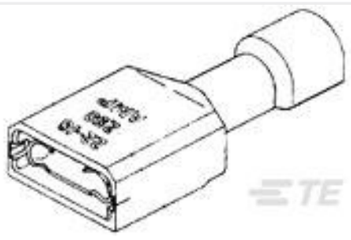

TE Part #2-520405-2
ULTRA-FAST 250 ASY REC 22-18 TPBR



TE Part #926933-1
WIRE PIN 18-17 AWG .01 PTPB



TE Part #CAT-Z23-DRE
LUMAWISE Endurance N Poke-In: Streetlight Dimming Receptacles



TE Part #6-2213362-1
RCPT ASSY,PHOTOCONTROL,105C,3 P



TE Part #1-2361116-1
LUMAWISE Endurance N+ Shorting Cap

Documents

Product Drawings

RCPT ASSY,DIMMABLE PHOTOCONTROL,105C,3/4

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-2213362-4_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2213362-4_B.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1-2213362-4_B.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English

Agency Approvals

UL_CERT_CB_4789600659_TR_C1

English

UL_CERT_CB_US_37285_C1

English