1-534206-3 ✔ ACTIVE


AMPMODU | Modu Connector System

TE Internal #: 1-534206-3

PCB Mount Receptacle, Vertical, Board-to-Board, 26 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Modu Connector System

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

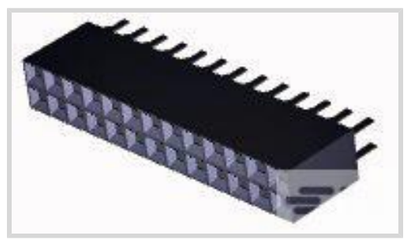

PCB Connector Type: **PCB Mount Receptacle**

Connector System: **Board-to-Board**

Number of Positions: **26**

Number of Rows: **2**

Centerline (Pitch): **2.54 mm [.1 in]**

Features

Product Type Features

Applied Pressure	Standard
PCB Connector Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Stackable	Yes
Number of Positions	26
Number of Rows	2
PCB Mount Orientation	Vertical
Board-to-Board Configuration	Parallel

Electrical Characteristics

Operating Voltage	333 VAC
Insulation Resistance	5000 MΩ

Body Features

Connector Profile	Standard
Primary Product Color	Black

Contact Features

	150 µin
Mating Square Post Dimension	.64 mm[.025 in]
Contact Shape & Form	Square
Contact Protection Type	Closed Entry Housing
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Mating Area Plating Material Thickness	.762 µm[30 µin]
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Socket
Contact Current Rating (Max)	2 A

Termination Features

Rectangular Termination Post & Tail Width	.69 mm[.027 in]
Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Termination Post & Tail Length	2.92 mm[.115 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Connector Mounting Type	Board Mount
Mating Alignment	Without
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Polyester GF

Dimensions

Connector Height	5.03 mm[.198 in]
Row-to-Row Spacing	2.54 mm[.1 in]
Stack Height	10.92 mm[.43 in]
PCB Thickness (Recommended)	1.57 mm[.055 – .094 in]

Usage Conditions

Housing Temperature Rating	Standard

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]

Operation/Application

Solder Process Feature	Board Standoff
Circuit Application	Signal

Industry Standards

Compatible With Approved Standards Products	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	17
Packaging Method	Box, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (13% in Component Part) **Article Safe Usage Statements:** Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

PCB Mount Receptacle, Vertical, Board-to-Board, 26 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Modu Connector System

Compatible Parts



TE Part # 6-146130-2
26 MODII HDR DRST SFMNT B/A LF

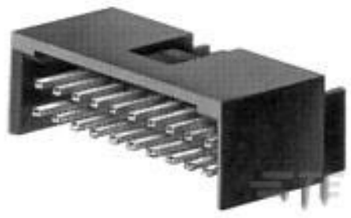

TE Part # 6-103164-1
26 MODII HDR DRRA 3/4SHRD LF



TE Part # 1-828296-3
13P MOD 2 STIFT LEI



TE Part # 6-146257-3
26 MODII HDR DRST B/A .100CL L

TE Part # 86286-1
KEYING PLUG



TE Part # 6-103166-1
26 MODII HDR DRRA SHRD LF



TE Part # 6-146261-3
26 MODII HDR DRST B/A .100CL LF




TE Part # 6-146253-3
26 MODII HDR DRST B/A .100CL LF




TE Part # 6-146131-2
26 MODII HDR DRST SFMNT B/A LF


Also in the Series | Modu Connector System

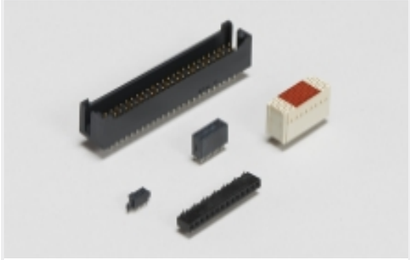


Board-to-Board Headers & Receptacles(235)

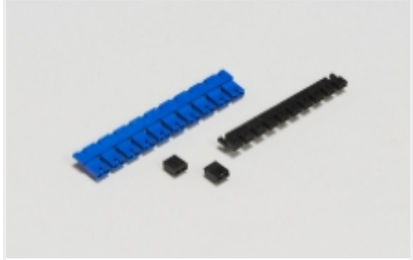

Board-to-Board Jumpers & Shunts(5)

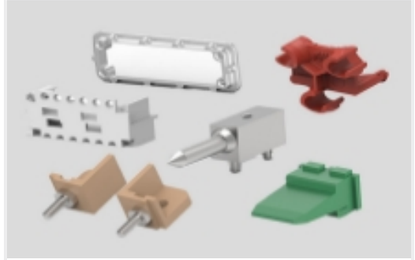


Connector Hardware(3)

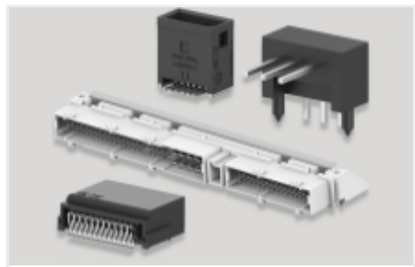

PCB Headers & Receptacles(235)

Customers Also Bought

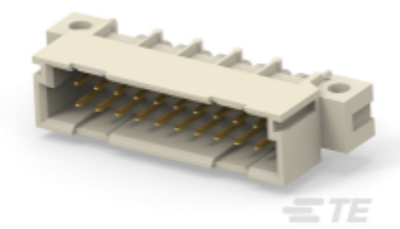

TE Part #384275-E
STVB/3 20 M AB VV 4-00 0606 * * 247 E007



TE Part #5-102203-9
12 MODII HDR SRRA SHRD LF



TE Part #534206-8
16 MODII VRT DR CE 100/115




TE Part #3-794677-8
8POS MICRO MNL ASSY,R/A,THRU



TE Part #4-1623925-2
CFR100 5% 4K7




TE Part #2-2176070-4
3521 91R 1% 2W



TE Part #2176244-5
CRGS0805 5% 2R2



TE Part #5-2176327-3
CRGP 0805 220K 1%

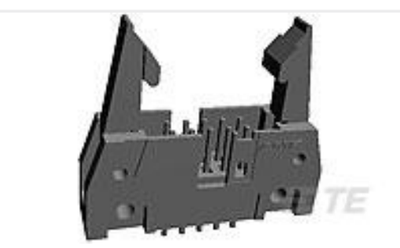

TE Part #5499160-8
A/L UNIV HDR 34P VERT SHT LAT



TE Part #5747250-6
09 MSFL PLUG RA 318 (SL,FM)

Documents

Product Drawings

26 MODII VRT DR CE 100/115

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-534206-3_N.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-534206-3_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-534206-3_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English