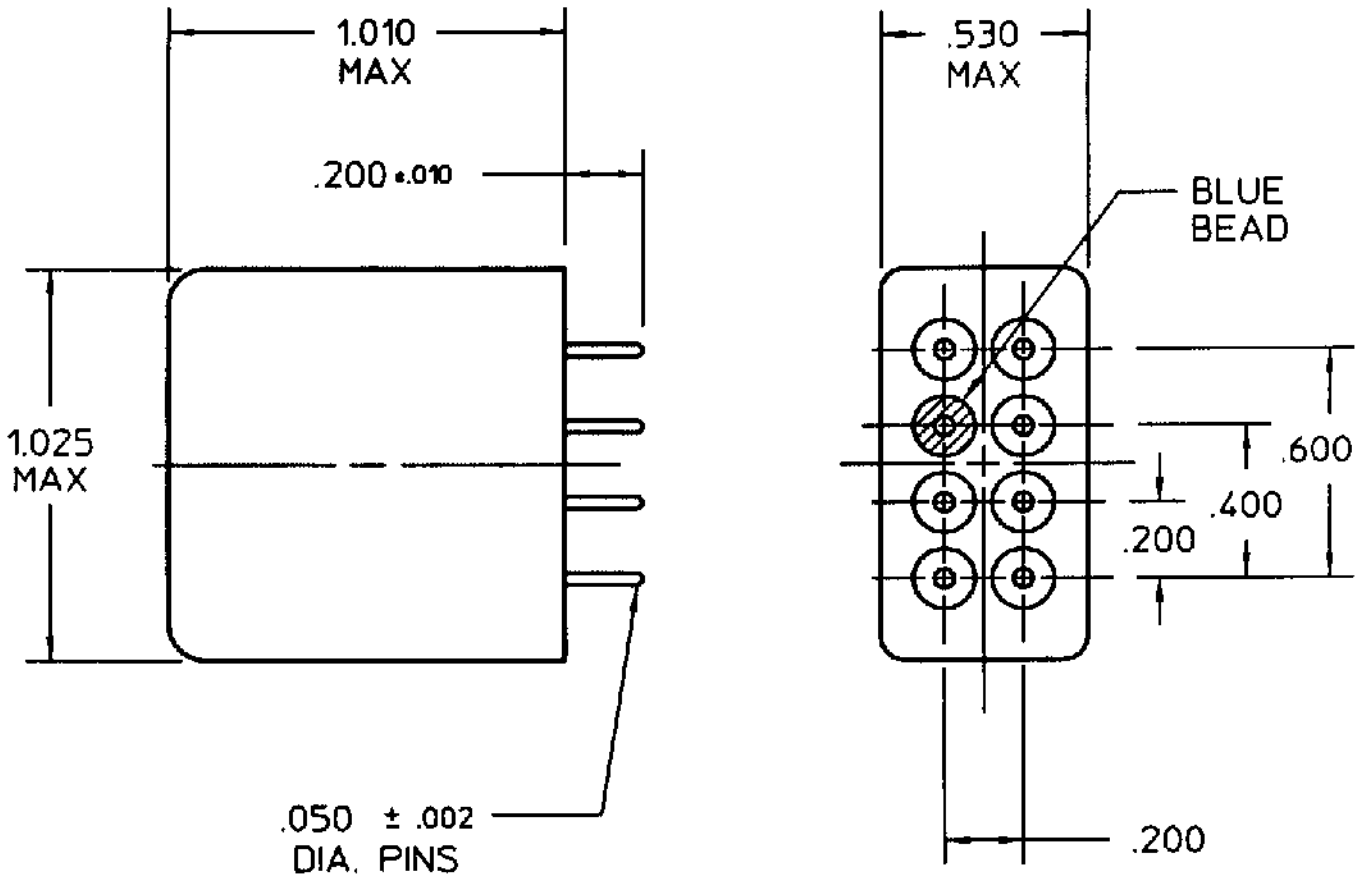


COIL: @ 25°C

RESISTANCE	75 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	.9 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.
OPERATE BOUNCE 2 MS MAX.
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

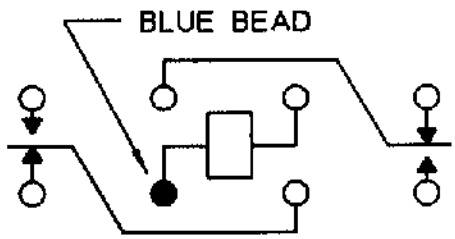

CONTACT RATING: 10 AMPS 28 VDC
5 AMPS 115 VAC/400 Hz RESISTIVE
100,000 OPERATIONS

DR. R.B. 1/20/94 CK. 1/20/94 JMB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I.
CUST. NO. STD.

TYPE "07" RELAY

B07A035BB1