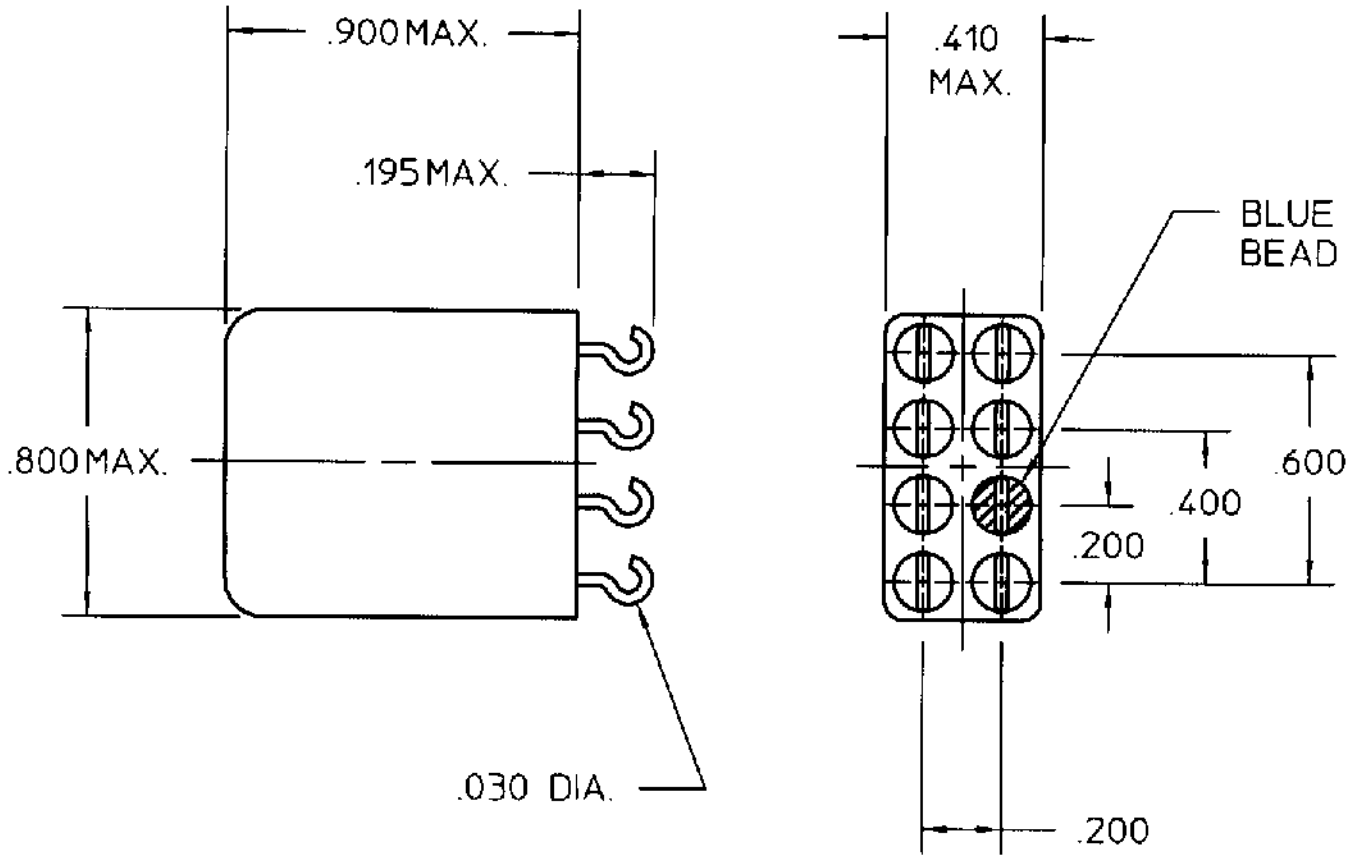


REV. 0

DCO 15769

COIL: @ 25°C

RESISTANCE	600 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6.0 MS MAX

RELEASE 4 MS MAX

CONTACT BOUNCE 3.0 MS MAX

CUSTOMER DATA SHEET

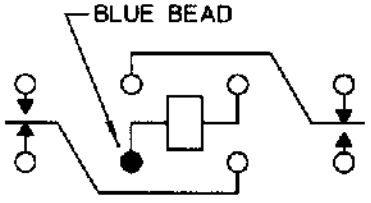

TERMINAL VIEW

CONTACT RATING: 5 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. B.D. 8/5/99 CK. GaM 8/5/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. HI-G

CUST. NO. 2BN-1A-126 REV.

FW5A RELAY

FW5A1101S06

SUPERSEDED
NOT the LATEST REVISION