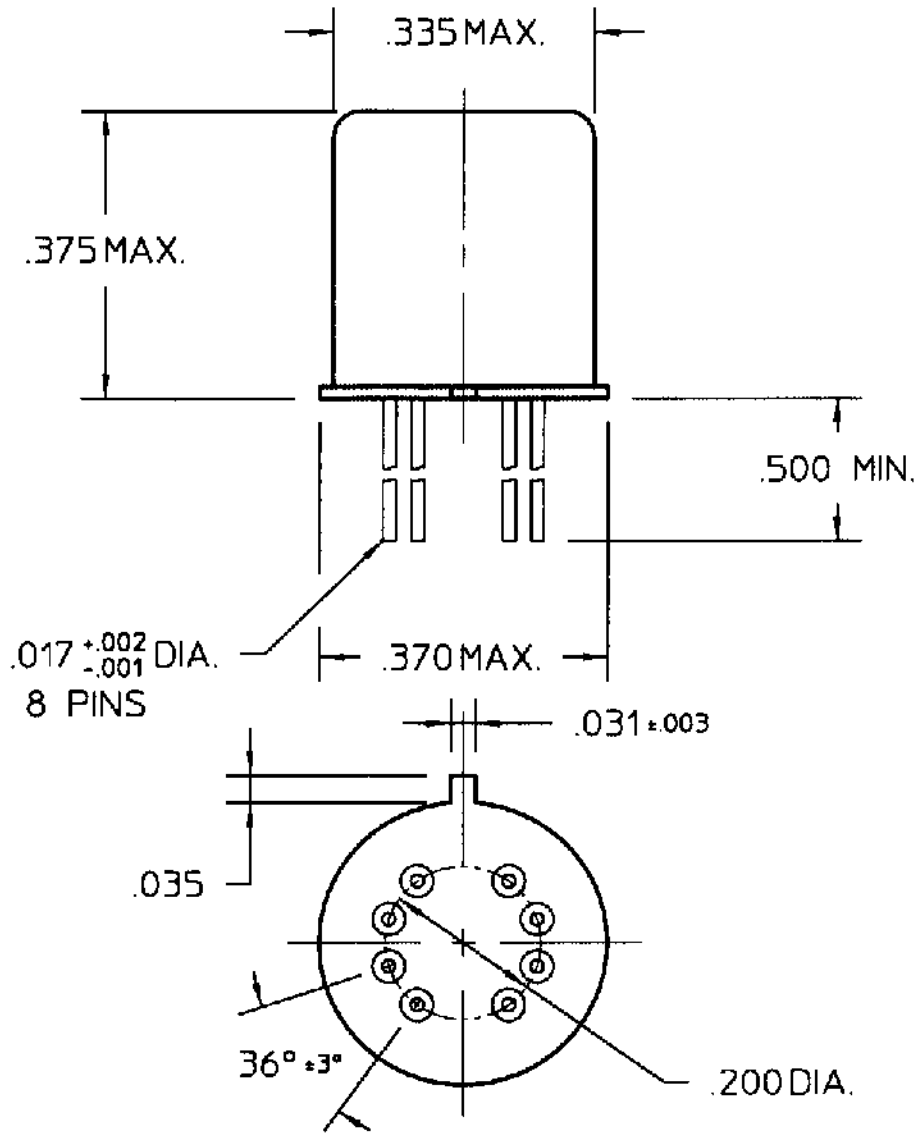



COIL: @ 25°C

| | |
|---|---|
| RESISTANCE | 850 OHMS ± 10% |
| NOMINAL VOLTAGE | 12.0 VDC |
| MUST OPERATE | 7.0 VDC |
| MUST RELEASE | 4.0 VDC MAX, 0.64 VDC MIN. |

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4 MS MAX
RELEASE TIME 2.0 MS MAX
CONTACT BOUNCE 1.5 MS MAX

# CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/7/97 CK. 8/7/97

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/11-035L

TYPE "JMS" RELAY

# JMSC-12XL