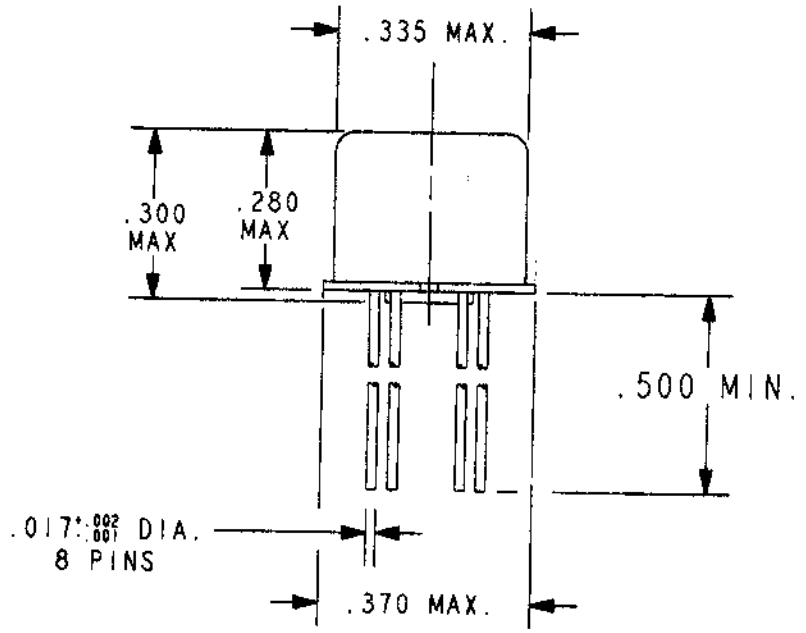
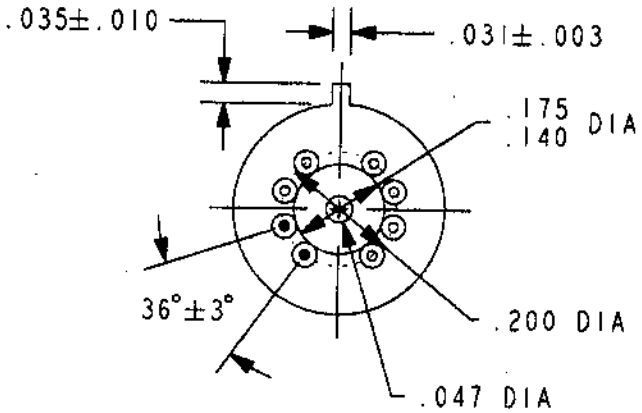



REV. 0
DCO 143283

COIL: @ 25°C

| | |
|---|---|
| RESISTANCE | 220 OHMS ±10% |
| NOMINAL VOLTAGE | 9.0 VDC |
| MUST OPERATE | 5.3 VDC |
| MUST RELEASE | 0.54 VDC |

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 1.5 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 10/25/01 CK 10/25/01

CII Technologies™
advanced control electronic solutions

CUST. CII
CUST. NO. STANDARD REV.

"MA" RELAY

MAC-9W

F-718 REV. 3