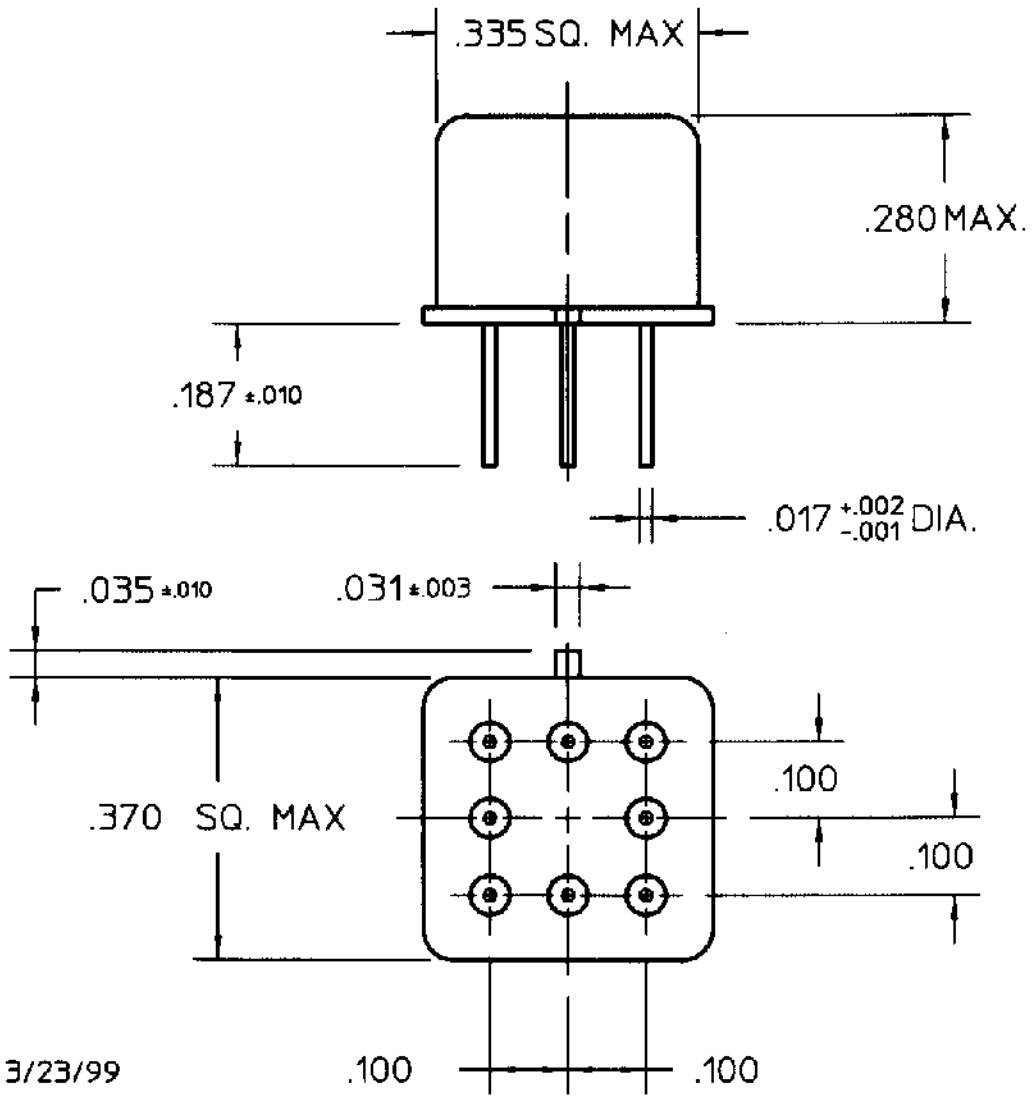


REV. 1 3/23/99
DCO 140960

COIL: @ 25°C

RESISTANCE	1560 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
MUST RELEASE	1.37 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 1.5 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/16/97 CK. JERRY C 3-23-99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I. STD.
CUST. NO.

TYPE "MGA" RELAY

MGAP-26