1883500-2 ✔ ACTIVE


AMPLIMITE

TE Internal #: 1883500-2

62 Position D-Shaped Connector, Plug, Cable-to-Cable, Board Mount, Shell Size 4, 2.29 mm [.09 in] Centerline, Printed Circuit Board, Signal

View on TE.com >

Connectors > D-Shaped Connectors

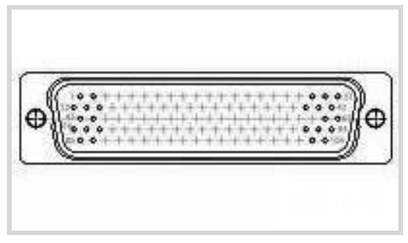

Number of Positions: **62**

Connector & Housing Type: **Plug**

Connector System: **Cable-to-Cable**

Connector Mounting Type: **Board Mount**

Connector Shell Size: **4**

Features

Product Type Features

Sealable	No
Connector & Housing Type	Plug
Connector System	Cable-to-Cable
Connector Shell Size	4
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Power/Signal/Coax Combination	No
Number of Positions	62
PCB Mount Orientation	Vertical

Body Features

Front Shell Material	Aluminum Alloy
D-Sub Connector Insert Arrangement	MS18276-2

Contact Features

Contact Size	Size 22
Contact Type	Pin
Contact Current Rating (Max)	5 A
Contact Options	Installed

Termination Features

Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Diameter	.46 mm[.018 in]
Termination Post & Tail Length	4.45 mm[.175 in]

Mechanical Attachment

Mating Alignment Type	Blindmate
Mating Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	2.29 mm[.09 in]

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Signal

Packaging Features

Packaging Method	Package

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Pb (3.7% in 74019790) **Article Safe Usage Statements:** Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Customers Also Bought



TE Part #3-102898-4
02 MODII HDR SRST UNSHRD A/PIN

Documents

Product Drawings

BLINDMATE PLUG SZ 4

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1883500-2_G_c-1883500-2-g.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1883500-2_G_c-1883500-2-g.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1883500-2_G_c-1883500-2-g.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.