1892787-6 ✔ ACTIVE

MINIPAK

TE Internal #: 1892787-6

PCB Mount Receptacle, Vertical, Board-to-Board, 35 Position, 2 mm / 2.75 mm [.079 in / .108 in] Centerline, Fully Shrouded, Gold (Au)

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: **PCB Mount Receptacle**

Connector System: **Board-to-Board**

Number of Positions: **35**

Number of Rows: **5**

Centerline (Pitch): **2 mm, 2.75 mm [.079 in, .108 in]**

Features

Product Type Features

Mixed & Hybrid Header	Yes
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Loaded Positions	35
Number of Positions	35
Number of Rows	5
PCB Mount Orientation	Vertical
Board-to-Board Configuration	Parallel, Perpendicular
Number of Power Positions	10
Number of Signal Positions	25

Electrical Characteristics

Operating Voltage	60 VDC

Body Features

Primary Product Color	Black

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]
PCB Contact Termination Area Plating Material Thickness	.5 µm[20 µin]
Contact Shape & Form	Single Beam
Contact Layout	Matrix
Contact Base Material	Copper Alloy, Phosphor Bronze
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Receptacle
Contact Current Rating (Max)	17 A
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.08 – .762 µm[3.15 – 30 µin]

Termination Features

Termination Post & Tail Length	3.3 mm[.13 in]
Termination Method to PCB	Through Hole - Press-Fit, Through Hole - Solder

Mechanical Attachment

PCB Mount Retention Type	Screw Mount
PCB Mount Alignment Type	Screw Mount
Mating Alignment Type	Passive Guide
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With

Housing Features

Centerline (Pitch)	2 mm, 2.75 mm[.079 in][.108 in]
Housing Material	LCP GF

Dimensions

Connector Width	11.86 mm[.467 in]
Connector Height	26.33 mm[1.037 in]
Connector Length	51.74 mm[2.037 in]

Row-to-Row Spacing	1.5 mm, 2 mm[.06 in][.079 in]
PCB Thickness (Recommended)	1.4 – 2.62 mm[.055 – .103 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Circuit Application	Power & Signal

Industry Standards

Compatible With Agency/Standards Products	CSA
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	24
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these


limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

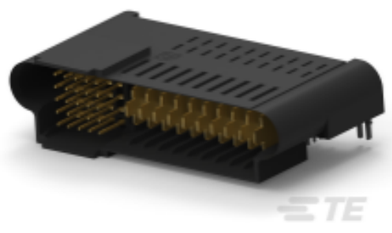


TE Part # 2-1926730-5
AssyMINIPAKHDL25a10pRAplugBdlk


Customers Also Bought



TE Part #2-1775210-1
D-SUB 5.08mm,9 POS PLUG OVER 15 POS RCPT

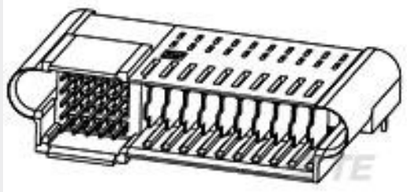

TE Part #2-1926730-5
AssyMINIPAKHDL25a10pRAplugBdlk

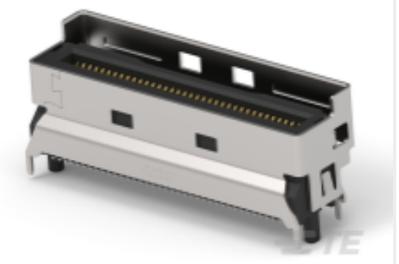

TE Part #2359366-5
MCIO INTERGRATED CONN, V/T,8X, SMT TYPE

TE Part #6-2383427-7
ASSY STRADDLE 168P 076 SLIVER WITH TAPE

TE Part #2395178-2
PCI EXP 2.3L 36 POS 15u" MYLAR



TE Part #2457376-1
MXIO SP

TE Part #2421577-4
ELCON MICRO M-PIC V HEADER, 12P12S

TE Part #2-2421619-5
ELCON MICRO,HEADER,VERTICAL DIP,

TE Part #2421900-4
ELCON MICRO M-PIC R/A HEADER, 12P12S

TE Part #2432269-2
ASSY STRADDLE 85Ohm 168P SLIVER2.0

Documents

Product Drawings

Assy Vert MINIPAK HDL Rcpt 25s

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1892787-6_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1892787-6_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1892787-6_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English