


© – TE Connectivity. All Rights Reserved.

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | G | REVISED PER ECO-19-013888 | 8-31-20 | CT | DM |

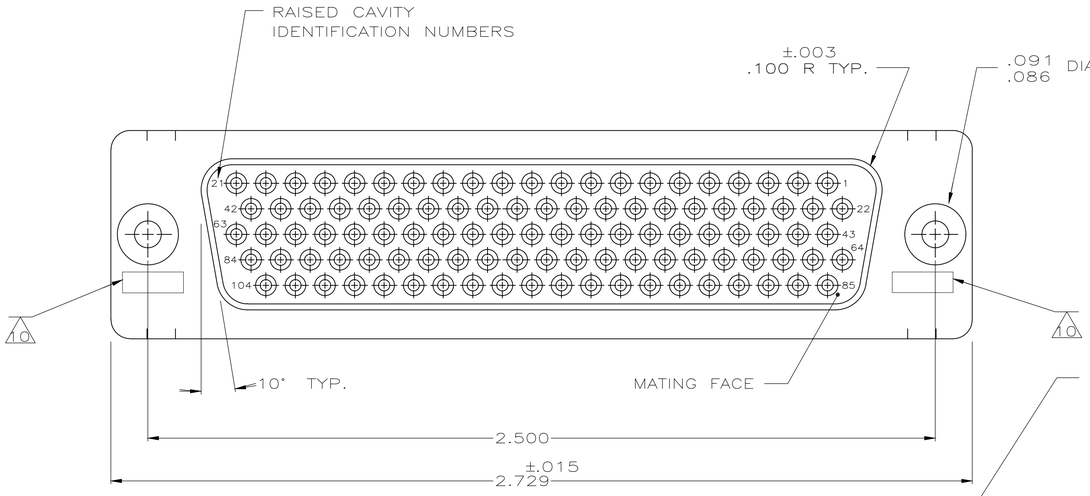


SOCKET CONTACT, SIZE 22, 104 REQD.
BODY-MATL: BERYLLIUM COPPER PER QQ-C-530
FINISH: PLATED GOLD .000050 MIN. THK.
PER MIL-G-45204 OVER NICKEL .000050 MIN.
THK. PER QQ-N-290
HOOD-MAT'L: STAINLESS STEEL PER QQ-S-766
FINISH: PASSIVATED PER QQ-P-35B

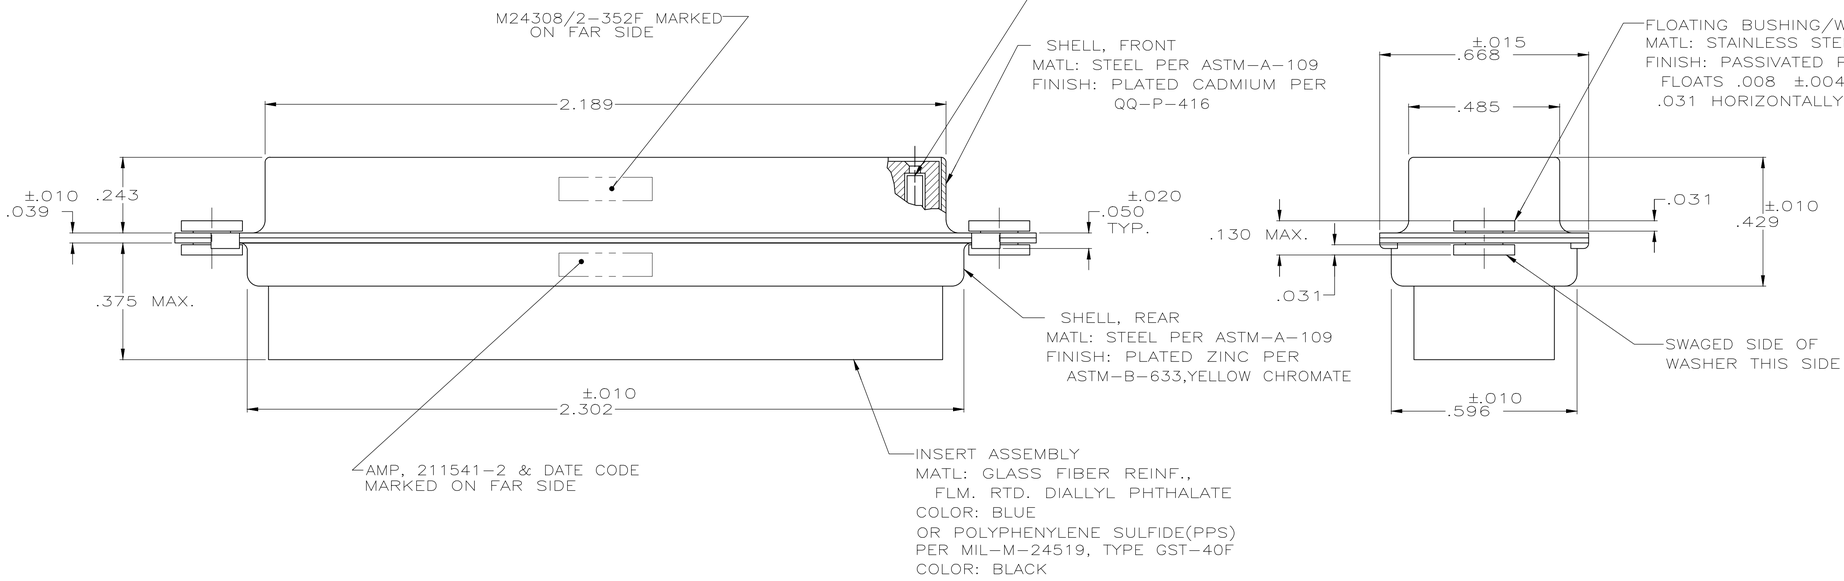


1. THIS RECEPTACLE WILL MATE WITH ANY 104 POSN.,SIZE 6 PLUG IN AMPLIMITE SERIES.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS RECEPTACLE IS .054 DIA.
3. SST RETENTION CLIPS ARE INCLUDED IN INSERTS.

4. PACKAGE STAMPED M24308/2-492F & AMP P/N 211541-1
5. PACKAGE STAMPED M24308/2-352F & AMP P/N 211541-2
6. PACKAGE STAMPED M24308/2-363F & AMP P/N 211541-3
7. AMP P/N 204351-1; MIL P/N 57-354, INCLUDED IN KIT
8. AMP P/N 91067-1; MIL P/N M81969/1-04
9. CONNECTOR SUPPLIED WITHOUT CONTACTS; SHOWN FOR ILLUSTRATION ONLY.
10. UL/CSA DESIGNATION STAMPED IN THIS AREA,OPTIONAL

| | | |
|---|---|---|
| SUPSD BY 204546-2 & 91067-1 | SAME AS -1 EXCEPT: 6 7 8 | 211541-3 |
| | SAME AS -1 EXCEPT: 5 7 | 211541-2 |
| | AS SHOWN 4 9 | 211541-1 |
| | DESCRIPTION | PART NO |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –.005
4 PLC ± –
ANGLES ± 0°30'

MATERIAL: SEE CALLOUT
FINISH: SEE CALLOUT

DWN D.ERDMAN 7/17/85
CHK R.GRZYBOWSKI 9-20-85
APVD L.ROPIER 9-20-85
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT 0.000000

TE Connectivity

NAME: RECEPTACLE ASS'Y.,AMPLIMITE, 104 POSN., SIZE 6, SERIES 90, W/DUAL FLOAT. BUSHING

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-211541 | — |

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV G

4805 (1/15)