2-160759-9 ✔ ACTIVE


Positive Lock | Mark I, Positive Lock 250

TE Internal #: 2-160759-9

Quick Disconnect Receptacle, Uninsulated, 20 – 15 AWG, .51 – 1.65 mm² Wire, 6.35 mm [.25 in] Tab Width, F-Crimp, Straight, Steel, Positive Lock 250

View on TE.com >

Terminals & Splices > Quick Disconnects

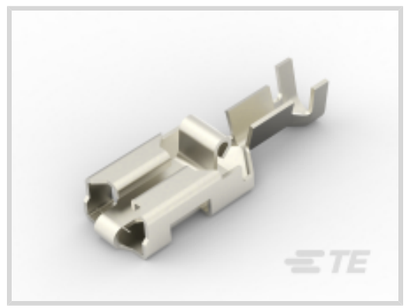





Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.51 – 1.65 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Steel
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple
Extraction Force	.7 – 10.2 kgf

Dimensions

Product Length	22.3 mm[.88 in]
Compatible Insulation Diameter Range	2.3 – 3.3 mm[.09 – .13 in]
Terminal Material Thickness	.41 mm[.016 in]
Wire Size	.51 – 1.65 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 250 °C[-40 – 482 °F]

Industry Standards

Compatible With Agency/Standards Products	UL

Packaging Features

Packaging Quantity	1500
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp



TE Part # 2836571-2
OCEAN_2.0_Applicator-S-090F130OV-RSA



TE Part # 2151182-2
OCEAN_2.0_APPLICATOR-S-090F130F-RSA

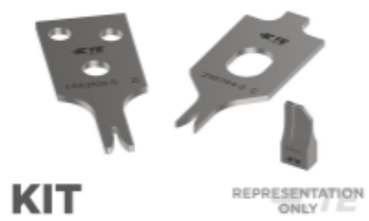

TE Part # 7-2151182-7
OCEAN_2.0_SPARE_PART_KIT-090F130F



TE Part # 654174-1
POS.LOCK HANDTOOL



TE Part # 5-2151182-2
OCEAN_2.0_APPLICATOR-S-090F130F-RSA



TE Part # 7-2836571-7
OCEAN_2.0_SPARE_PART_KIT-090F130OV


Also in the Series | Mark I




Automotive Headers(5)



Automotive Signal & Power Headers(5)

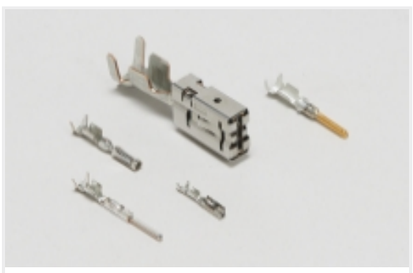

Automotive Terminals(1)

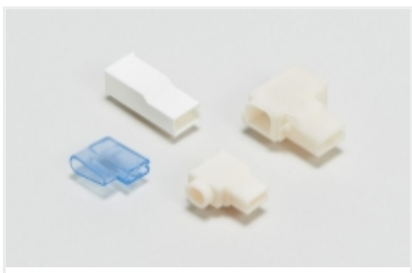

Crimp Terminal Housings(176)




Insertion & Extraction Tools(3)




Quick Disconnects(171)

Also in the Series | Positive Lock 250

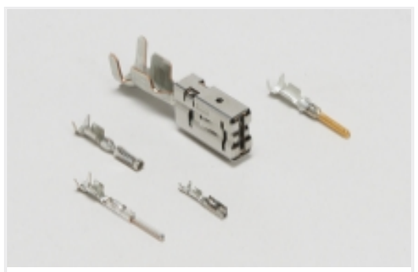

Automotive Terminals(1)

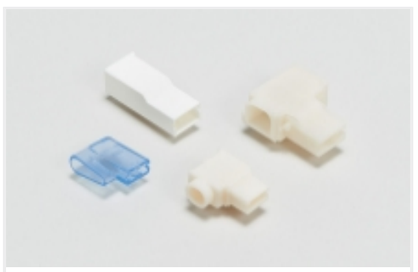

Crimp Terminal Housings(176)



Insertion & Extraction Tools(3)




Insulation Boots & Sleeves(5)



Quick Disconnects(171)

Customers Also Bought

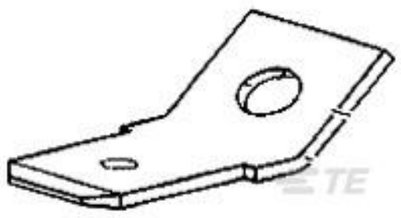

TE Part #42822-2
250 FASTON TAB TPBR



TE Part #144617-1
STD PW TIMER W/BARRIER



TE Part #7-180984-0
250 FASTON BOOT FLAG REC. 1P NATURAL



TE Part #CAT-104CST-RCPHS
Receptacle Housing: 2.54mm, 1 Row, CST-100 II



TE Part #2-1827864-0
DYNAMIC 1200D REC HSG 20P Y BLACK

TE Part #40-0207-000-P00
923 INSULATION INSERT, 6-PIN

TE Part #10-0715-002-P00
923 PLUG HOUSING IG3, SHORT

TE Part #2234991-1
HEATING ELEMENT ASSEMBLY

Documents

Product Drawings

POSITIVE LOCK 250 REC 0.5-1.5MM2 NISI

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-160759-9_AL.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-160759-9_AL.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-160759-9_AL.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

AMP positive lock MKI rec. terminal with latching device

Application Specification

EB**General Application Specification for Open Barrel Terminals

English

Application Specification

English

Agency Approvals

UL Report

English