

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	ECR-16-004548	20.NOV'15	CJ	HG

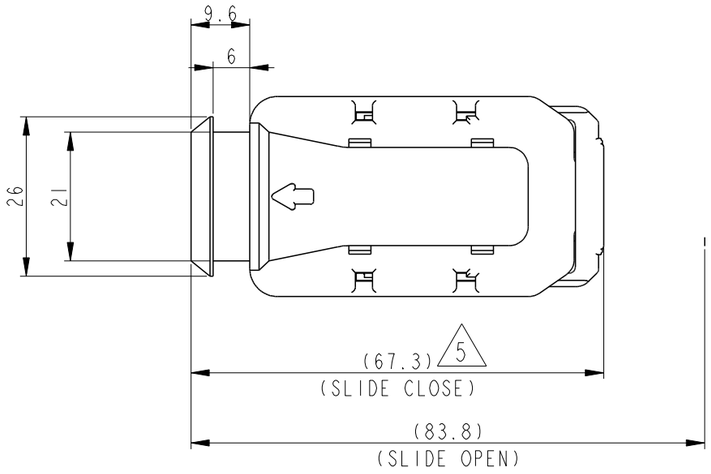


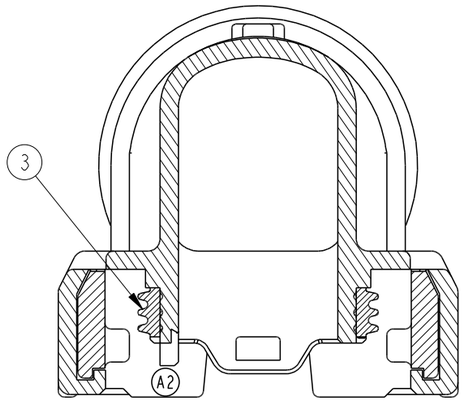



SECTION A-A
SCALE 2:1

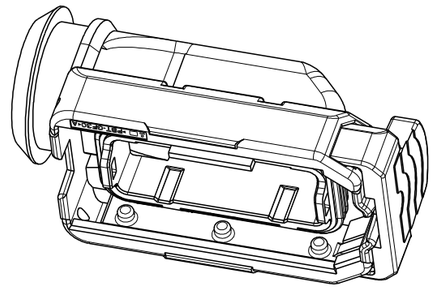


ISO VIEW



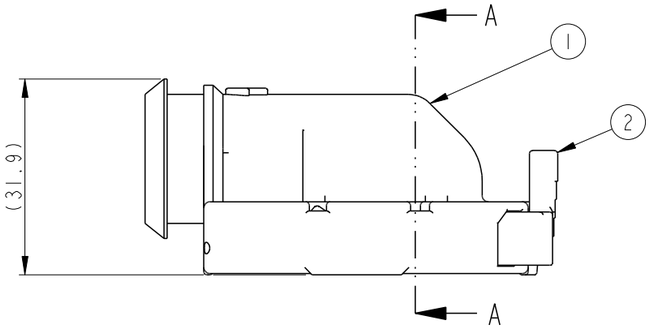



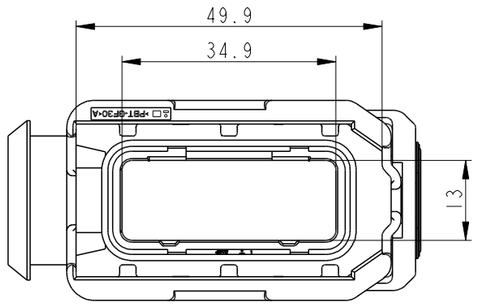

NOTE ;

1. GENERAL TOLERANCE : ±0.3, ±3.0°
2. APPLICABLE REC. CONTACT : SEE TABLE 1.
3. APPLICABLE CAP ASS'Y P/N : 2188786-2
4. APPLICABLE REC PLUG ASS'Y P/N : 2188792-2
5. SLIDE LEVER SUPPLY CONDITION : CLOSED.
6. 0.4 MAX.WARPAGE AND 0.2 MAX.FLASH ARE PERMISSIBLE.

NO	COLOR	MATERIAL	DESCRIPTION	Q'TY
3	ORANGE	SILICON	INNER SEAL	1
2	BLACK	PBT-GF30	SLIDE	1
1	BLACK	PBT-GF30	SPLUG HSG	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±0.5
2 PLC	±0.13
3 PLC	±0.013
4 PLC	±0.0001
ANGLES	±-

MATERIAL -
FINISH -

DWN	CJ CHOI
CHK	KT LIM
APVD	HG CHO
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-

TE Connectivity

NAME
-
SPLUG ASS'Y FOR HYB(025/060/110)
REAR DOOR 22P

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2188789	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV A2

2188789-2	REAR DOOR 22P SPLUG ASS'Y
ASS'Y P/N	DESCRIPTION