2-1969688-5 ✔ ACTIVE


Power Triple Lock



TE Internal #: 2-1969688-5

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 6 mm [.236 in] Centerline, Fully Shrouded, Pre-Tin, Through Hole - Solder, Power Triple Lock

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

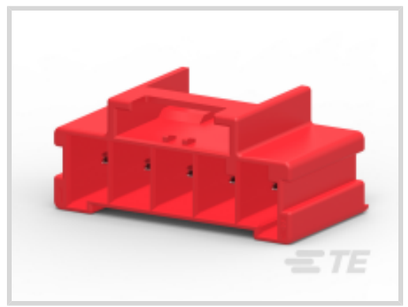

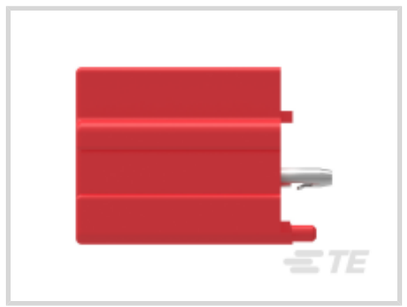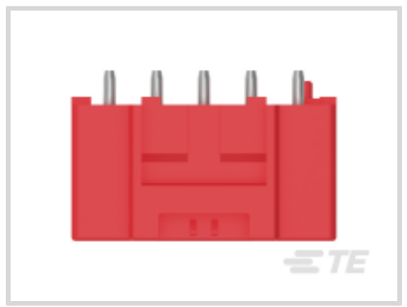
PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **5**

Centerline (Pitch): **6 mm [.236 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	5
Number of Loaded Positions	5
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	5

Number of Rows	1
Number of Power Positions	5

Electrical Characteristics

Operating Voltage	600 VDC

Body Features

Connector & Keying Code	B
Primary Product Color	Red

Contact Features

PCB Contact Termination Area Plating Material Finish	Bright
Contact Size	2.7mm
Mating Tab Width	2.7 mm[.106 in]
Contact Shape & Form	Rectangular
Contact Layout	Inline
Contact Base Material	Copper Alloy
Mating Tab Thickness	1.5 mm[.059 in]
Contact Mating Area Plating Material	Pre-Tin
Contact Mating Area Plating Material Finish	Bright
Contact Type	Pin
Contact Current Rating (Max)	17 A
PCB Contact Termination Area Plating Material	Pre-Tin

Termination Features

Termination Post & Tail Diameter	1.57 mm[.062 in]
Termination Post & Tail Length	3.33 mm[.131 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Latch Retainer
Mating Alignment Type	Keyed, Polarization
PCB Mount Alignment Type	Guide Pin
PCB Mount Alignment	With
Mating Retention	With
PCB Mount Retention	Without

Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	6 mm[.236 in]
Housing Material	Nylon

Dimensions

Connector Width	14.95 mm[.588 in]
PCB Thickness (Recommended)	1.58 mm[.062 in]
Connector Height	18.3 mm[.72 in]
Connector Length	33.7 mm[1.326 in]

Usage Conditions

Operating Temperature (Max)	150 °C[302 °F]
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]

Operation/Application

Circuit Application	Power

Industry Standards

Compatible With Agency/Standards Products	UL, VDE
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	GWT 850°C (Flame ≤ 30 sec)
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	72
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	

	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

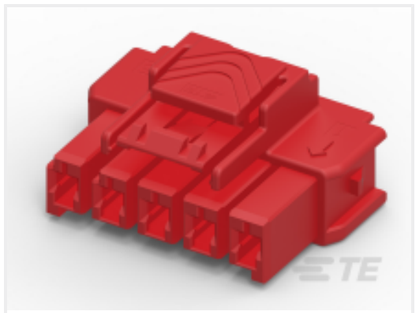


TE Part # 6-1971773-7
PTL 1X5 PLUG HSG HIGH TEMP KEY B RED


Also in the Series | Power Triple Lock



Connector Contacts(26)

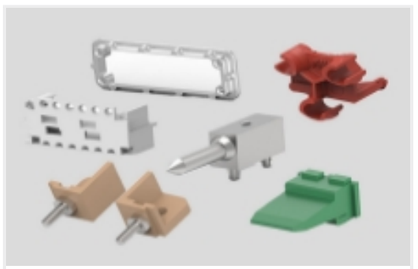

Connector Hardware(12)

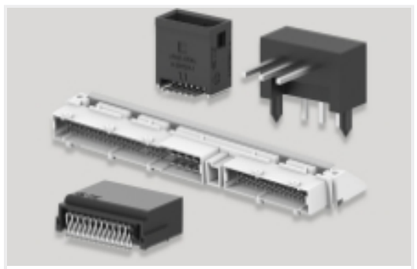

PCB Headers & Receptacles(21)




Power Contacts(26)



Rectangular Connector Housings(280)



Rectangular Power Connectors(301)

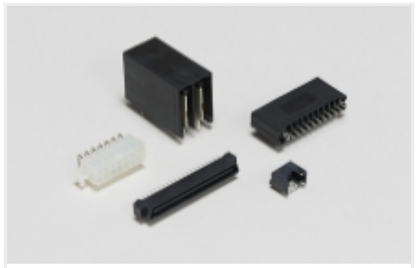

Standard Rectangular Connectors(280)

Customers Also Bought



TE Part #ASA158F12390235000
623 PLUG

TE Part #EC9833-000
ZHD-SCE-3.2-50-S1-4



TE Part #55992-1
TERMINAL,AMPOWER R 2/0 5/16



TE Part #1-1415543-5
RTE44110



TE Part #1614770-4
BDS 2 A 250 10R 10%



TE Part #YZ-KC-212751A-PY00
TOOL DISMOUNTING - FXP2



TE Part #ZPF000000000205378
CONTACT MALE ANG.90, CAL20, 120MM2 - FXP



TE Part #ZPF000000000205388
CONTACT FEMALE CAL.20, M12 - FXP



TE Part #ZPF000000000205373
PLUG MALE ANG.90 CAL.20 - FXP



TE Part #ZPF000000000136485
RECEPTACLE MALE FOR 12 PINS, CAL1,6

Documents

Product Drawings

PTL 1X5 PCB HEADER VERT HITEMP KEY B RED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1969688-5_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1969688-5_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1969688-5_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Agency Approvals

VDE Certificate

English

VDE Certificate

English