2-2326092-2 ✔ ACTIVE



Dynamic Series | Dynamic 5000 Series, Dynamic D-5200 Series



TE Internal #: 2-2326092-2

PCB Mount Header, Vertical, Wire-to-Board, 6 Position, 10.16 mm [.4 in] Centerline, Fully Shrouded, Gold (Au), Through Hole - Solder, Power, Hybrid

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > Header Assembly: Wire-to-Board, 20-45A, 250-630V

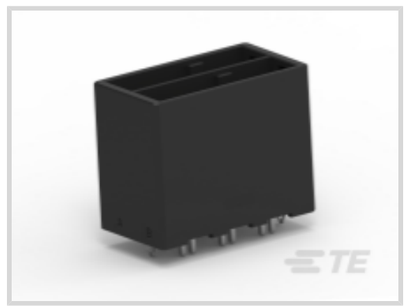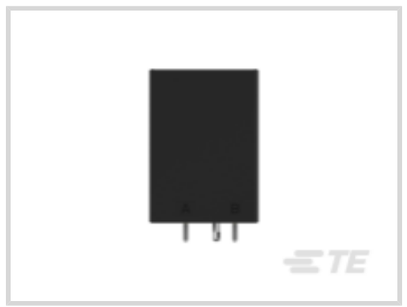PCB Connector Type: **PCB Mount Header**

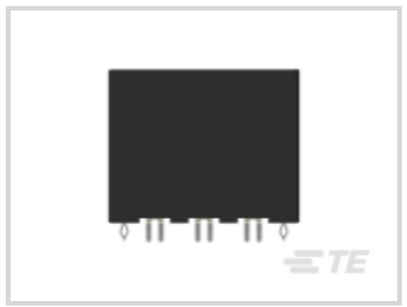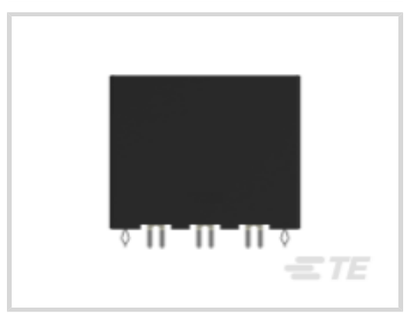PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **6**

Centerline (Pitch): **10.16 mm [.4 in]**

All Header Assembly: Wire-to-Board, 20-45A, 250-630V (59)

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	6
Number of Rows	2

Body Features

Primary Product Color	Black

Contact Features

Contact Underplating Material	Nickel
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold (Au)
Contact Mating Area Plating Material Thickness	.381 µm[15 µin]
Contact Type	Pin
Contact Current Rating (Max)	35 A
PCB Contact Termination Area Plating Material	Tin

Termination Features

Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

PCB Mount Retention Type	Retention Leg
Mating Alignment Type	Polarization
PCB Mount Alignment	Without
Mating Retention	With
PCB Mount Retention	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Centerline (Pitch)	10.16 mm[.4 in]
Housing Material	Thermoplastic GF

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Circuit Application	Power

Industry Standards

UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	11
Packaging Method	Box, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




TE Part # 2-179958-3
DYNAMIC D-5200S REC HSG 3P K/Y

Also in the Series | Dynamic 5000 Series



Connector Contacts(43)

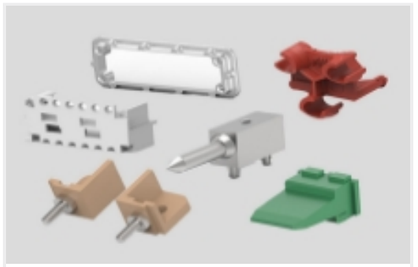

Connector Hardware(3)




Power Contacts(43)



Rectangular Connector Housings(1)



Rectangular Power Connectors(4)

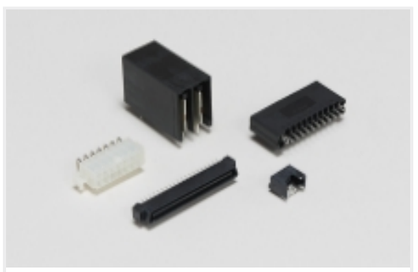


Standard Rectangular Connectors(1)




Wire-to-Board Connector Assemblies & Housings(31)

Also in the Series | Dynamic D-5200 Series

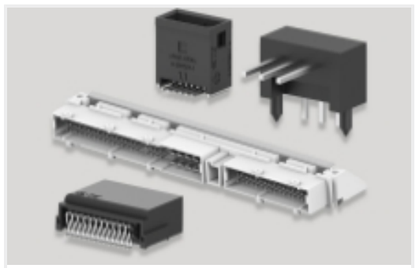


PCB Headers & Receptacles(3)

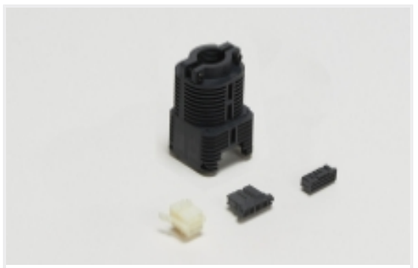


Rectangular Connector Housings(1)



Rectangular Power Connectors(4)

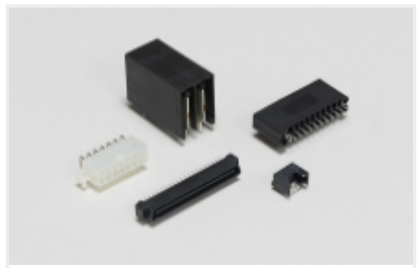

Standard Rectangular Connectors(1)

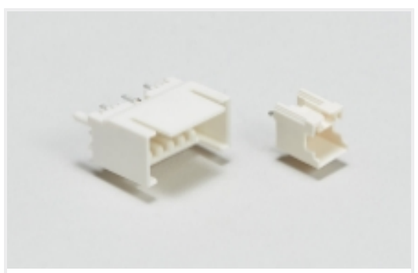

Wire-to-Board Headers & Receptacles (3)

Customers Also Bought



TE Part #2-1827872-0
DYNAMIC 1100D HDR ASSY V 40PY BLACK GOLD



TE Part #CAT-D9934-A15F
Header Assembly: Wire-to-Board, 5A, gold or tin plated



TE Part #1-2326092-2
DYNAMIC D-5 V-HDR ASSY 6P AU0.38 XX

Documents

Product Drawings

DYNAMIC D-5 V-HDR ASSY 6P AU0.38 YY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2326092-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2326092-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2326092-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English

Agency Approvals

TUV Certificate

English