280223-2 ✔ ACTIVE

FASTON | FASTON 375

TE Internal #: 280223-2

Quick Disconnect Receptacle, Uninsulated, 11 – 9 AWG, 4 – 6.63 mm² Wire, 9.53 mm [.375 in] Tab Width, F-Crimp, Straight, Brass, FASTON 375

View on TE.com >

Terminals & Splices > Quick Disconnects







Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **4 – 6.63 mm²**

Mating Tab Width: **9.53 mm [.375 in]**

Mating Tab Thickness: **1.22 mm [.048 in]**

Features

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	9.53 mm[.375 in]
Mating Tab Thickness	1.22 mm[.048 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	27.2 mm[1.07 in]
Compatible Insulation Diameter Range	3.81 – 5.08 mm[.15 – .2 in]
Terminal Material Thickness	.51 mm[.02 in]
Wire Size	4 – 6.63 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL

Packaging Features

Packaging Quantity	2000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

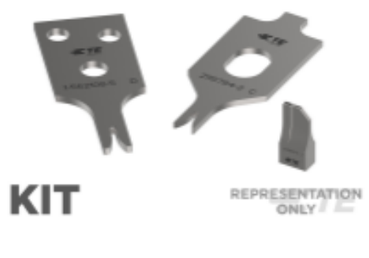


TE Part # 7-2150882-7
OCEAN_2.0_SPARE_PART_KIT-160F250F



TE Part # 2150882-2
OCEAN_2.0_Applicator-E-160F250F-REA

Also in the Series | FASTON 375

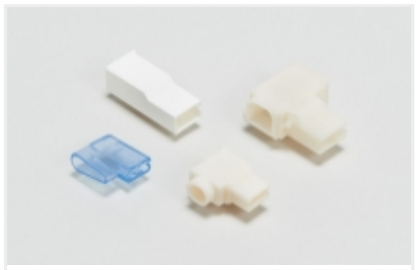

Crimp Terminal Housings(2)




PCB Terminals(1)



Quick Disconnects(10)

Customers Also Bought

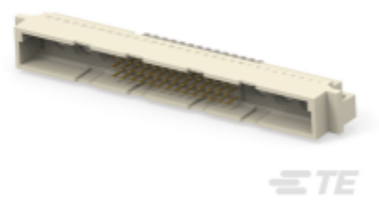

TE Part #374162-E
STVM 42-6 M ABC VVV 4-00 0606 * * 247 E0



TE Part #NB14634001
VERSAFIT-3X-1/2-0-SP



TE Part #150530-1
FASTON 375 AM REC 2-6MM2 0.2X1.062 BR



TE Part #151791-2
FASTON 375 REC FLAG 12-10 AWG TPBR LP




TE Part #2-644861-5
05P MTA100 SHRD HDR,W/O PEG SN



TE Part #927829-2
SPT REC 6.3 Contact SRC Sn



TE Part #4-1614893-1
CPF 0805 33K2 0.1% 25PPM 1K RL

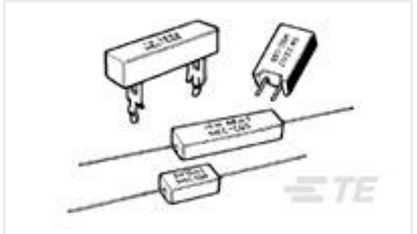

TE Part #1-1623779-6
SQB20 6R8 5% (WIRE)



TE Part #9-1879221-6
CPF 0603 16R5 0.1% 25PPM 1K RL



TE Part #2374900-2
GEMnet HDR, ASSY, 4P, 90deg,COD B

Documents

Product Drawings

FASTON 375 ASY REC 4-6MM2 0.5X27.0 TPBR

English

CAD Files

Customer View Model

ENG_CVM_CVM_280223-2_R.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_280223-2_R.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_280223-2_R.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

FASTON TERMINALS (INSULATED AND UNINSULATED) - FULL CATALOG

English

Product Specifications

Title not available for initial StarTEC data load

English

Application Specification

English