3-1827158-8 ✔ ACTIVE



TE Internal #: 3-1827158-8

PCB Mount Header, Vertical, Board-to-Board, 8 Position, 1.25 mm [.049 in] Centerline, Tin (Sn), Surface Mount, Signal, Black, Tape & Reel

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

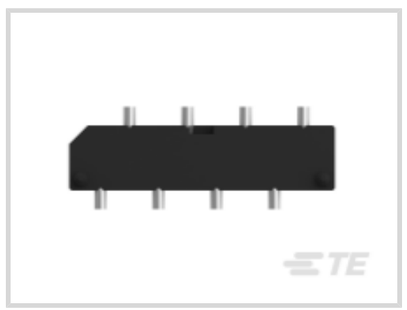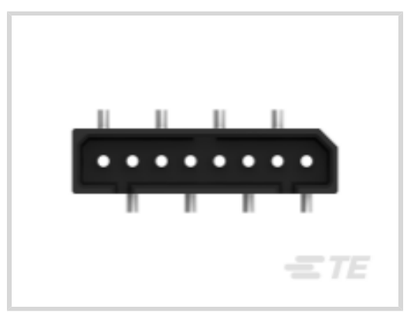

PCB Connector Type: **PCB Mount Header**

Connector System: **Board-to-Board**

Number of Positions: **8**

Number of Rows: **1**

Centerline (Pitch): **1.25 mm [.049 in]**

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Stackable	Yes
Number of Positions	8
Number of Rows	1
PCB Mount Orientation	Vertical
Board-to-Board Configuration	Parallel

Electrical Characteristics

Operating Voltage	50 VAC
Insulation Resistance	1 MΩ

Dielectric Withstanding Voltage (Max)	500 VAC

Body Features

Primary Product Color	Black

Contact Features

Mating Pin Diameter	.5 mm[.019 in]
PCB Contact Termination Area Plating Material Thickness	.8 µm[31.5 µin]
Contact Layout	Inline
Contact Base Material	Brass
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.8 µm[31.5 µin]
Contact Mating Area Plating Material	Tin (Sn)
Contact Type	Tab
Contact Current Rating (Max)	.5 A

Termination Features

Termination Post & Tail Diameter	.5 mm[.019 in]
Termination Method to PCB	Surface Mount

Mechanical Attachment

PCB Mount Alignment Type	Locating Posts
Mating Alignment Type	Polarization
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	1.25 mm[.049 in]
Housing Material	Polyphenylene Sulfide (PPS)

Dimensions

Stack Height	5 mm[.197 in]

Usage Conditions

Housing Temperature Rating	High
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Assembly Process Feature	Pick and Place Cover
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1400
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Reflow solder capable to 245°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

TE Part # 4-720998-5
COVER TAPE 21.5W

TE Part # 1533253-1
EMBOSS TAPE FOR 1.25FP

Customers Also Bought



TE Part #CAT-J41-DDRC
DEUTSCH DT Receptacle Connectors



TE Part #5728236001
CGPT-R-6.4-0



TE Part #1622517-1
LR1 1% 560R



TE Part #5-1622796-1
YR1 0.1% 249K




TE Part #7-1676915-9
YR1 0.1% 13K



TE Part #6-1676966-5
SMW2 47R 5%



TE Part #7-1879510-9
CRGH0805 1% 7K5 0.33W

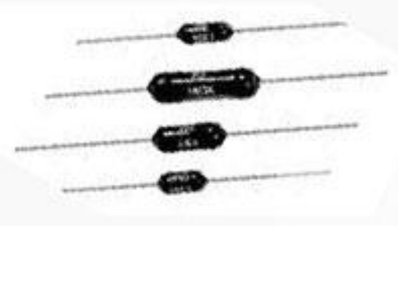

TE Part #1-1879666-2
H8 174K 0.1% 15PPM

TE Part #4376986001
DR-25-1/8-0-FAR-10M

Documents

Product Drawings

1.25FP,P08,SL,B,C,TR,5.00,5.80

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1827158-8_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1827158-8_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1827158-8_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

AMP 1.25mm F-P Connector (Board To Board)

Japanese

Product Specification

Japanese