41729-2 ✔ ACTIVE

FASTON | FASTON 250

TE Internal #: 41729-2

Quick Disconnect Receptacle, Uninsulated, 18 – 16 AWG, .82 – 1.31 mm² Wire, 6.35 mm [.25 in] Tab Width, F-Crimp, Straight, Brass, FASTON 250

View on TE.com >

Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 1.31 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple
Extraction Force	1.3 kgf

Dimensions

Product Length	20.45 mm[.805 in]
Compatible Insulation Diameter Range	3.05 – 3.7 mm[.12 – .146 in]
Terminal Material Thickness	.43 mm[.017 in]
Wire Size	.82 – 1.31 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL

Packaging Features

Packaging Quantity	500
Packaging Method	Loose Piece/Carton

Other

Line	Premier

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 61765-1
FASTON ADAPTER .250 RECEPTACLE BR



TE Part # 42025-4
250 FASTON REC 18-16 AWG TPBR



TE Part # 90165-1
DAHT 250 FASTON REC 18-14 ASSY



TE Part # 8-61765-1
FASTON,ADAPTER 250 HOUSING REC&TAB TPBR




TE Part # 575046-1
DAHT 250 FASTON 22-14 ASSY



TE Part # 2217483-2
KIT, BTLI, DOUBLE ACTION HEAD



TE Part # 2217483-1
KIT, BTLI, DOUBLE ACTION HEAD

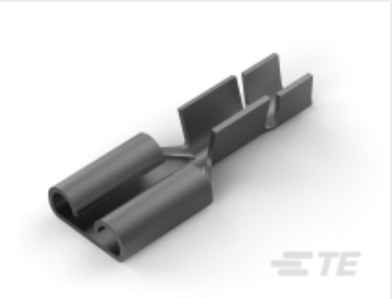

TE Part # 61873-1
250 FASTON REC 18-14 AWG TPBR



TE Part # 61810-2
FASTON .250 (6.3 MM) RECEPTACLE TPBR



TE Part # 5-160563-2
250 FASTON REC 18-16 AWG TPBR




TE Part # 2150003-2
OCEAN_2.0_APPLICATOR-E-120F180F-REA

Also in the Series | FASTON 250



Compression Connectors(4)

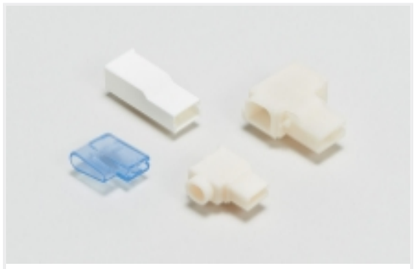


Crimp Terminal Housings(115)



Insertion & Extraction Tools(6)



Insulation Boots & Sleeves(16)

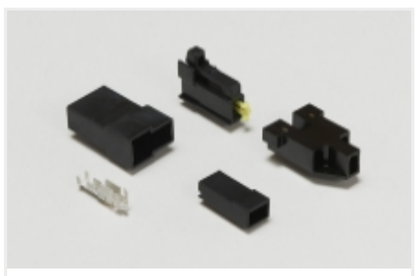

Magnet Wire Terminals(1)



PCB Terminals(133)



Quick Disconnects(417)




Splices(4)


Customers Also Bought




TE Part #2-84984-0
1mm FFC DIP V ASSY 20P NAT(TB)

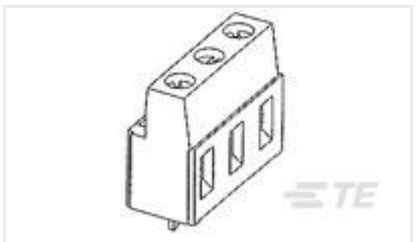

TE Part #282845-2
TERM-BLOK,PCB MNT,90DG,2P,7.62

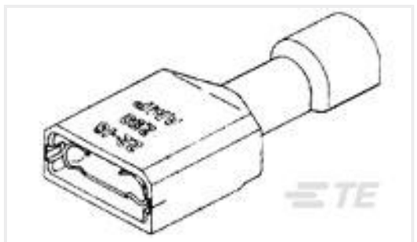

TE Part #2-520272-2
ULTRA-FAST .110/.125 ASY REC 22-18 TPBR

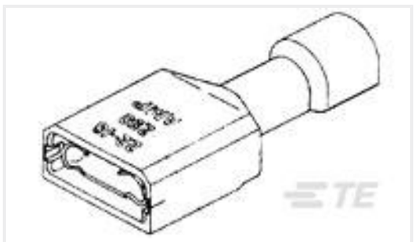

TE Part #3-520408-2
ULTRA-FAST 250 ASY REC 16-14 AWG TPBR



TE Part #CAT-104MTA-NTPNR
MTA Receptacle: Nylon, Tin Plated, 2.54 mm



TE Part #794227-1
MINI UMNL2 SOK 26-22 AWG SN LP



TE Part #1-826632-6
16P AMPMODU II STIFT LEI



TE Part #CAT-C339-SM1
SMD Power Resistor: 7 Watt, 200-2M Ohm

Documents

Product Drawings

250 FASTON REC 18-16 AWG TPBR

English

CAD Files

Customer View Model

ENG_CVM_CVM_41729-2_AK.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_41729-2_AK.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_41729-2_AK.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Engineering Report

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

Agency Approval Document

English