5-2110901-1 ✔ ACTIVE


STRADA

TE Internal #: 5-2110901-1

PCB Mount Receptacle, Vertical, Board-to-Board, 32 / 6 / 84 Position, 1.52 mm / 3.04 mm / 6.09 mm [.06 in / .12 in / .24 in] Centerline, Gold (Au)

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

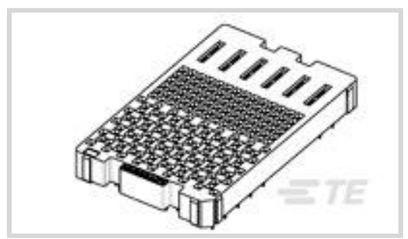

PCB Connector Type: **PCB Mount Receptacle**

Connector System: **Board-to-Board**

Number of Positions: **6, 32, 84, 193**

Centerline (Pitch): **1.52 mm, 3.04 mm, 6.09 mm [.06 in, .12 in, .24 in]**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

PCB Connector Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Pairs	32
Number of Loaded Positions	193
Stackable	No
Pairs per Column	8
Number of Positions	6, 32, 84, 193
PCB Mount Orientation	Vertical
Number of Power Positions	6
Number of Signal Positions	8

Electrical Characteristics

Impedance	100 Ω
Operating Voltage	6 VDC

Body Features

Primary Product Color	Black

Contact Features

PCB Contact Termination Area Plating Material Finish	Matte
Mating Tab Width	.69 mm, 4.5 mm[.027 in][.177 in]
PCB Contact Termination Area Plating Material Thickness	.5 – 2.54 µm[19.68 – 100 µin]
Contact Layout	Staggered
Contact Base Material	Copper Alloy
Mating Tab Thickness	.3 mm, .41 mm[.011 in][.015 in]
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Socket
Contact Current Rating (Max)	1.5 A
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.076 µm[3 µin]

Termination Features

Rectangular Termination Post & Tail Width	.43 mm, .74 mm[.016 in][.029 in]
Rectangular Termination Post & Tail Thickness	.15 mm, .2 mm[.005 in][.008 in]
Termination Post & Tail Length	2.05 mm[.08 in]
Termination Method to PCB	Through Hole - Press-Fit

Mechanical Attachment

Mating Retention	With
PCB Mount Alignment Type	Post Polarization
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	1.52 mm, 3.04 mm, 6.09 mm[.06 in][.12 in][.24 in]
Housing Material	Matte

Dimensions

Connector Height	4.49 mm[.176 in]
PCB Thickness (Recommended)	1.57 mm[.8 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]

Operation/Application

Circuit Application	Power & Signal

Industry Standards

UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	32
Packaging Method	Tray

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts




TE Part # 7-2110900-5
STRADA MESA,HD,ST,032,084,06,SN,N,25




TE Part # 9-2110900-0
STRADA MESA,HD,ST,032,084,06,SN,N,40

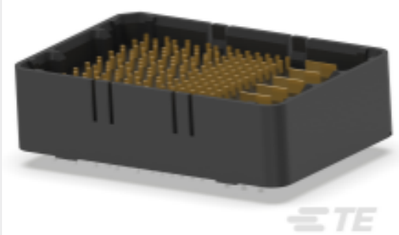

TE Part # 6-2110900-1
STRADA MESA,HD,ST,032,084,06,SN,N,11



TE Part # 7-2110900-3
STRADA MESA,HD,ST,032,084,06,SN,N,23



TE Part # 7-2110900-8
STRADA MESA,HD,ST,032,084,06,SN,N,28

Customers Also Bought



TE Part #114017-ZZ
SEALING PLUG, SIZE 12/16, WHT



TE Part #CAT-D48-ST273
DEUTSCH Solid Contacts




TE Part #CAT-D487-W416
Wedgelocks: DEUTSCH DT



TE Part #DT06-2S
PLG, 2P, GRY, N



TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #281934-2
SINGLE WIRE SEAL



TE Part #CAT-AM71-CH8172
AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING

Documents

Product Drawings

STRADA MESA,RC,ST,032,084,06,SN,N,NA

English

CAD Files

Customer View Model

ENG_CVM_CVM_5-2110901-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-2110901-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-2110901-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English