521307-1 SUPERSEDED


FASTON | FASTON 110

TE Internal #: 521307-1

TE Internal Description: 110 FASTON HSG. REC 3P NATURAL

View on TE.com >

Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings

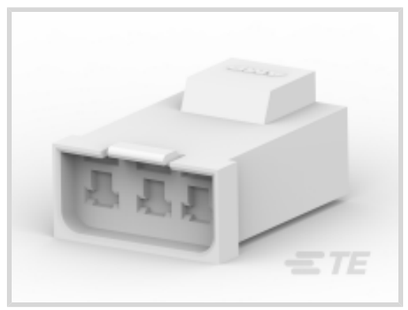





Terminal Type: **Receptacle**

Connector & Housing Type: **Receptacle**

Number of Positions: **3**

Terminal Orientation: **Straight**

UL Flammability Rating: **UL 94V-2**

Features

Product Type Features

Sealable	No
Connector & Housing Type	Receptacle

Configuration Features

Number of Positions	3

Body Features

Connector & Keying Code	B
Primary Product Color	Natural

Contact Features

Terminal Type	Receptacle
Terminal Orientation	Straight
Contact Mating Retention	With

Mechanical Attachment

Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Nylon
Centerline (Pitch)	5.08 mm, 5.97 mm[.2 in][.235 in]

Dimensions

Product Length	24.64 mm[.97 in]
Wire Size	18 AWG

Industry Standards

UL Flammability Rating	UL 94V-2

Packaging Features

Packaging Quantity	1
Packaging Method	Carton

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | FASTON 110

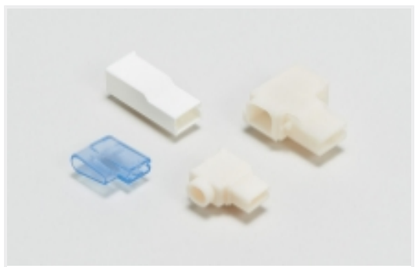

Crimp Terminal Housings(13)



Insertion & Extraction Tools(1)



PCB Terminals(22)



Quick Disconnects(164)

Customers Also Bought



TE Part #505874K049
VERSAFIT-1/4-0-1.5IN



TE Part #42801-1
187 FASTON REC 20-16 AWG BR



TE Part #63850-1
187 FASTON REC 20-16 AWG NPST



TE Part #2-521229-1
PL EXII & FASTON 250 HSG 2P NAT




TE Part #770069-1
02P .093 COMM P&S PLUG .248CL




TE Part #1217345-1
110 FASTON,REC.,16-18 AWG,BR



TE Part #CAT-P8704-P729A
Glow Wire Power Key Plug

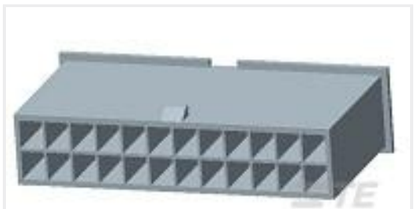

TE Part #2296206-8
8P FH PLUG VAL-U-LOK FH GWT/V0

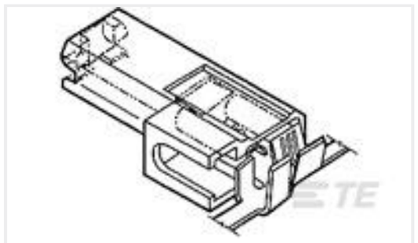

TE Part #521347-2
ULTRA-POD 250 ASY REC 18-14 TIN HARD BR

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_521307-1_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_521307-1_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_521307-1_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

FASTON Housings

English

Product Specifications

Product Specification

FASTON conn. terminal, rec. ctc. 2,8-4,8-6,0-6,3-9,6 mm.

Agency Approvals

UL Report

English