# 5555983-1 × OBSOLETE

CHAMP | CHAMP Docking Connectors

TE Internal #: 5555983-1

TE Internal Description: RCPT ASSY,36POS,SHLD,CHP-LTCH

IDC D-Sub: Receptacle Assembly, Signal, 2.16 mm

View on TE.com >

Connectors > D-Shaped Connectors > IDC D-Sub: Receptacle Assembly, Signal, 2.16 mm



Number of Positions: **36**

Connector & Housing Type: **Receptacle**

Connector System: **Cable-to-Panel**

Connector Mounting Type: **Panel Mount**

Centerline (Pitch): **2.16 mm [ .085 in ]**

All IDC D-Sub: Receptacle Assembly, Signal, 2.16 mm (10)

## Features

### Product Type Features

| | |
|---|---|
| Connector & Housing Type | Receptacle |
| Connector System | Cable-to-Panel |
| Connector Product Type | Connector Assembly |
| Connector & Contact Terminates To | Wire & Cable |

### Configuration Features

| | |
|---|---|
| Number of Positions | 36 |
| Number of Rows | 2 |
| Compatible With Wire & Cable Type | Ribbon Cable |

### Body Features

| | |
|---|---|
| Ribbon Cable Centerline Spacing | 1.27 mm[.05 in] |
| Primary Product Color | Black |
| Shield Plating Material | Nickel |
| Connector Profile | Standard |
| Cover Material | Polyphenylene Oxide |
| Shield Material | Die Cast Metal |

### Contact Features

| | |
|---|---|
| Contact Underplating Material | Palladium Nickel |

| | |
|---|---|
| Contact Mating Area Plating Material | Gold (Au) |
| Contact Base Material | Copper Alloy |
| Contact Mating Area Plating Material Thickness | .76 µm[30 µin] |
| Wire Contact Termination Area Plating Material | Gold Flash |
| Contact Current Rating (Max) | 1 A |
| Contact Options | Installed |

### Termination Features

| | |
|---|---|
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |

### Mechanical Attachment

| | |
|---|---|
| Mating Retention | With |
| Mating Retention Type | Bail Lock |
| Thread Size | 4-40 UNC 2B |
| Connector Mounting Type | Panel Mount |

### Housing Features

| | |
|---|---|
| Housing Material | Polyphenylene Oxide |
| Centerline (Pitch) | 2.16 mm[.085 in] |

### Dimensions

| | |
|---|---|
| Solid Wire Size | 30 – 26 AWG |
| Stranded Wire Size | .08 $mm^2$ |

### Usage Conditions

| | |
|---|---|
| Operating Temperature Range | -40 – 75 °C[-40 – 167 °F] |

### Operation/Application

| | |
|---|---|
| Shielded | Yes |
| Circuit Application | Signal |

### Packaging Features

| | |
|---|---|
| Packaging Method | Package |
| Packaging Quantity | 100 |

## Product Compliance

For compliance documentation, visit the product page on TE.com>

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |

| | |
|---|---|
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JAN 2025 (247)<br>SVHC > Threshold:<br>Triphenyl phosphate (TPP) (1% in 4993802)<br>**Article Safe Usage Statements:**<br>Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Not applicable for solder process capability |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## Also in the Series | CHAMP Docking Connectors



Connector Caps & Covers(27)

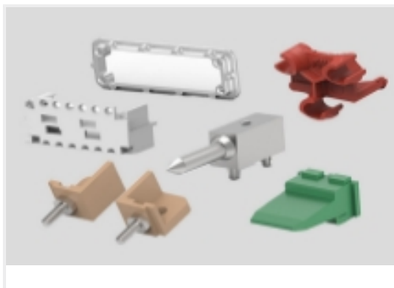

Connector Hardware(26)




Connector Strain Relief(2)



Docking Connectors(19)



IDC D-Sub Connectors(41)

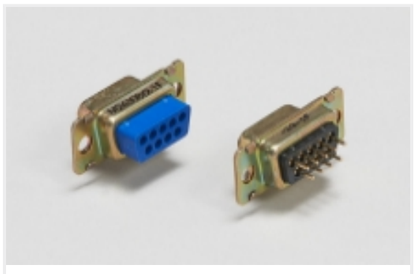


Panel Mount D-Sub Connectors(5)

## Customers Also Bought



TE Part #CONBNC002
BNC Jack 50 Ohm PCB Through Hole

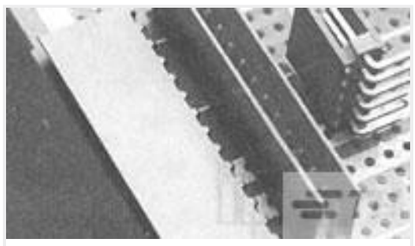

TE Part #281695-3
HEADER HE14 STRAIGHT 3 P



TE Part #3-643816-4
04P MTA100 CONN ASSY POL RIB




TE Part #7-968970-1
MCP2.8 GEH ASSY 6P



TE Part #3-1622796-5
YR1 0.1% 61K9



TE Part #1658621-8
34 NOVO MIL/CTR 15DP,LEAD FREE

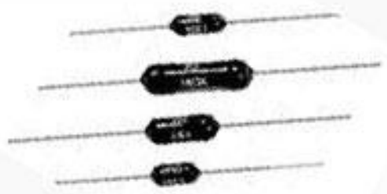


TE Part #6-1879664-5
H8 5K36 0.1% 15PPM



TE Part #5103308-7
A/L LOW PRO HDR 34P VERT BLACK



TE Part #6-5330808-5
SOCKET,MIN-SPR SN-AU SER-1

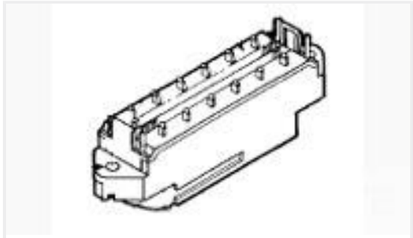

TE Part #554084-1
PLUG ASSY,36 POS,BAIL LOCK,LPF

## Documents

### Product Drawings

RCPT ASSY,36POS,SHLD,CHP-LTCH

English

### CAD Files

Customer View Model

ENG_CVM_CVM_5555983-1_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5555983-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5555983-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

### Product Specifications

## Application Specification

English