6-5535512-4 ✔ ACTIVE


AMPMODU | Modu Connector System

TE Internal #: 6-5535512-4

PCB Mount Receptacle, Horizontal / Right Angle, Board-to-Board, 10 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Modu Connector System

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

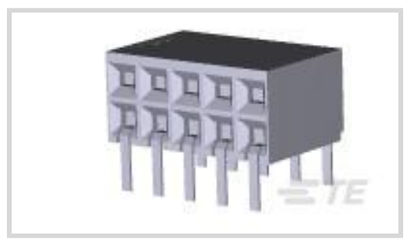

PCB Connector Type: **PCB Mount Receptacle**

Connector System: **Board-to-Board**

Number of Positions: **10**

Number of Rows: **2**

Centerline (Pitch): **2.54 mm [.1 in]**

Features

Product Type Features

Applied Pressure	High, Standard
PCB Connector Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Stackable	Yes
Number of Positions	10
Number of Rows	2
PCB Mount Orientation	Horizontal, Right Angle

Electrical Characteristics

Operating Voltage	333 VAC
Insulation Resistance	5000 MΩ

Body Features

Connector Profile	Standard
Primary Product Color	Black

Contact Features

Mating Square Post Dimension	.64 mm[.025 in]
PCB Contact Termination Area Plating Material Thickness	3.81 – 7.62 µm
Contact Shape & Form	Short Point
Contact Protection Type	Closed Entry Housing
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.762 µm[30 µin]
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Socket
Contact Current Rating (Max)	2 A

Termination Features

Rectangular Termination Post & Tail Width	.69 mm[.027 in]
Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Termination Post & Tail Length	2.92 mm[.115 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Connector Mounting Type	Board Mount
Mating Alignment	Without
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Mating Entry Location	Side
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Polyester GF

Dimensions

Connector Height	6.05 mm[.238 in]
Row-to-Row Spacing	2.54 mm, 7.87 mm[.31 in]
Stack Height	8.13 mm[.32 in]
PCB Thickness (Recommended)	1.4 – 2.4 mm[.055 – .094 in]

Usage Conditions

Housing Temperature Rating	High
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Solder Process Feature	Board Standoff
Circuit Application	Signal

Industry Standards

Compatible With Approved Standards Products	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	45
Packaging Method	Box, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 260°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



TE Part # 5-146130-4
10 MODII HDR DRST SFMNT B/A LF



TE Part # 5-146257-5
10P MODII HDR DRST B/A LF




TE Part # 5-146261-5
10 MODII HDR DRST B/A .100CL



TE Part # 86479-3
10 MODII HDR DRRA UNSHRD .100




TE Part # 87230-5
10 MODII HDR DRRA UNSHRD .100



TE Part # 87227-5
10 MODII HDR DRST UNSHRD .100




TE Part # 5-146269-5
10 MODII HDR DRST B/A 100 W/HD




TE Part # 87215-2
10 MODII HDR DRST UNSHRD .100


Also in the Series | Modu Connector System

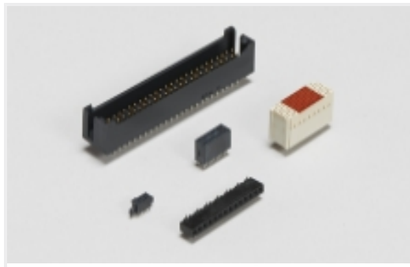


Board-to-Board Headers & Receptacles(235)

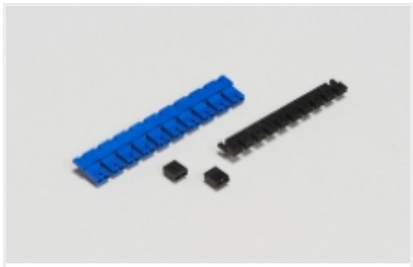

Board-to-Board Jumpers & Shunts(5)

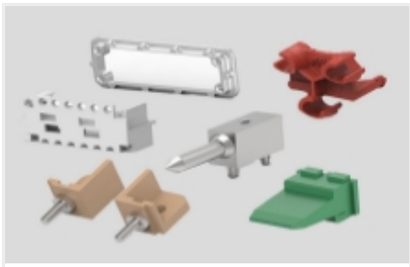

Connector Hardware(3)

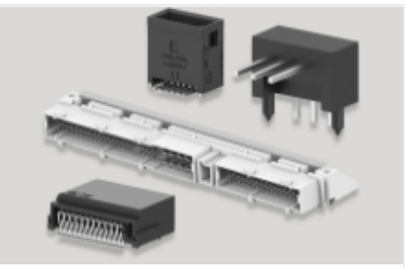


PCB Headers & Receptacles(235)

Customers Also Bought



TE Part #L9000256-01
RP-SMA Jack 50 Ohm .062 PCB Edge Mount

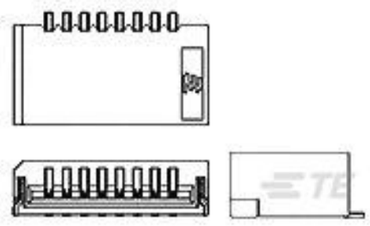

TE Part #1-84981-0
1MM FFC SMT H ASSY 10P EMBOSS



TE Part #5-534267-2
20 MODIV VRT DR DE 100/125



TE Part #5-534267-3
10 MODIV VRT DR DE 100/125



TE Part #4-794618-6
16P MICRO MNL ASSY R/A HDR LF




TE Part #2-1445055-4
MICRO MNL HDR ASSY S/ROW LF



TE Part #7-1614894-4
CPF0805 1M5 0.1% 25PPM 5K RL



TE Part #9-1879337-8
CPF 0603 25K5 1% 50PPM 1K RL

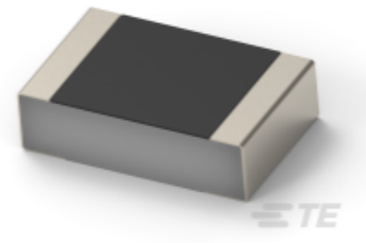

TE Part #4-2176452-9
CPF 0201 1K69 0.1% 25ppm 1K RL



TE Part #5499141-6
A/L UNIV HDR 26P RA LAT

Documents

Product Drawings

10 MODII HORZ DR CE EESS .100

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-5535512-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-5535512-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-5535512-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

AMPMODU_INTERCONNECTION_SYSTEM_SECTION5

English

Product Specifications

Application Specification

English