

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE ALL RIGHTS RESERVED.


| LOC | DIST |
|---|---|
| GP | 00 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | B | REV PER ECO-11-007678 | 18MAY2011 | RG | DO |
| | B1 | REVISED PER ECN-24-294057 | 18NOV2024 | AP | AL |
| | B2 | REVISED AS ECR-25-254801 | 28AUG2025 | PK | RGA |
| | | | | | |

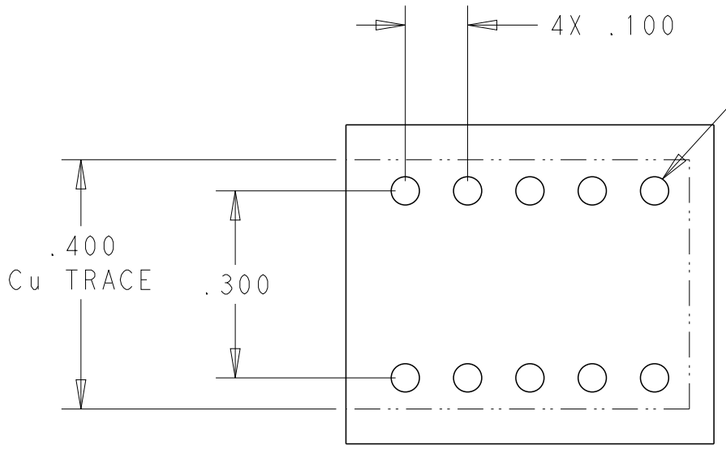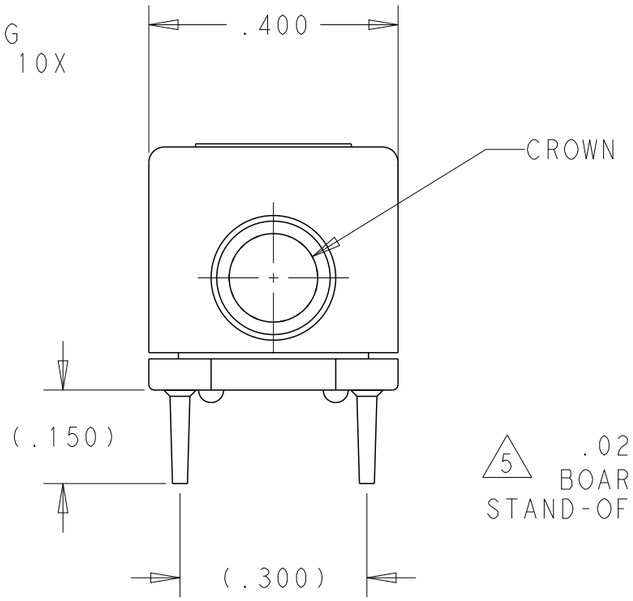


1. PART NUMBER CHANGES AND/OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TE APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING.

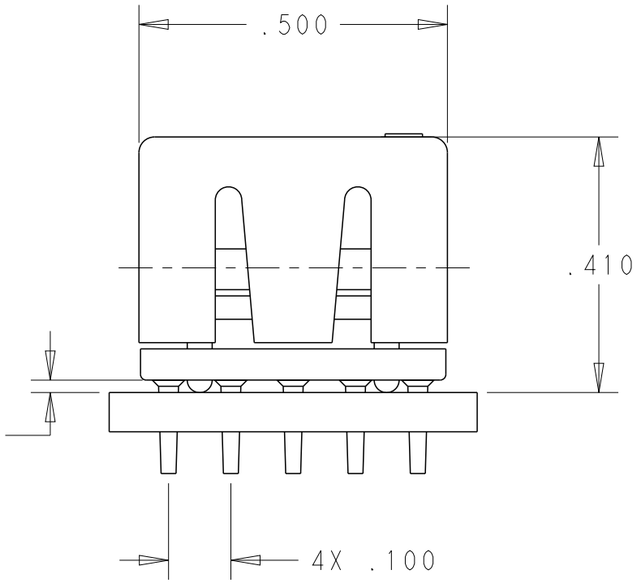2. ITEMS PROVIDED TO THIS SPECIFICATION SHALL BE IDENTIFIED ON CONTAINER WITH THE FOLLOWING INFORMATION, PART NUMBER AND DATE CODE OF MANUFACTURE.

3. MATERIAL:
   INSULATOR - POLYESTER, GLASS FILLED, UL94 V-O RATED, COLOR: BLACK
   MODULE - METAL CASTING
   CROWN - BeCu
   CONTACT - BRASS

4. FINISH:
   INSERT - SILVER PLATED .000200 MIN THK. OVER NICKEL .000040 MIN THK.
   CROWN - GOLD PLATED .000030 MIN THK. OVER NICKEL .000040 MIN THK.

5 A FIVE POUND (5lb) FORCES REQUIRED TO CORRECTLY SEAT THE CONNECTOR WITH PLATED THRU HOLES LESS THEN Ø.040.

6643232-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.020
4 PLC ±-
ANGLES ±.5

MATERIAL -
FINISH -

DWN 18MAY2011 LOVATO/GRZYBOWSKI
CHK - D.ORRIS
APVD 18MAY2011 CHAU/ORRIS
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME
ICCON SOCKET, PARALLEL
10 PIN FOOTPRINT, SOLDER STYLE
-

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C-6643232 | - |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV B2