

SSRM Series

45-65A DIN Mount Solid State Relay With Paired SCR Output, Integral Heatsink

cULusFile E29244

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to confirm the product meets the requirements for a given application.

Features

- DIN mount design with integral heatsink.
- Choice of 45, 55 or 65A rms inverse-parallel connected SCR output.
- 48 - 660VAC output.
- 4 -32VDC or 90 - 140Vrms input control.
- 4000V rms optical isolation.
- Green LED input status indicator.
- Finger-safe (IP20) screw clamp terminals for load and control.
- Ground terminal.

Engineering Data

Form: 1 Form A (SPST-NO).
Duty: Continuous.
Isolation: 4000V rms input-to-output-to-ground.
Insulation Resistance: 10^9 Ohms, minimum, at 500VDC.
Capacitance: 8.0 pf maximum (input to output).
Temperature Range:
Storage: –40°C to +125°C
Operating: –40°C to + 80°C
Case and Mounting: Refer to outline dimension drawing.
Termination:
Control: Finger safe (IP20) screw clamps accepting wire size up to #12 AWG (2.5 mm).
Load: Finger safe (IP20) screw clamps accepting wire size up to #8 AWG (3.8 mm).
Ground: #10 screw with 5/16 in. hex/slottted head.
Installation Spacing: Minimum 0.8 in (20 mm) space between units.
Approximate Weight: 16.9 oz. (479 g).

Ordering Information

Typical Part Number	SSRM	-600	A	55

1. Basic Series: SSRM = Solid State Relay with Integral Heatsink for DIN Rail Mounting

2. Line Voltage: 600 = 48 - 660 VAC

3. Input Type & Voltage: A = 90 - 140VAC
D = 4 - 32VDC

4. Maximum Switching Rating/Output: 45 = 45.0A rms
55 = 55.0A rms
65 = 65.0A rms

Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.

SSRM-600A45	SSRM-600A55	SSRM-600A65
SSRM-600D45	SSRM-600D55	SSRM-600D65

Input Specifications

Parameter	Conditions	AC Control Units	DC Control Units
Control Voltage Range V_{IN}	@ 25°C	90 - 140 Vrms	4.0 - 32 VDC
Reverse Voltage V_{IN} (Max.)	@ 25°C	—	32 VDC
Must Operate Voltage $V_{IN(OP)}$ (Min.)	@ 25°C	90 Vrms	4.0 VDC
Must Realease Voltage $V_{IN(REL)}$ (Min.)	@ 25°C	10 Vrms	1.0 VDC
Input Current (Typical)	@ 25°C	15 mA @ 120 Vrms	14 mA @ 5 VDC
Input Current (Max.)	@ 25°C	—	30 mA

01-2018, Rev. 0118
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.


SSRM Series (Continued)

Output Specifications (@ 25° C, unless otherwise specified)


Parameter	Conditions	Units	45A Rated Units	55A Rated Units	65A Rated Units
Load Voltage Range V_L	f = 47 - 63 Hz.	V rms	48 - 660	48 - 660	48 - 660
Repetitive Blocking Voltage (Min.)		V peak	±1200	±1200	±1200
Load Current Range I_L*		A rms	0.15 - 45.0	0.25 - 55.0	0.25 - 65.0
Single Cycle Surge Current (Min.)		A peak	625	1,000	1,200
Leakage Current (Off-State) (Max.)	f = 60 Hz. V_L = 600Vrms	mA rms	1.0	1.0	1.0
Thermal Resistance Junction to Case $R_{\theta J-C}$(Max.)		°C/W	0.63	0.31	0.28
On-State Voltage Drop (Max.)	I_L = Max.	V peak	1.7	1.7	1.7
Static dv/dt (Off-State) (Min.)	V_L = Max.	V/µs	500	500	500
Turn-On Time (Max.)	f = 60 Hz.	ms	8.3 for DC Input Models, 10.0 for AC Input Models		
Turn-Off Time (Max.)	f = 60 Hz.	ms	8.3 for DC Input Models, 40.0 for AC Input Models		
I^2t Rating (Max.)	t = 8.3 ms	A^2 Sec.	1,620	4,150	6,000
Load Power Factor Rating (Min.)	I_L = Max.		0.5	0.5	0.5

*See Thermal Derating Curves.

Electrical Characteristics (Thermal Derating Curves)

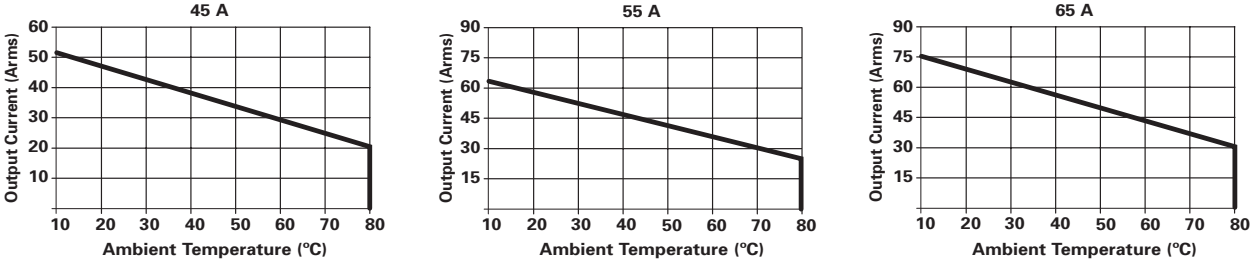

Outline Dimensions

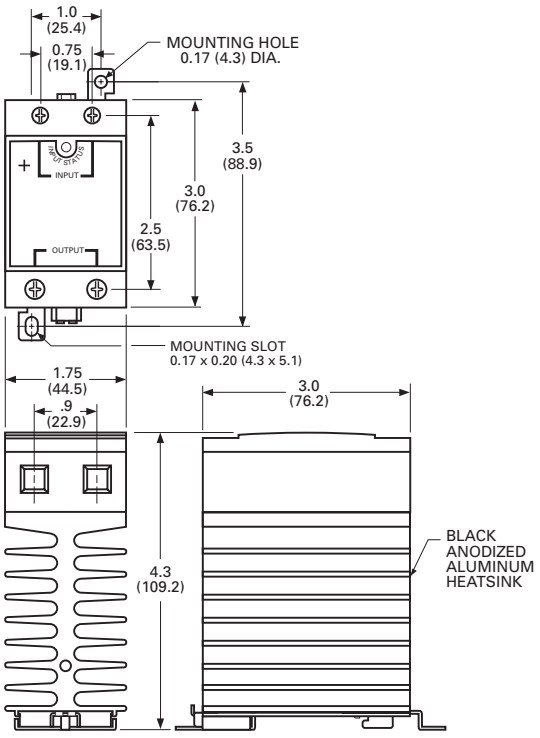

Recommended Torque Range for Terminal Screws:
Control: 5 - 6 in lb (0.6 - 0.7 Nm).
Output: 10 - 15 in lb (1.1 - 1.7 Nm).

01-2018, Rev. 0118
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.