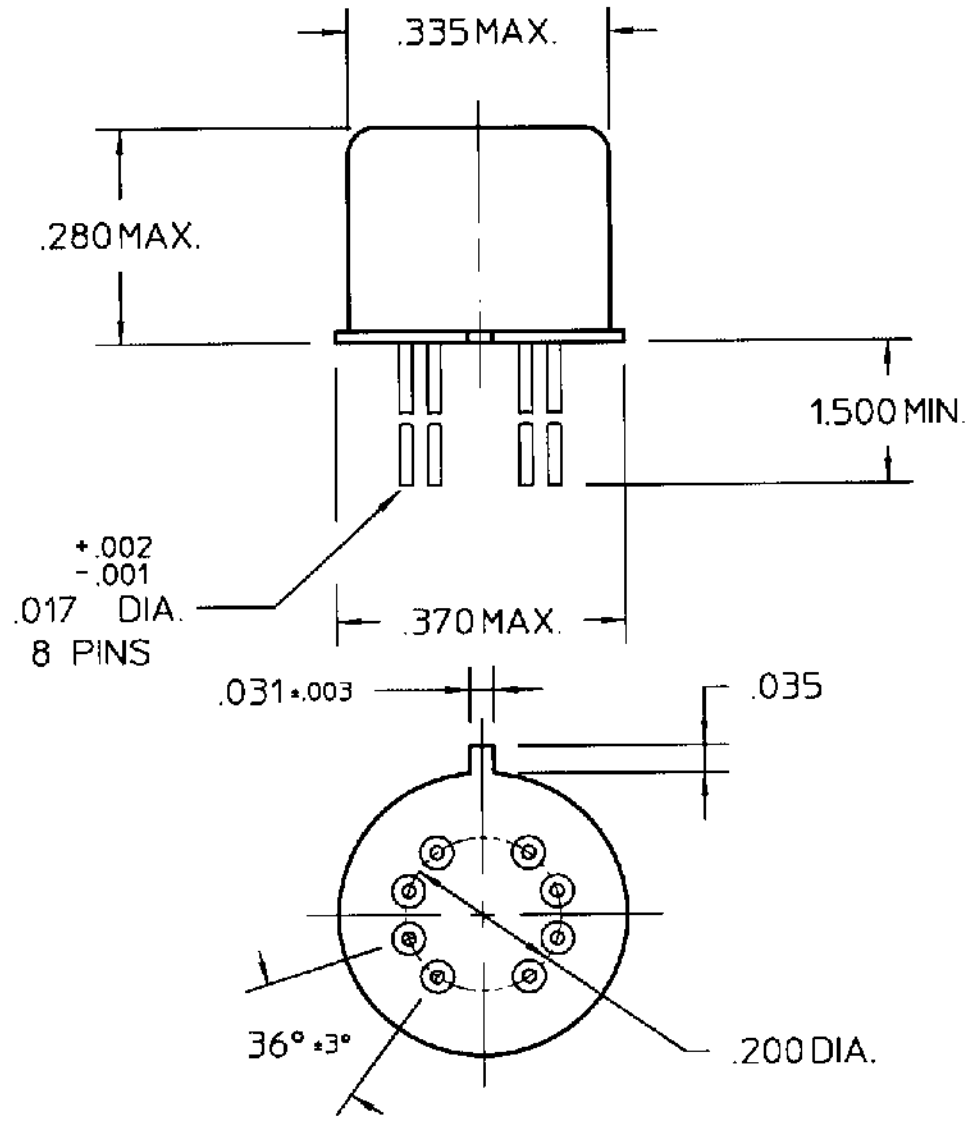


COIL: @ 25°C

RESISTANCE	98 OHMS ± 10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.5 VDC
MUST RELEASE	2.0 VDC MAX, 0.28 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2 MS MAX
RELEASE TIME 4 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUST. QPL
CUST. NO. M39016/15-029L

TYPE JMAD RELAY

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 3/6/97 CK. 3/6/97

COMMUNICATIONS INSTRUMENTS, INC.

JMAWD-6XL