8-324001-1 ✔ ACTIVE

SOLISTRAND

TE Internal #: 8-324001-1

Butt Splice, 24 – 20 AWG, .2 – .6 mm² Wire, 320 – 1290 CMA, Uninsulated, Serrated, Copper, 12.45 mm [.49 in] Length, Loose Piece, Closed Barrel

View on TE.com >

Terminals & Splices > Splices







Splice Type: **Butt Splice**

Wire Size: **.2 – .6 mm²**

Sealable: **No**

Splice Features: **Serrated**

Features

Product Type Features

Splice Accessory Type	Splice
Splice Type	Butt Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire

Body Features

Product Weight	.332 g
Splice Features	Serrated

Contact Features

Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed

Mechanical Attachment

Wire Insulation Support	Without

Dimensions

Outside Diameter	2.67 mm[.105 in]
Wire Size	320 – 1290 CMA
Barrel Inside Diameter	1.09 mm[.043 in]
Terminal Material Thickness	.6 mm[.024 in]
Product Length	12.45 mm[.49 in]

Usage Conditions

Insulation Option	Uninsulated

Operation/Application

Compatible With Wire Base Material	Copper

Industry Standards

Government Qualified Splice	No

Packaging Features

Packaging Quantity	100
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




TE Part # 69363
DAHT STRATO SOLIS 26-20 ASSY

Customers Also Bought



TE Part #HDP26-24-47PE
PLG, 47P, BLK, E, 16/20, P



TE Part #32463
SPLICE BUTT STRAP 22-16




TE Part #34319-1
SOLIS, PARA 6 60/40 SN-PB




TE Part #170360-1
UNIV M-N-L PIN 22-18 AWG




TE Part #175778-3
CT.CRIMP REC HSG 3P

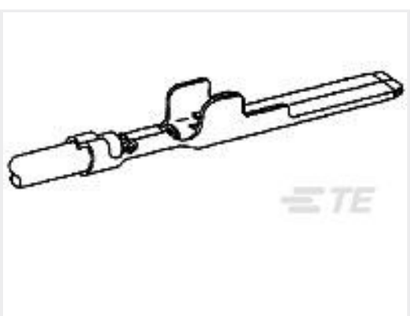


TE Part #1-179321-2
HYBRID MINI DRWER TAB CONT.




TE Part #796636-2
2POS 5.08MM CE VRT HDR,TRM BLK



TE Part #796636-4
4POS 5.08MM CE VRT HDR,TRM BLK

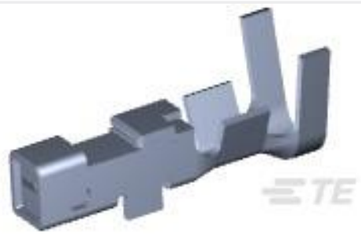

TE Part #1747063-1
GRACE INERTIA CONN 2.5 REC CON

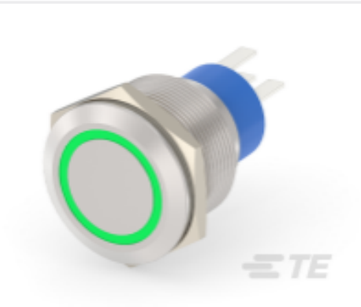

TE Part #3-2213772-5
AV22 SPL 3A MOVE RING LED GREEN 24V

Documents

Product Drawings

SPLICE,SOLIS BUTT STRAP 24-20

English

CAD Files

Customer View Model

ENG_CVM_8-324001-1_G.3d_igs.zip

English

Customer View Model

ENG_CVM_8-324001-1_G.3d_stp.zip

English

Customer View Model

ENG_CVM_8-324001-1_G.2d_dxf.zip

English

3D PDF

3D

3D PDF

3D

Customer View Model

ENG_CVM_CVM_8-324001-1_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_8-324001-1_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-324001-1_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

SOLISTRAND - QRG

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English