THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.


LOC	DIST
G	14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REV & REDRAW / 0720-0777-95	28SEP95	ME	NB

AMP
WIRE RANGE

16-14 AWG
SOLID OR STRANDED

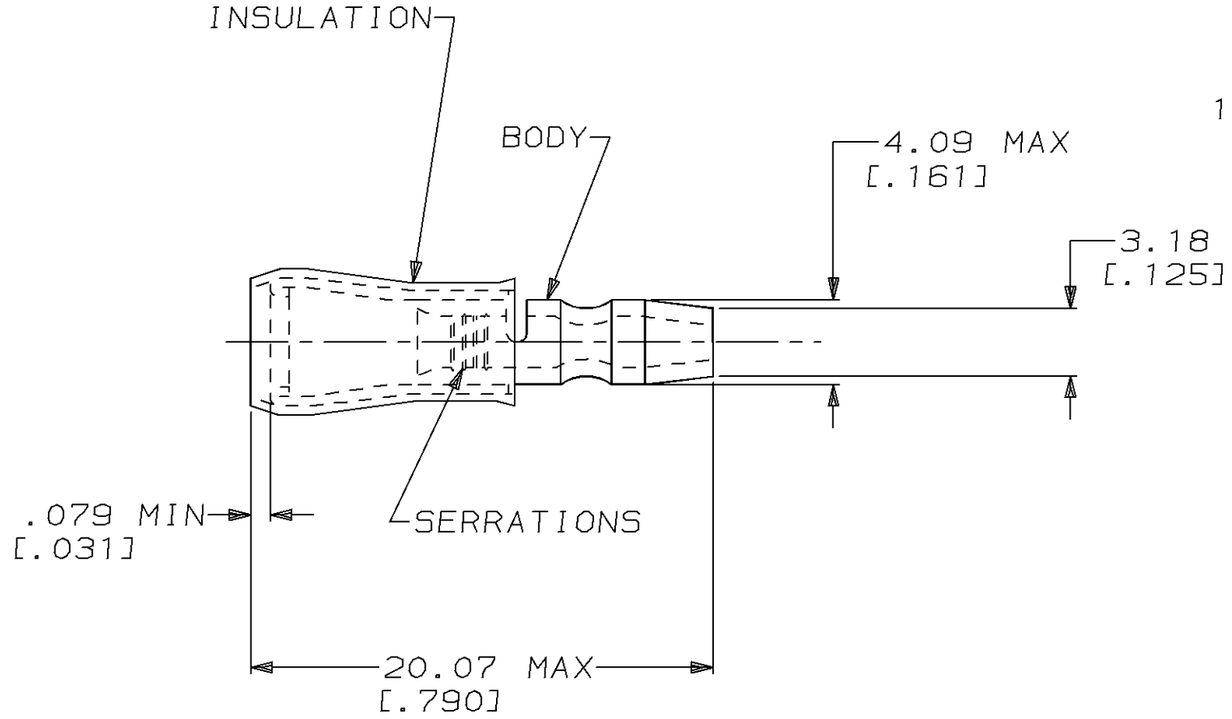

1. WIRE INSUL DIA, 2.92-4.32 [.115-.170]

---	-------	------
---	-------	------
100	LOOSE PIECE, BOX SPL	8-324225-5
100	LOOSE PIECE, BOX	8-324225-1
2500	ON TAPE, REEL	2-324225-1
1000	LOOSE PIECE	324225
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEM

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:
105°C [221°F]

VOLTAGE RATING:
300 V MAX

CIRCULAR MIL AREA:
1.04mm²-2.62mm² [2050-5180]
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm [in]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±-
2 PLC	±0.13[.005]
3 PLC	±-
4 PLC	±-
ANGLES	±-

MATERIAL
BODY, SLV, COPPER PER ASTM B 152
INSUL, NYLON, COLOR, BLUE

FINISH
BODY & SLV, TIN PLATE
PER MIL-T-10727

DWN	M ELLIS 28SEP95
CHK	C PRESNELL 28SEP95
APVD	N BIRCH 28SEP95
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-

CUSTOMER DRAWING

AMP Incorporated
Harrisburg, PA 17105-3608

NAME
TERMINAL, SHUR PLUG, PIDG™,
WIRE SIZE, 16-14 AWG

SIZE	CAGE CODE	DRAWING NO
A3	00779	C-324225

SCALE	SHEET	REV
4:1	1 OF 1	H

AMP 1470-19 REV 09MAY94

17 MAY 1995 14:26:42 AMP10398 <UU128A>DEPT1132>U.DWG1132>U.RBY>U.PIDG>U.CUST