THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


LOC	DIST
G	14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H1	REVISED PER ECO-11-005027	11MAR11	RK	HMR

METRIC

DIMENSIONS LISTED IN mm [INCHES]

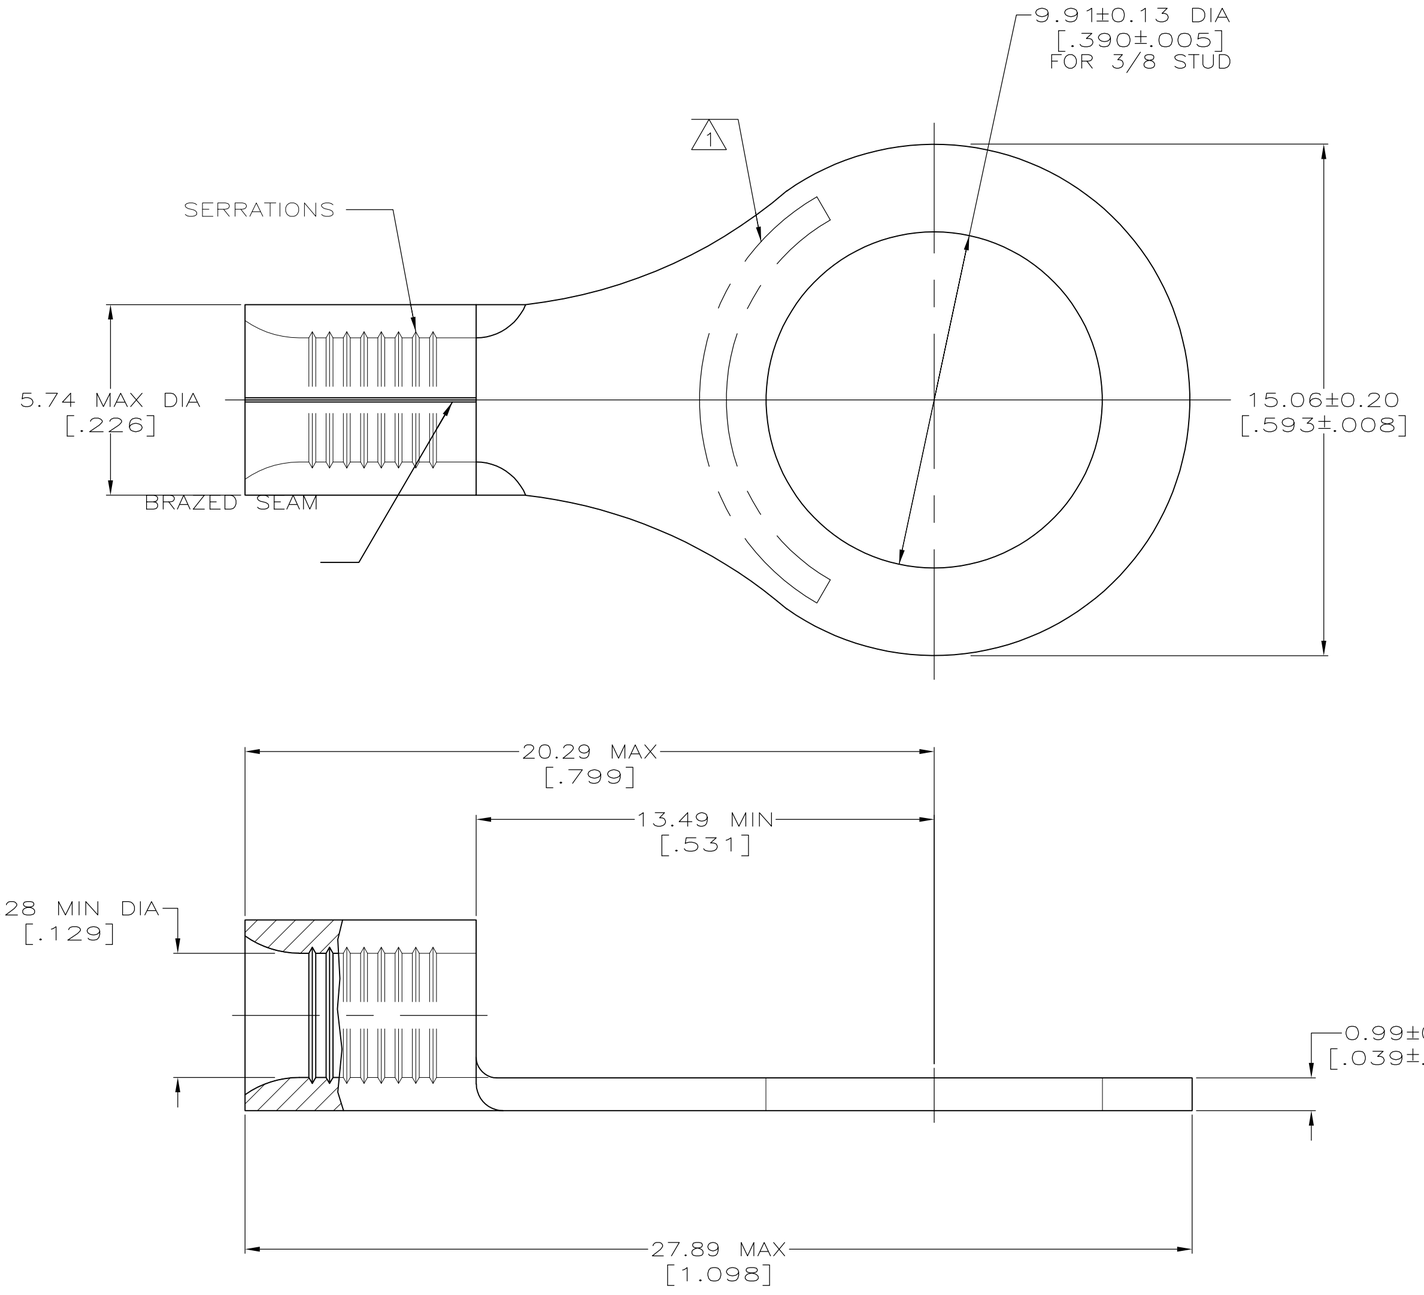

AMP WIRE RANGE	E13288 Listed
12–10 AWG SOLID OR STRANDED	12–10 AWG STRANDED

LR7189 Certified	MILITARY P/N AND CLASS
12–10 AWG SOLID OR STRANDED	MS20659–128 CLASS 1 & 2 P/N 33220 ONLY

1 STAMP AMP 12–10* APPROX AS SHOWN

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1–800–522–6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1–800–722–1111
FOR ORDER ENTRY	1–800–526–5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170° C MAX

VOLTAGE RATING: NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE: 2.62–6.64mm² [5,180–13,100] CIR MILS SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

QTY	PACKAGE TYPE	PART NO
50	LOOSE PIECE, SPCL BOX	8–33220–5
50	LOOSE PIECE, BOX	8–33220–2
1000	TAPE MOUNTED	1–33220–2
–	–	33220

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm[INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: COPPER PER ASTM B–152 ANNEALED

FINISH: TIN PLATE 0.00254[.000100] MIN THK PER MIL–T–10727

DWN	TA BRINKMAN	3–17–93
CHK	DA PATTERSON	3–17–93
APVD	DE MILLER	3–17–93
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

TE Connectivity

NAME: TERMINAL, RING TONGUE, SOLISTRAND™

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-33220	—

CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 OF 1 | REV H1

33220