

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C3	REVISED PER ECO-11-004917	11MAR11	RK	HMR
	C4	REVISED PER ECO-17-008806	19FEB2018	RS	DR

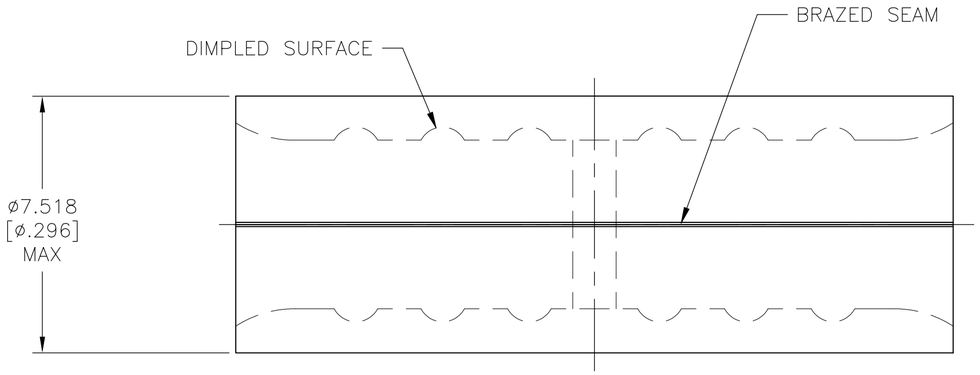

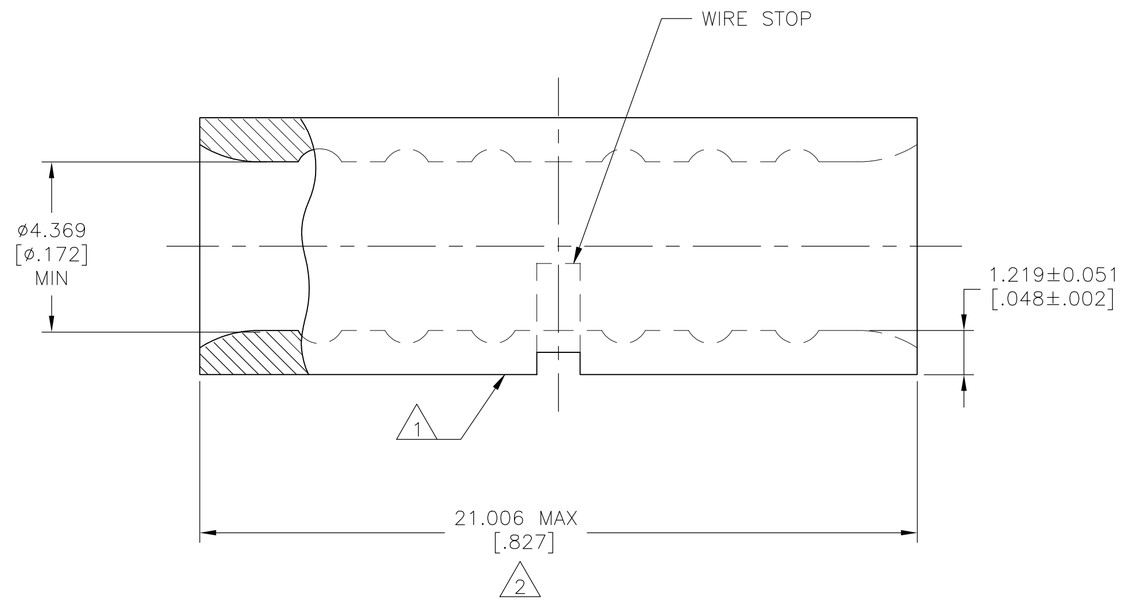

AMP WIRE RANGE	UL Listed FILE E13288	CSA LR7189 Certified
8 AWG SOLID OR STRANDED	8 AWG STRANDED	8 AWG SOLID OR STRANDED

1. STAMP AMP 8W* APPROX AS SHOWN
2. MAXIMUM LENGTH DOES NOT INCLUDE MANUFACTURING TABS
3. COPPER PER ASTM B-152, ANNEALED
4. .000100 MIN TIN PLATE PER ASTM B-545
5. NOTE DELETED

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C[338°F] MAX

VOLTAGE RATING: N/A

CIRCULAR MIL AREA: 6.64-10.5mm² [13,100-20,800] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± 0.127[.005]
4 PLC ± –
ANGLES ± –

MATERIAL -3

FINISH -4

DWN	JR RUTH	19JAN07
CHK	M SPICER	19JAN07
APVD	M SPICER	19JAN07
PRODUCT SPEC	UL 486 A-B	
APPLICATION SPEC	–	
WEIGHT		

QTY	PACKAGING TYPE	PART NO.
25	LOOSE PIECE, BOX	8-34321-3
100	LOOSE PIECE	34321

TE Connectivity Ltd.

NAME: SPLICE, BUTT, STANDARD, SOLISTRAND 8 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-34321	–

CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 OF 1 | REV C4

34321

1471-9 (1/15)