

8-35115-1 ✔ ACTIVE


TE Internal #: 8-35115-1

Closed End Splice, 22 – 14 AWG, .3 – 2 mm² Wire, 509 – 5180 CMA, Fully Insulated, Copper, 4 Serration, 17.27 mm [.68 in] Length, Loose Piece

View on TE.com >

Terminals & Splices > Splices

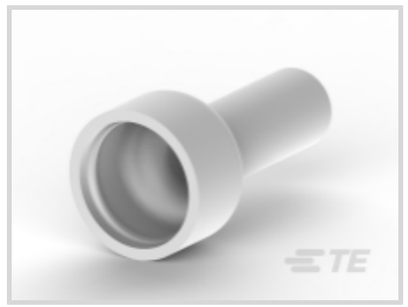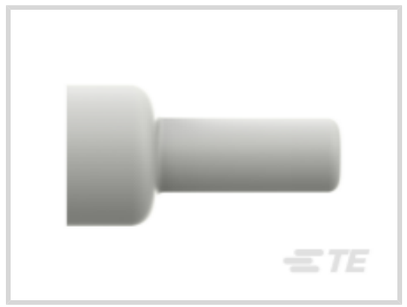

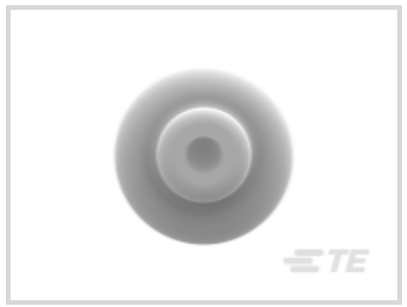
Splice Type: **Closed End Splice**

Wire Size: **.3 – 2 mm²**

Sealable: **No**

Compatible Insulation Diameter Range: **6.35 mm [.25 in]**

Features

Product Type Features

Splice Type	Closed End Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Insulation Support

Configuration Features

Number of Serrations	4
Compatible With Wire & Cable Type	Discrete Wire

Body Features

Product Weight	.554 g

Contact Features

Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed

Dimensions

Wire Size	509 – 5180 CMA

Compatible Insulation Diameter Range	6.35 mm[.25 in]
Product Length	17.27 mm[.68 in]

Usage Conditions

Insulation Option	Fully Insulated

Operation/Application

Compatible With Wire Base Material	Copper

Identification Marking

Splice Marking	ECN

Industry Standards

Government Qualified Splice	No

Packaging Features

Packaging Quantity	100
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 217212-2
PRO-CR DIE, CES



TE Part # 217212-1
PRO-CR ASSY, CES



TE Part # 45216
DAHT AMP CLOSED END SPLICES 22-14 ASSY

Customers Also Bought



TE Part #177801-000
10613-24-9



TE Part #DTP04-2P
REC, 2P, GRY, N




TE Part #T4010019041-000
M8,SCREW, FEMALE,S,SHIELD,4P, GOLD



TE Part #T4110001041-000
M12,FEMALE,STRAIGHT,A CODE,4P, PG7,GOLD




TE Part #140759
250 FASTON,TAB,TPBR




TE Part #173706-1
E-J MK-2 070 TAB CONT LP



TE Part #1-480709-0
12P UMNL CAP HSG NATL

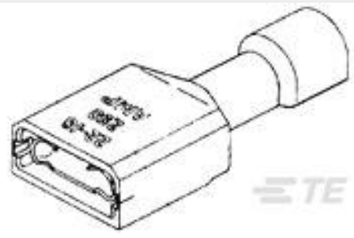

TE Part #4-520448-2
ULTRAFAST 250 ASSY REC 12-10 TPBR LP



TE Part #4-521098-2
ULTRA-FAST 250 ASSEMBLY 12-10 AWG TPBR



TE Part #1-770903-0
MINI UMNL PIN 22-18 AWG AU

Documents

Product Drawings

SPLICE,N CE 22-14

English

CAD Files

Customer View Model

ENG_CVM_CVM_8-35115-1_AH.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_8-35115-1_AH.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-35115-1_AH.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English