925380-1 ✔ ACTIVE


AMP | Timer Connector System

TE Internal #: 925380-1

35 Position, Black, Cover, PA 66 GF13, 90 ° Cable Exit, -30 – 105 °C [-22 – 221 °F], Timer Connector System

View on TE.com >

Automotive Parts > Automotive Connector Accessories > Automotive Connector Caps & Covers

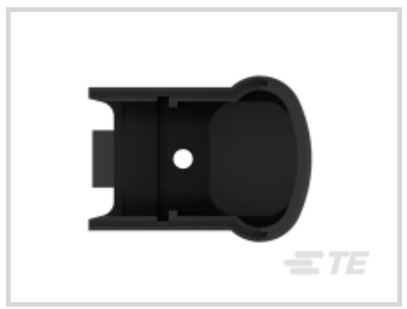


Number of Positions: **35**

Primary Product Color: **Black**

Protection & Strain Relief Accessory Type: **Cover**

Primary Product Material: **PA 66 GF13**

Cable Exit Angle: **90 °**

Features

Product Type Features

Protection & Strain Relief Accessory Type	Cover

Configuration Features

Number of Positions	35

Body Features

Primary Product Color	Black
Primary Product Material	PA 66 GF13
Cable Exit Angle	90 °

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 828761-1
55P JUN-TIM GEH MIX

Also in the Series | Timer Connector System

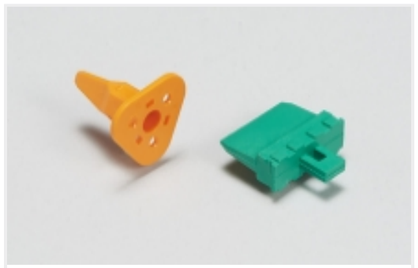

Automotive Connector Locks & Position Assurance(15)




Automotive Housings(186)




Automotive Seals & Cavity Plugs(32)



Automotive Signal & Power Connector Housings(136)

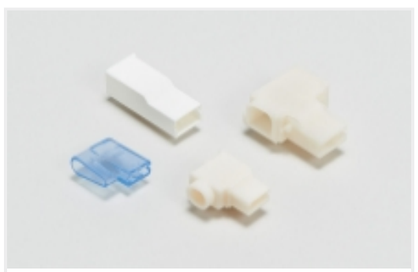

Crimp Terminal Housings(13)

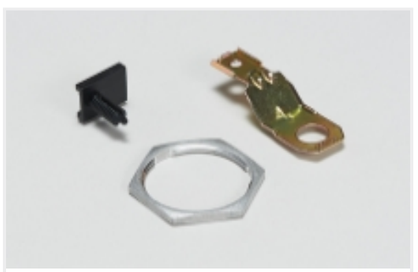

Other Automotive Connector Accessories(1)


Customers Also Bought



TE Part #1011-228-0205
BKSHL, 2P, BLK, PLG, RA, NW6/7.5/8.5 /10




TE Part #927777-1
JUNIOR POWER TIMER CONTACT

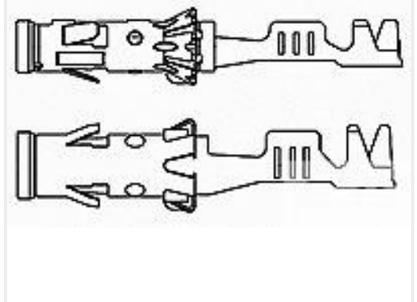

TE Part #929989-7
1,5MM CONT.SOCK SWS



TE Part #CAT-T4827-T273
TIMER, RECEPTACLE AND TAB

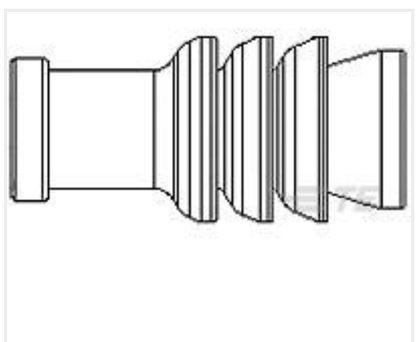

TE Part #967067-2
MQS EINZELLEITDICHT



TE Part #7-1452668-3
MCON 1.2 LL REC SWS AG



TE Part #2-1670917-1
3POS, MCON 1.2 LL REC SEALED



TE Part #2-1703494-1
3POS, MCON 1.2 LL TAB SEALED COD B



TE Part #1718760-1
MCON 1.2 LL TAB SWS SN

Documents

Product Drawings

TIMER CONN.HSG

English

CAD Files

Customer View Model

ENG_CVM_925380-1_F2.3d_stp.zip

English

Customer View Model

ENG_CVM_925380-1_F2.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_925380-1_F2.3d_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

35-POS. L-JETRONIC CONNECTOR USING MINI-SPRING RECEPTACLE

English

35-POS. L-JETRONIC CONNECTOR USING MINI-SPRING RECEPTACLE

Japanese

Product Specification

Japanese

Product Specification

English