963815-2 ✔ ACTIVE

FASTIN-FASTON | FASTIN-FASTON 110

TE Internal #: 963815-2

Quick Disconnect Tab, Uninsulated, 17 – 13 AWG, 1.03 – 2.62 mm² Wire, 2.8 mm [.11 in] Tab Width, F-Crimp, Straight, Copper, FASTIN-FASTON 110

View on TE.com >

Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Tab**

Wire Size: **1.03 – 2.62 mm²**

Mating Tab Width: **2.8 mm [.11 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	2.8 mm[.11 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Copper
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With

Dimensions

Product Length	26 mm[1.02 in]
Compatible Insulation Diameter Range	2.1 – 2.9 mm[.083 – .114 in]
Terminal Material Thickness	.4 mm[.015 in]
Wire Size	1.03 – 2.62 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]

Industry Standards

Compatible With Agency/Standards Products	UL

Packaging Features

Packaging Quantity	500
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 1-1579007-6
EXTRACTION TOOL



TE Part # 880654-1
.250 SERIES FASTIN-



TE Part # 2-1579007-5
EXTRACTION TOOL

Also in the Series | FASTIN-FASTON 110




Automotive Housings(6)



Automotive Signal & Power Connector Housings(6)



Automotive Terminals(5)

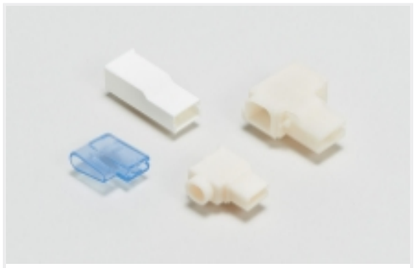

Crimp Terminal Housings(34)




Insertion & Extraction Tools(3)




Quick Disconnects(78)

Customers Also Bought

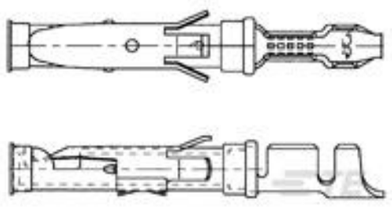

TE Part #163088-1
062 SOC.ASS. TYP3+



TE Part #925660-1
.140 DIA PIN



TE Part #926893-1
UNIV.M-N-L.SOCKET CONTACT

Documents

Product Drawings
DOUBLE LOCKING LANCE 110 TAB PTP CUSN4

English

DOUBLE LOCKING LANCE 110 TAB PTP CUSN4

English

CAD Files

Customer View Model

ENG_CVM_963815-2_G.3d_igs.zip

English

Customer View Model

ENG_CVM_963815-2_G.3d_stp.zip

English

Customer View Model

ENG_CVM_963815-2_G.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English