

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	PER ECR-17-001806	10FEB2017	F.Y	X.X

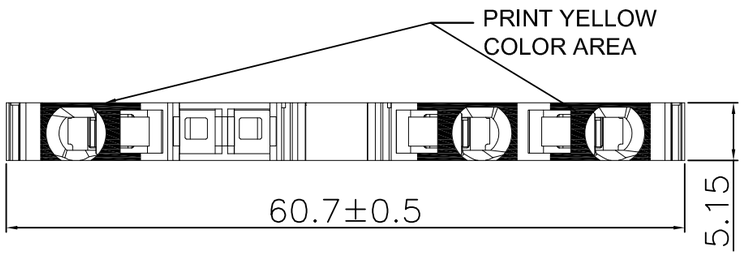

ITEM	COMPONENTS	MATERIAL	Q'TY	PLATING
4	GROUND TERMINAL	COPPER ALLOY	1	Cu underplated Matte Tin Plated
3	SPRING CLAMP	STAINLESS STEEL	3	
2	TERMINAL	COPPER	1	Matte Tin Plated
1	HOUSING	THERMOPLASTIC	1	

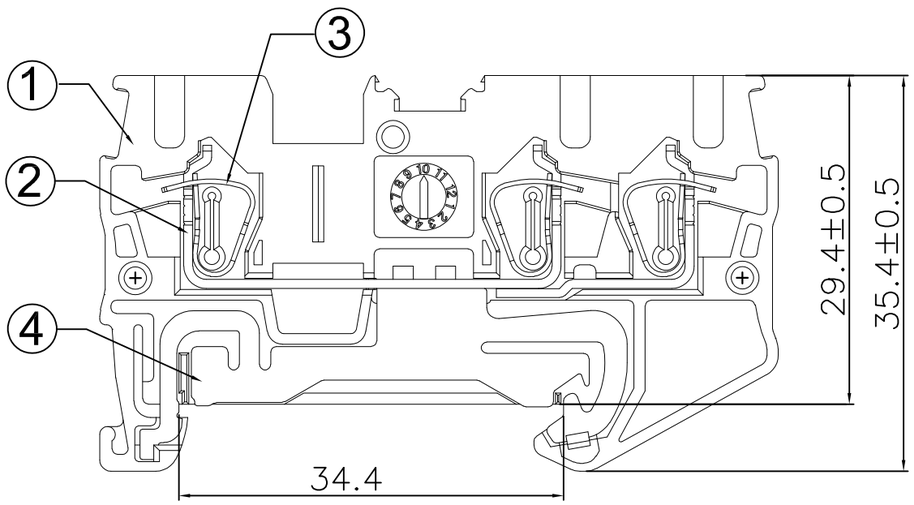

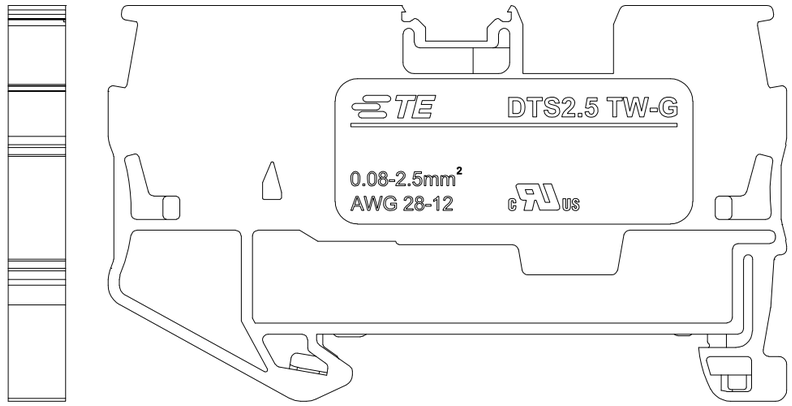

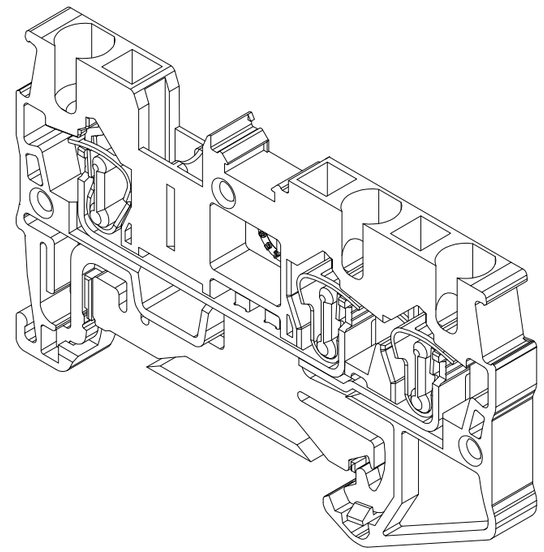

NOTE:
1. Material:See Table
2. Rated voltage : 600V
3. Rated surge voltage: 8KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 8mm -10mm
6. Suitable wire size : 28 - 12AWG
7. Requirement for environmental substance must be compliance with ROHS and REACH.
8. Recommanded support rail requirements refer to 114 application specification.

DTS 2.5 TW-G	2271849-1	GREEN & YELLOW
TE SERIES No.	PART NUMBER	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.50
1 PLC	± 0.40
2 PLC	± 0.30
3 PLC	± –
4 PLC	± –
ANGLES	± 3°

MATERIAL: SEE TABLE

FINISH: –

DWN FENCER yU 10FEB2017
CHK XIANG XU 10FEB2017
APVD XIANG XU 10FEB2017
PRODUCT SPEC 108-137142
APPLICATION SPEC 114-137138
WEIGHT 10.5 g

TE Connectivity

NAME
2.5MM^2 WIRE SECRION 1 IN 2 OUT
SPRING CLAMP TYPE PROTECTIVE TERMINAL BOLCK
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2271849	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV A1