
PXM7012/10P/CR Datasheet

Product Name // Front Panel Mount Connector PXM7012 Series 10 Contact Plug Crimp/Solder Termination (contacts available separately) Metal Body

View Product Page



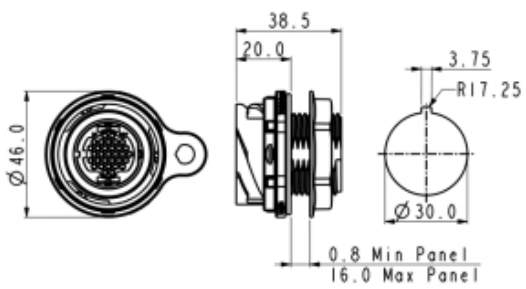

// Product Description:

- F P M C
- W IP66, IP68, IP69K
- Q
- P S
- 2, 3, 6, 10, 32 C E 3 C
- S , C /S , ; S , C /S
- C :
- P (P P). P P7082 ( ) P M7082 ( ) S C IP
- M (P M). P M7083 S C IP
- M P P7010/P M7010 S F C

// General Information:

Product Display Title:	F P M C
Product Family:	C P C
Product Series:	7000 S B
Approvals:	UL, UL
Body Material:	A - N P
Body Material Type:	M B
Contact Type:	P C
Coupling Type:	B L
Current Max:	10A, 6A
Diameter Over Coupling Ring Mm:	42
Flamability Rating:	UL94V-0
Function:	F P M C
Ip Rating:	IP66, IP68, IP69K
Max Contact Accomodation Awg:	20AWG
Min Contact Accomodation Awg:	18AWG
Max Contact Accomodation Mm2:	0.82 2
Min Contact Accomodation Mm2:	0.52 2
Max Operating Temperature:	+120 C
Min Operating Temperature:	-40 C
Number Of Contacts:	10 C
Voltage Max:	600V

// Product PDF Links

7000 Series power connectors...

7000 Series metal body power...

// Product 3D CAD Model Links

PXM7012/10P/CR3D CAD Model