


REV	ECO	DATE
C	19301	6/27/2003
D	19722	3/29/2004
E	25325	5/1/2015

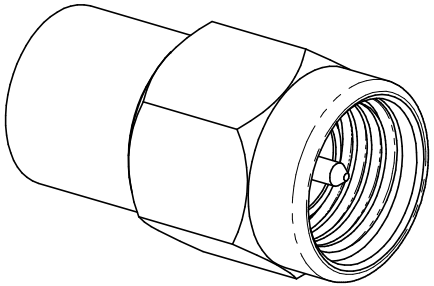

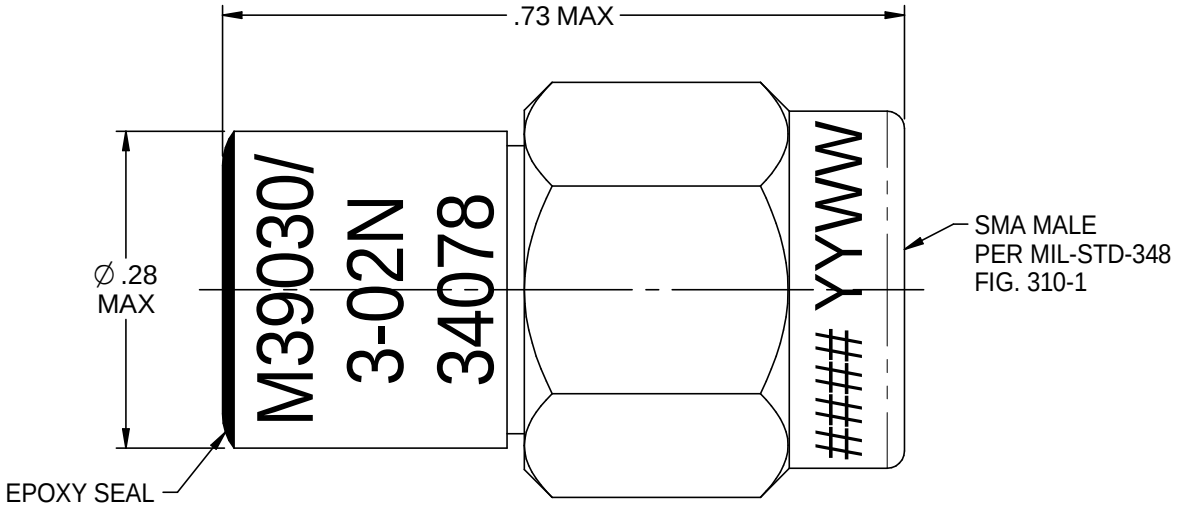

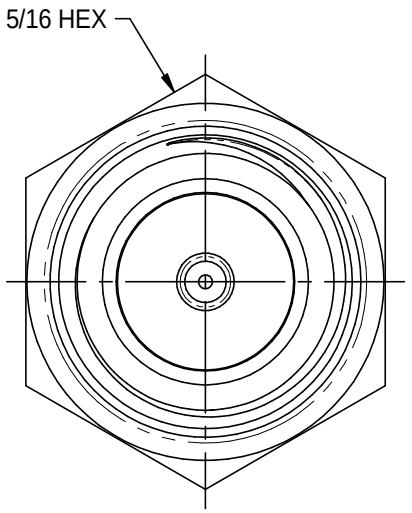

M39030/3-02N SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH:
   - 1.1 BODY: PASSIVATED STAINLESS STEEL
   - 1.2 DIELECTRIC: PTFE (TEFLON)
   - 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
   - 1.4 GASKET: SILICONE RUBBER

2. SPECIFICATIONS:
   - 2.1 FREQUENCY RANGE: DC - 18 GHz
   - 2.2 IMPEDANCE: 50 OHMS
   - 2.3 VSWR (MAX): 1.05+0.01f (GHz)
   - 2.4 POWER HANDLING CAPABLITY:
     - 2.4.1 AVERAGE: 0.5 WATTS MAX AT 25°C DERATED LINEARLY TO 0.125 WATTS AT 125°C
     - 2.4.2 PEAK: 50 WATTS WITH A 1% DUTY CYCLE
   - 2.5 OPERATING TEMPERATURE RANGE: -55°C TO 125°C
   - 2.6 WEIGHT (MAX): .25 oz

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

Model No. M39030/3-02(N OR S)

RoHS2 2011/65/EU

UNLESS OTHERWISE SPECIFIED UNITS: INCH

.XX ±.02
.XXX ±.005
ANGLES ±2°

Cage Code 34078

3RD ANGLE PROJECTION

Drawn by: C. WALLACE

Date: 5/7/2015

MIDWEST MICROWAVE

Title: QPL TERMINATION

Drawing No. M39030/3-02(N OR S)-01

Rev. E

Size A | DO NOT SCALE DRAWING | Workmanship Std: NONE | Sheet 1 of 1

Please read our datasheet & drawing disclaimer here.