

used for: DIN 41651

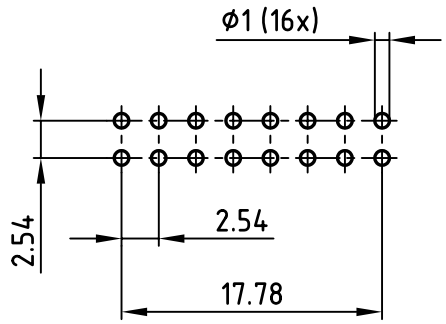

P.C.B.-HOLE DRILLINGS

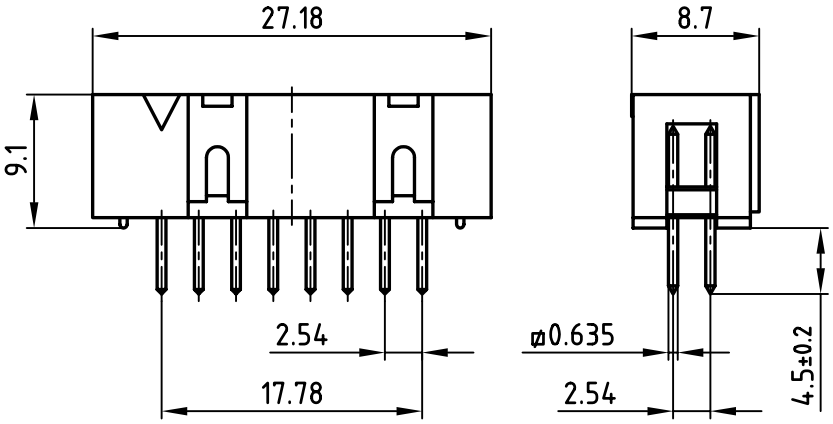

NOTES:

1. PLASTIC HOUSING SPECIFICATION
   - PLASTIC MATERIAL: PBT 20% GF
   - PRODUCT RATING: UL-94 V-0
2. CONTACT SPECIFICATION
   - BASE MATERIAL: Cu Sn 5
   - PLATING: SELECTIVE PLATING:
     GOLD 4µin
     TIN 30µin
     over 50µin NICKEL BASE
3. PERFORMANCE RATING
   - WITHSTANDING: 1000V DC or AC PEAK
   - CURRENT RATING: 1.0A
   - CONTACT RESISTANCE: 20mOhm
   - INSULATION RESISTANCE: 5000MOhm at 100V
   - NORMAL OPERATING TEMPERATURE:
     -40 DEGREE TO +105 DEGREE CENTIGRADE

Directive 2002/95/EC „RoHS“ Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance

	date	name
2007		
drawn	30.08.	Lehmenkühler
appd.	30.08.	Mickenbecker
norm	DIN 41651	
d-old		

CONEC®

scale: 2:1

material: SEE DRAWING

title:

LOW PROFILE HEADER

16pos.

with straight solder pins

dwg no: 14K1A020

AutoCAD 2006

DIN-A 4

sh: 1/1

part no: 141A11749X