


used for: D-SUB

Part-No.	No. of pos.	A -0.76	B -0.25	C
164A10469X	9	31.19	16.46	25.00 $^{+0.12}_{-0.13}$
164A10479X	15	39.52	24.79	33.30 $^{+0.15}_{-0.1}$
164A10489X	25	53.42	38.50	47.04 ±0.13
164A10499X	37	69.70	54.96	63.50 ±0.13

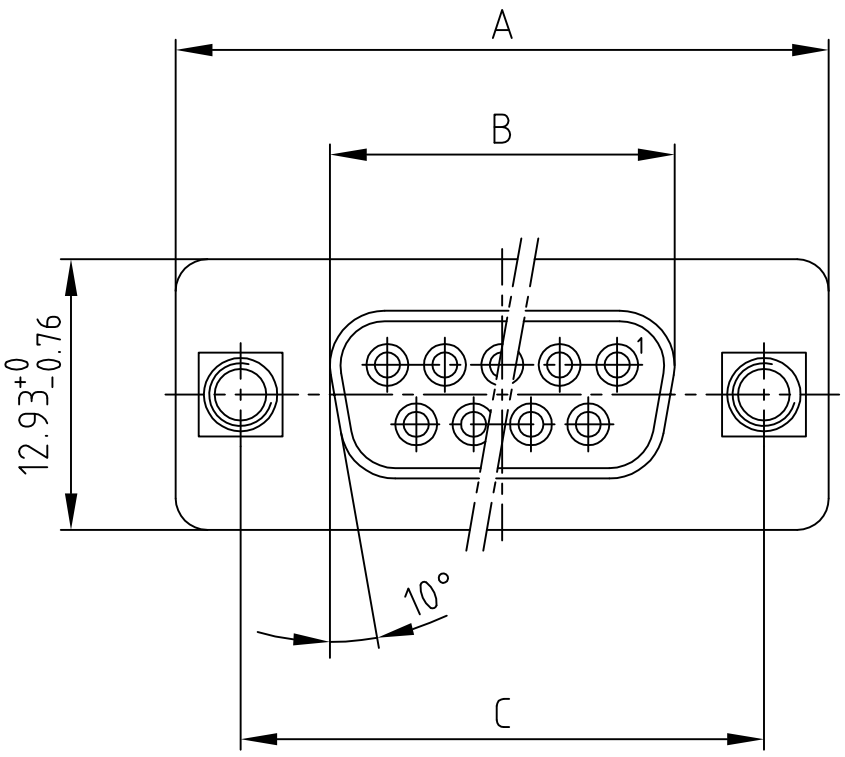

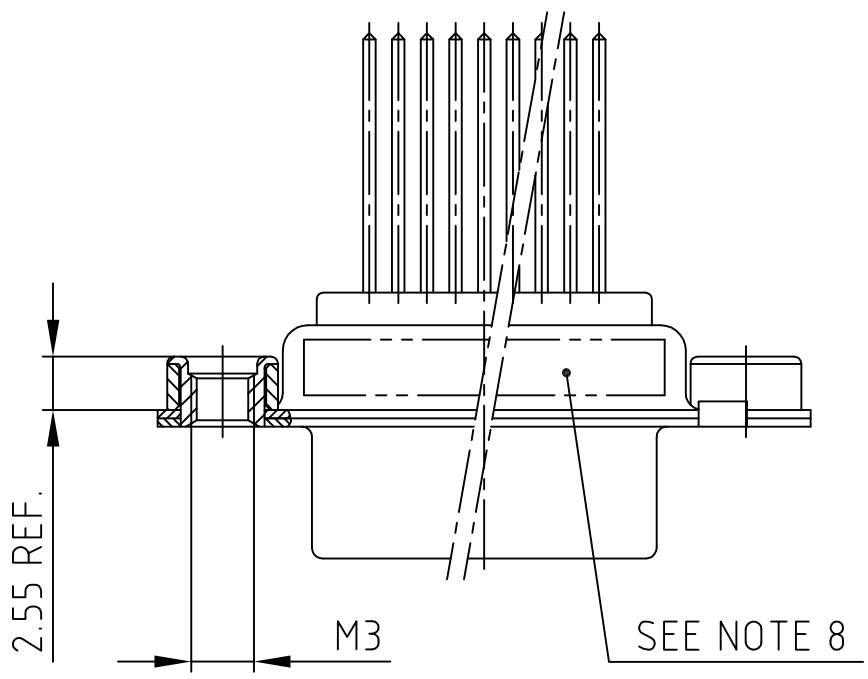

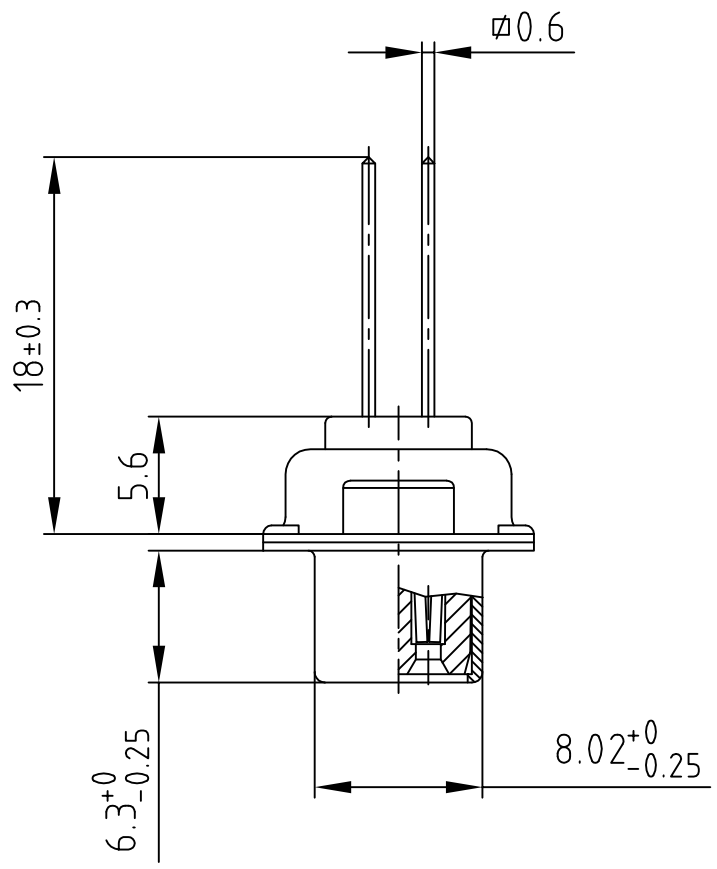

NOTES:

1. METALSHELLS: STEEL; min. 320µin TIN
2. INSULATORS: PBT GF UL 94 V-0; BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8µin HARD GOLD over min. 50µin NICKEL
5. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
7. MAXIMUM TORQUE VALUE FOR THREAD: 6.LB
8. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

scale: 2:1

material: SEE NOTES

	date	name
2002		
drawn	22.03.	Parei
appd.	22.03.	E. Mickenbecker
norm	DIN 41652	
d-old		

title:

D-SUB FEMALE
9-37pos. WIRE WRAP
with threaded insert

dwg no: 16K1A531

AutoCAD 2000

DIN-A 4

sh: 1/1

part no: SEE TABLE