


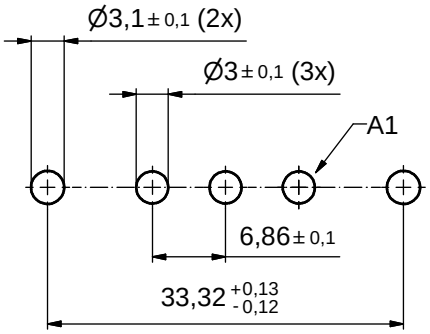


P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

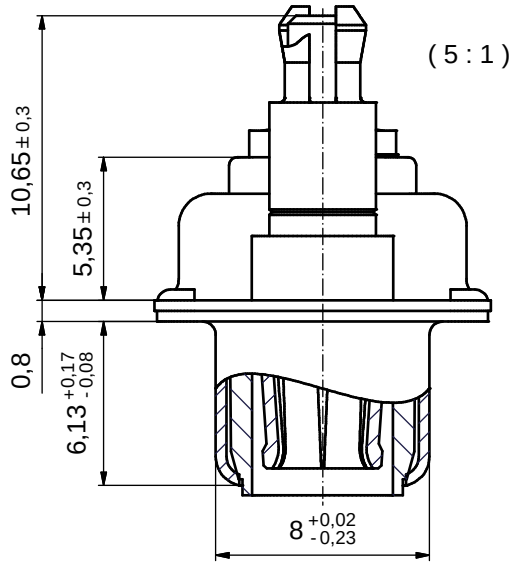


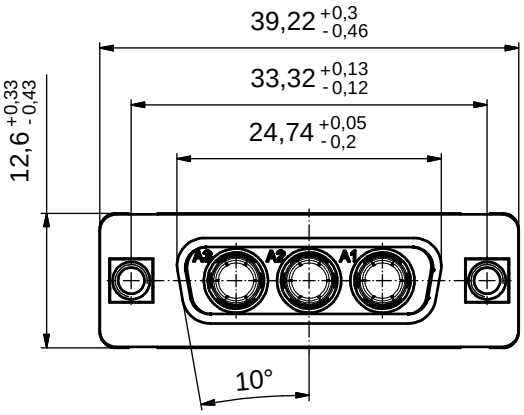

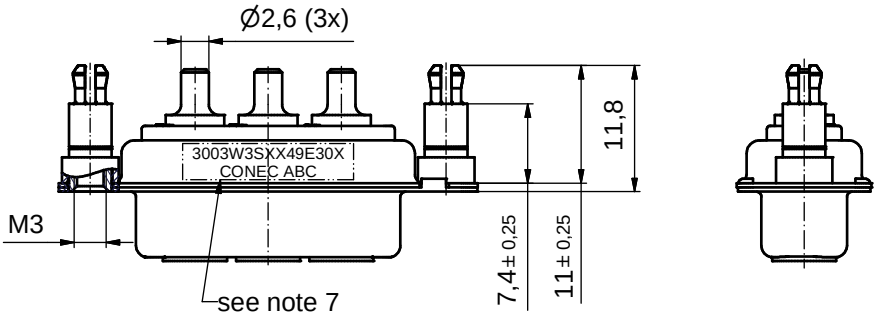

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATOR: PBT GF UL 94 V-0, GREEN
3. HIGH POWER CONTACTS 20A: COPPER ALLOY
   PLATING MATING AREA: 30µin HARD GOLD over min. 50µin NICKEL
   PLATING TERMINATION SIDE: 160-240µin TIN over 80µin NICKEL
4. THREADED SPACER CLIPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
   PCB-HOLE: ⌀3,1± 0,1mm; PCB-THICKNESS: 2,3mm
5. COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 3003W3SXX49E30X CONEC ABC

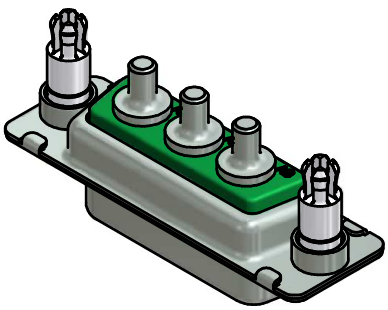

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance: dim. in mm

	date	name
drawn	01.02.11	Schmidt
appd.	01.02.11	Koch
norm		
d-old		

scale: 2:1 (5:1)
material: see notes

title:
D-SUB COMBINATION FEMALE
3W3S
with threaded spacer clip

dwg no: 13K1A3562
DIN-A3
sh: 1

part no: 3003W3SXX49E30X