


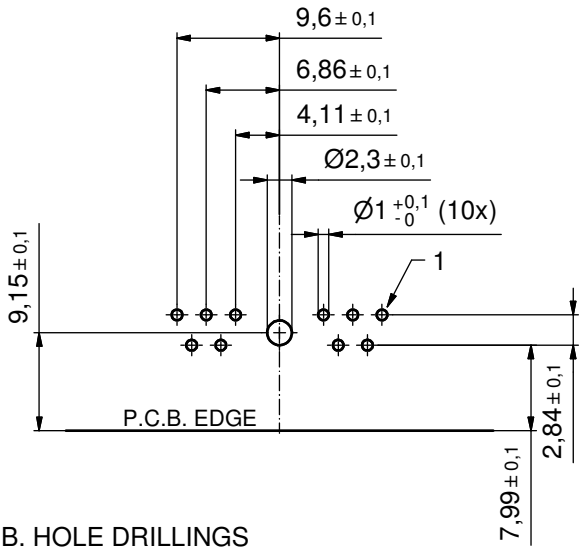



P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)


(5 : 1)

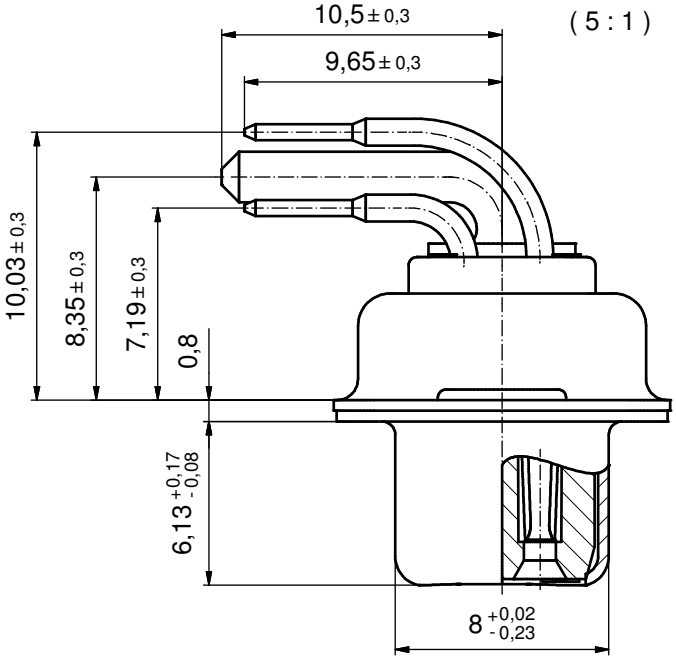

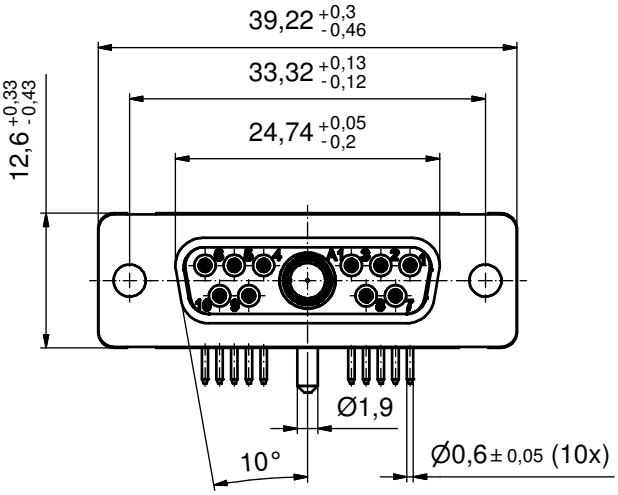

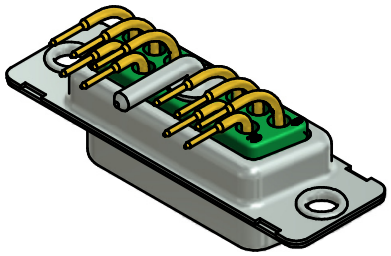

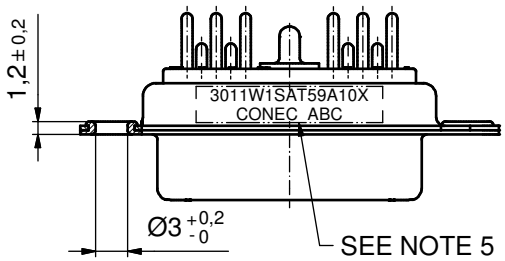



NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0; GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
   PLATING: GOLD FLASH over NICKEL
4. HIGH POWER CONTACT 15A: COPPER ALLOY
   PLATING MATING AREA: GOLD FLASH over NICKEL
   PLATING TERMINATION SIDE: 160-240µin TIN over 80µin NICKEL
5. CONNECTOR IS PART MARKED: 3011W1SAT59A10X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Original		

tolerance
dim. in mm

	date	name
drawn	25.10.11	Henneboel
appd.	26.10.11	Fischer
norm		
d-old		

scale: 2:1 (5:1)
material: SEE NOTES

title:
D-SUB COMB. FEMALE 90°
11W1S

dwg no: 13K1A3805
DIN-A3
sh: 1

part no: 3011W1SAT59A10X