
Image gallery | 3D view

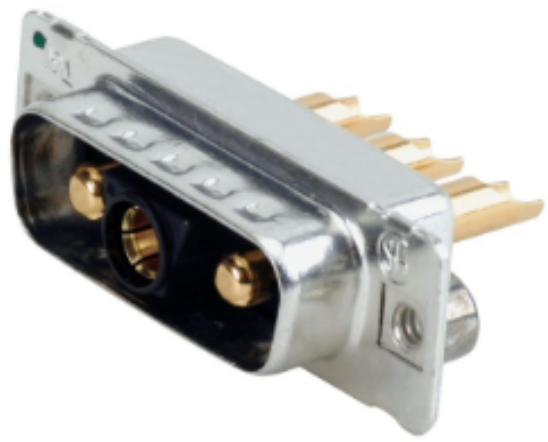

Part No: 3F3CPA22S43A30X

Product Description

- Filter Combination D-SUB
- 3W3C [o\o/o]
- Plug
- C-Filter
- 47 nF
- Threaded Insert

Inquiry

General Data | Technical Data | Material Data | Standards | Downloads

Dielectric with standing voltage power	707 V DC
Capacitor value power contact	47 nF
Power contact cross section	AWG 10- 12
Working voltage power	100 V DC
Quality class	Quality class 3
Mating cycles	50
IP rating	IP 20
Current rating power	30 A
Insertion force	21 N
Extraction force	21 N
min. working temperature	-55° C
max. working temperature	+125° C
Filter type	C