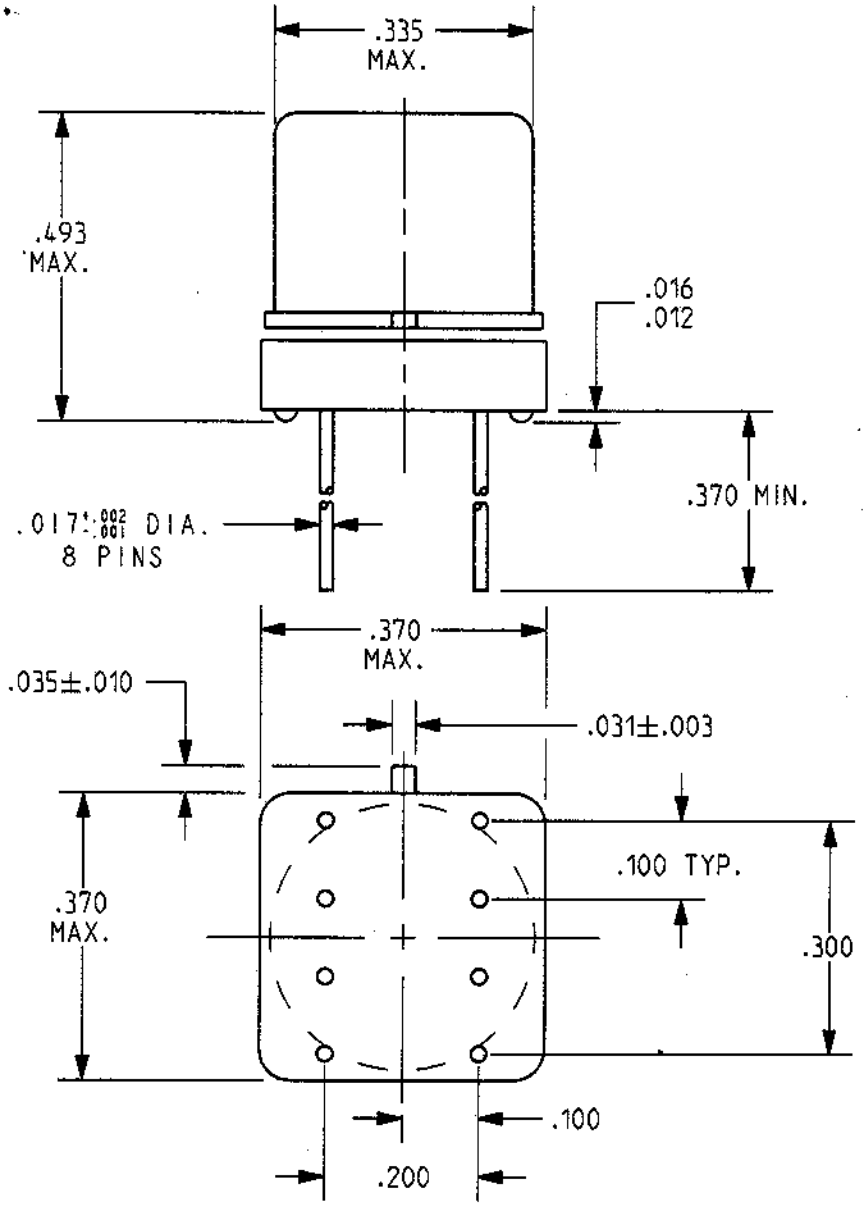


REV. 0
DCO 143778

COIL: @ 25°C

RESISTANCE 100 OHMS ±10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.6 VDC

MUST RELEASE 1.4 VDC MAX. 0.23 VDC MIN.

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 21AUG03 9/22/03

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/16-041M REV.

"JMSD" RELAY

JMSCD-5XMS