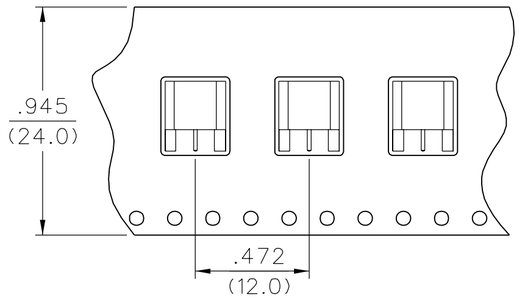
PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR	PACKAGING
127-0701-801	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	BULK PACK 5 PCS/BAG
127-0701-802	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	TAPE AND REEL 1000 PCS. PER FIG 1






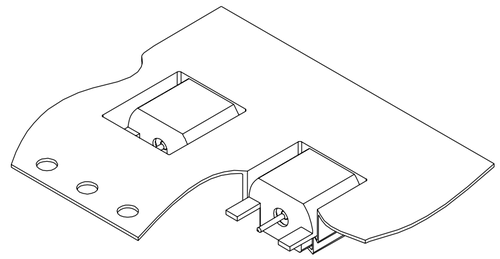


FIG 1
2:1 TOP VIEW

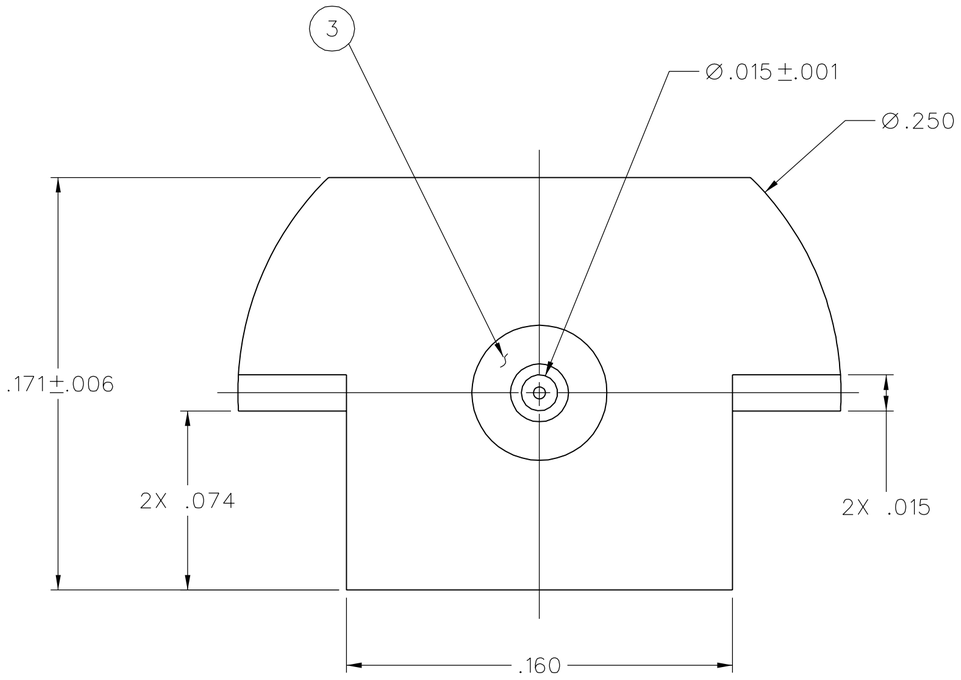

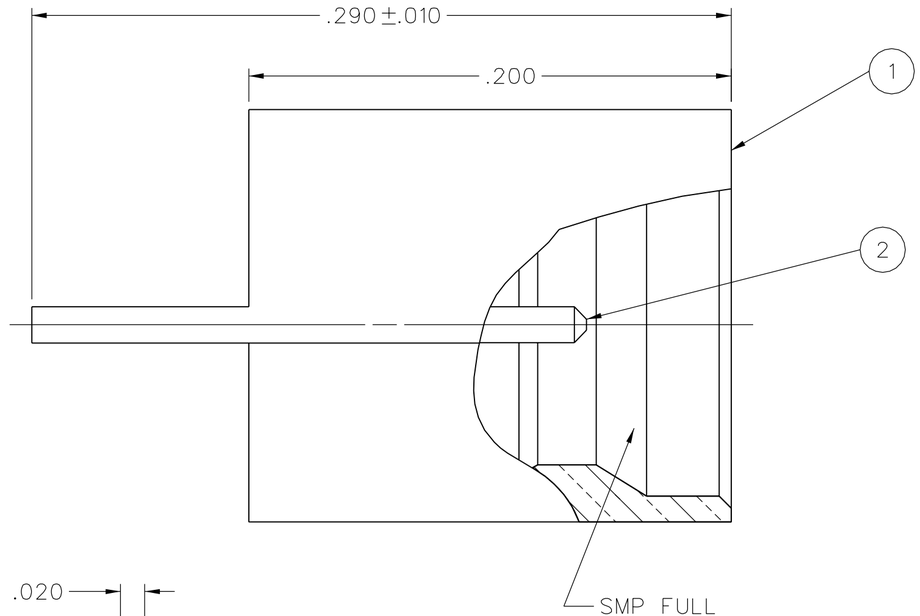

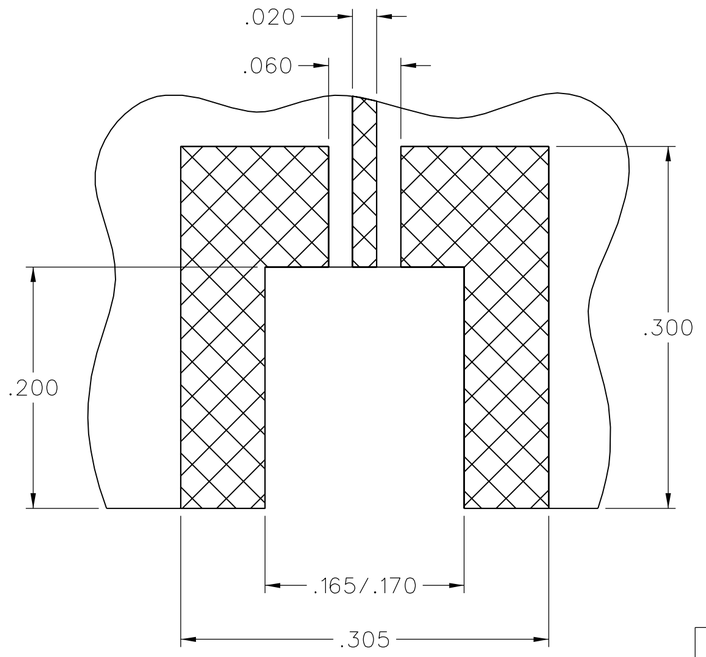

NOTES:

1. SPECIFICATIONS:

IMPEDENCE: 50 OHMS NOMINAL
FREQUENCY RANGE: 0-18 GHz
VSWR: DEPENDANT ON APPLICATION
WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHM MIN
CONTACT RESISTANCE:
CENTER CONTACT - INITIAL 6.0 MILLIOHM MAX, AFTER ENVIRONMENTAL NOT APPLICABLE
OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX, AFTER ENVIRONMENTAL NOT APPLICABLE
CORONA LEVEL: 190 VOLTS MIN AT 70,000 FEET
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 325 VRMS MIN AT 4 AND 7 MHz

MECHANICAL:

INTERFACE DESIGN: IN ACCORDANCE WITH MIL-STD-348A, SERIES SMP, FULL DETENT
ENGAGEMENT FORCE: 15 LBS MAX
DISENGAGEMENT FORCE: 5 LBS MIN
CONTACT RETENTION: 1.5 LBS MIN AXIAL FORCE
DURABILITY: 100 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF DSCC DWG NO. 94007)
OPERATING TEMPERATURE: -65°C TO 165°C
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B, EXCEPT 165°C HIGH TEMP
MECHANICAL SHOCK: MIL-STD-202, METHOD 213, CONDITION I
CORROSION: MIL-STD-202, METHOD 101, CONDITION B
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106, EXCEPT STEP 7B OMITTED

RECOMMENDED PCB LAYOUT

THIS PATTERN IS FOR REFERENCE ONLY. PATTERN WILL VARY DEPENDING ON ASSEMBLY PROCESS, BOARD TYPE, OR ELECTRICAL AND MECHANICAL REQUIREMENTS.

Please read our datasheet & drawing disclaimer here.

DRAWING NO.
C-127-0701-801/810

0	REVISIONS							
ENGINEERING RELEASE								
1	7-6-07	PAT	JRK	MJU	PDW	JCN	7-16-07 ECN 51107	
.945 (24.0) WAS .630 (16.0)								
* REVISION NUMBER FOLLOWED BY AN ALPHA CHARACTER INDICATES DRAWING CLARIFICATION OR PART NUMBER ADDITION ONLY. *								
1a	7-30-07	PAT	JRK	PDW	JCN		7-30-07 ECN 51156	

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS	mm	PAT	6-27-07
.XX ———	———	CHECKED BY	DATE
.XXX ±.003	———	JRK	7-16-07
MATL ———		APPROVED BY	DATE
		PDW	7-16-07
FINISH ———		RELEASE DATE	7-16-07
		U/M INCH	SCALE 20:1

cinch CONNECTIVITY SOLUTIONS a bel group
Cinch Connectivity Solutions
P.O. Box 1732
Waseca, MN 56093
1-800-247-8256

TITLE
SMP FULL DETENT
SURFACE MOUNT
END LAUNCH

SHEET 2 OF 2

DRAWING NO.
C-127-0701-801/810

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL