

AFCI CONFIDENTIAL

view shown without plastic pin and grounding

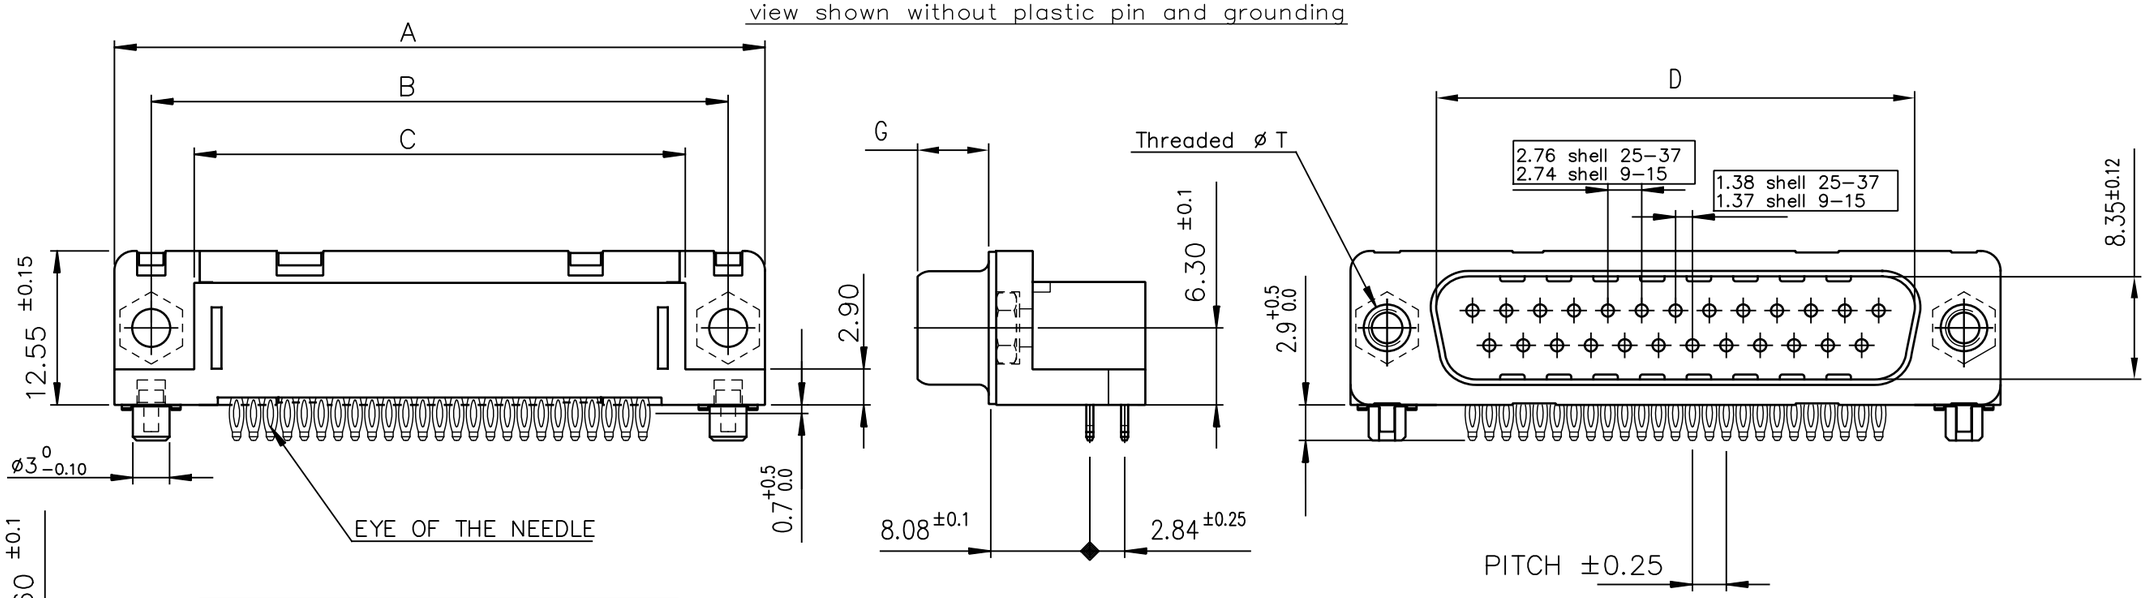

Detail of grounding strip

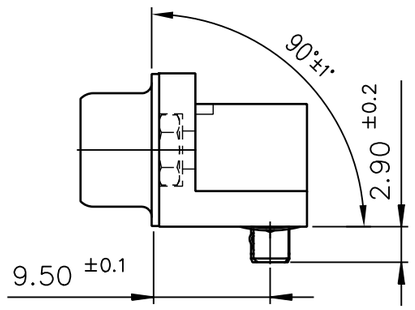

PC card drilling dimensions(after plating)
(thickness 1.60 or 2.40±0.20mm)

PART NUMBER

SHELL	A±0.38	B±0.12	C±±0.10	D +0.25 0	E±0.07	G	PART NUMBER 200 MATING CYCLES	PART NUMBER 500 MATING CYCLES
09	30.81	24.99	18.00	16.79	10.96	5.90 +0.15 0	D09P80C4G*00LF	D09P80C6G*00LF
15	39.14	33.32	26.32	25.12	19.18	5.90 +0.15 0	D15P80C4G*00LF	D15P80C6G*00LF
25	53.03	47.04	40.04	38.84	33.12	5.70 +0.25 0	D25P80C4G*00LF	D25P80C6G*00LF
37	69.32	63.50	56.50	55.30	49.68	5.70 +0.25 0	D37P80C4G*00LF	D37P80C6G*00LF

Threaded ØT M3 = L
Threaded ØT 4.40 = X

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01−8646−0001

mat'l. code: SEE NOTE				surface: ISO 1302		tolerance: ISO 406 ISO 1101		projection	product family: D−SUB		
ltr	ecn no	dr	date	tolerances unless otherwise specified					title: MALE CONNECTOR DELTA−D US RIGHT ANGLED PRESS FIT		
J	ELX−I−17859	MP	2014−06−06	angles	linear	.0±0.1		mm			
K	ELX−I−280162	DJ	2026−03−03			.00±0.1					
				0°±2°		.000±0.1		scale 2:1			
				dr	PESSON	1995−10−27			dwg no: C01−8646−0408	sheet 1 of 1	size A3
				engr	DIPU JOSEPH	2026−03−03					
				chr	GREGAR M	2026−03−03			type: Product Customer Drawing		
				appd	ALEX BABU	2026−03−03					
sheet index	revision sheet	K 1									

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of AFCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of AFCI. © 2016 AFCI