



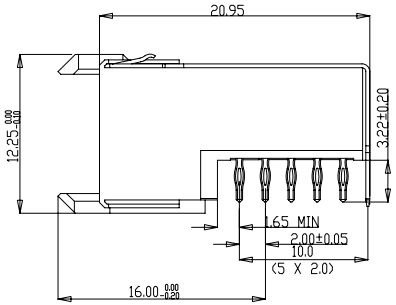

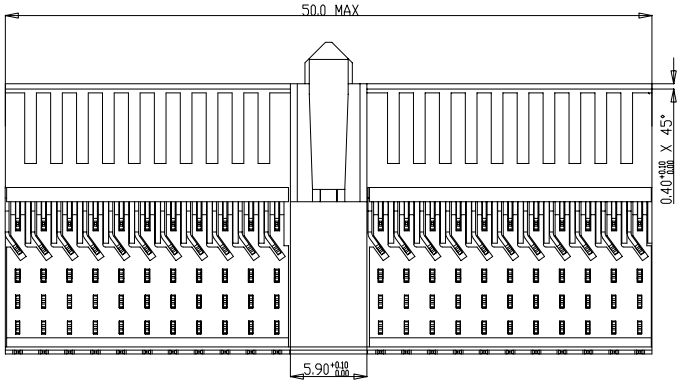

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)

OPERATING TEMPERATURE -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX


INSERTION FORCE :0.75 N MAX /CONT

EXTRACTION FORCE: 0.15 N MIN /CONT

INSULATION RESISTANCE :10^4 MΩ MIN

NOTES

1. LEAD FREE INDICATOR : LF- LEAD FREE
   PERFORMANCE LEVEL INDICATIOR
   (REF DWG No. BS,C,201844,003)
2. THIS PRODUCT IS CSA APPROVED
   THIS PRODUCT IS UL RECOGNISED
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE
   AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

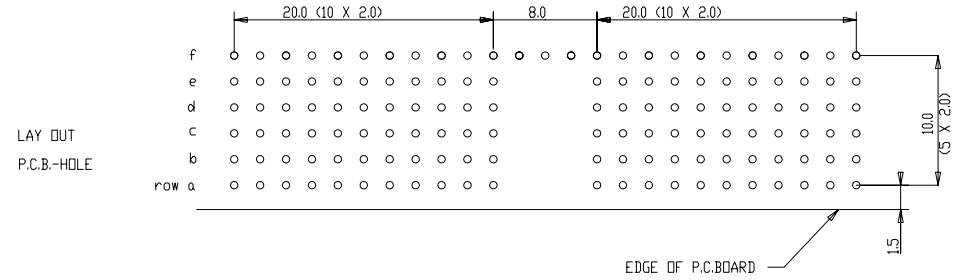

LAY OUT
P.C.B.-HOLE

rev	ecn no	dr	date
A	CONVERSION VISION 05	KN	14-9-01
B	105-0093	MINI	08/06/05
C	DG05-0278	Kason	02/08/05
D	DG07-0362	Kason	05/09/07
-	-	-	-
-	-	-	-
07	DIMENSION CHANGED	R.M	09.08.01

Material		Spec ref	
Mat code		tolerance	projection
Heattreat			MM
Plating/Finish			
Dr 4 2 92	J V B	size A1	Scale 5.000
Eng		Product family MILLIPACS	
Chr		Model Name HM2R10PA510F----	ECN
Appr		Model Revision	REL Level
FCI title	MPACS 5+2R RA RCP CONN TYPE A	dwg no BS,C,201444,031	Rev. D
Pro/E File	catalog no HM2R10PA510F----	CUSTOMER DRAWING	sheet 1 of 1

The entire statement herein, reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PDM: Rev:D STATUS: Released Printed: Apr 19, 2008