
GSD

1065-2

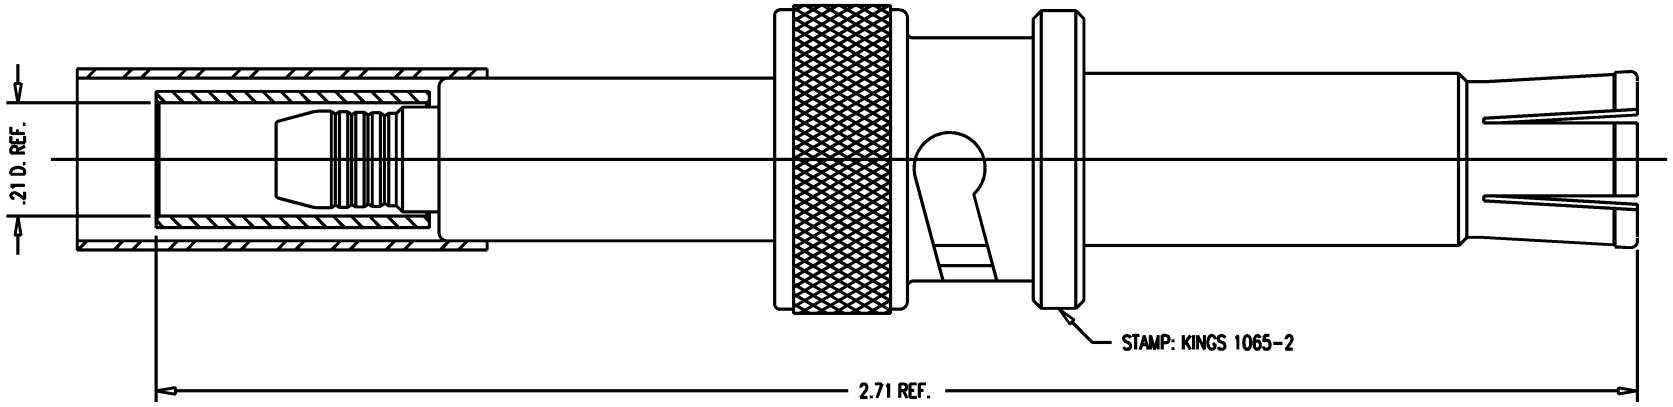

NOTES:
1. FOR USE WITH LASL TYPE C 9Y19503 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-419.
3. MATERIALS:
   - HEAT SHRINK TUBE: POLYOLEFIN, MIL-I-23053/5
   - O-RING: SYNTHETIC RUBBER, MIL-P-25732
   - GASKET: SILICONE RUBBER, ZZ-R-765
   - INSULATOR: H.D.POLYETHELENE, MIL-P-22748
   - K-GRIP SLEEVE: COM'L BRONZE, ASTM-B-140
   - SPRING WASHER, CENTER CONTACT, BODY } BER. COPPER, ASTM-B-194
   - ALL OTHER METAL PARTS: BRASS, ASTM-B16
4. FINISHES:
   - CENTER CONTACT: GOLD PLATE PER MIL-G-45204
   - SPRING WASHER: SILVER PLATE PER QQ-S-365
   - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
5. ELECTRICAL CHARACTERISTICS:
   - NOMINAL IMPEDANCE: NON-CONSTANT
   - OPERATING VOLTAGE: 10KV DC

GSD

REVISIONS

ISSUE	CHANGES
8	CN 36757 C REDRAWN ME 01/04/96

QGS1138

SCALE : 4:1

APPROX SURFACE AREA

USED ON

REF:

PL, 10KV, F

DRAWN	ME	DATE 01/04/96
DESIGN	MJB	DATE 01/04/96
APPR.		DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1065-2

MAY 2007 THIS DRAWING BECAME THE PROPERTY OF PROPERTY OF
WINCHESTER ELECTRONICS CORPORATION, WALLINGFORD, CT 06492