


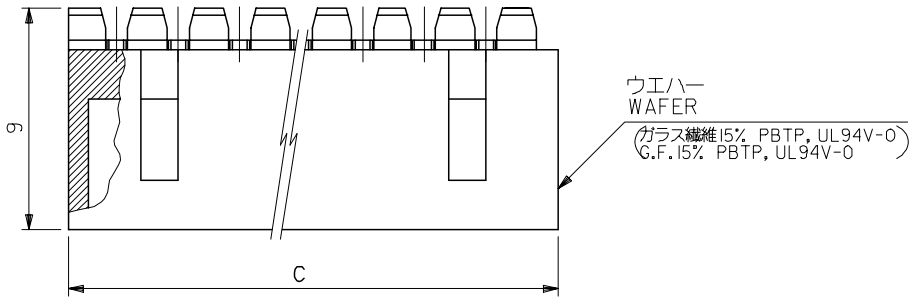


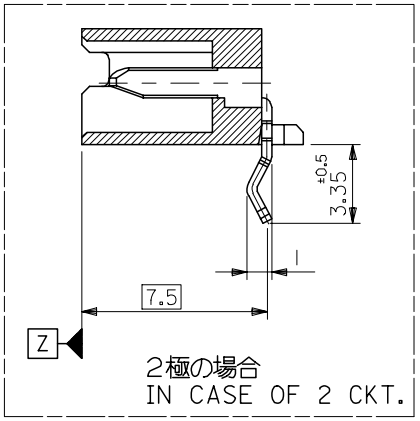

2極の場合
IN CASE OF 2 CKT.

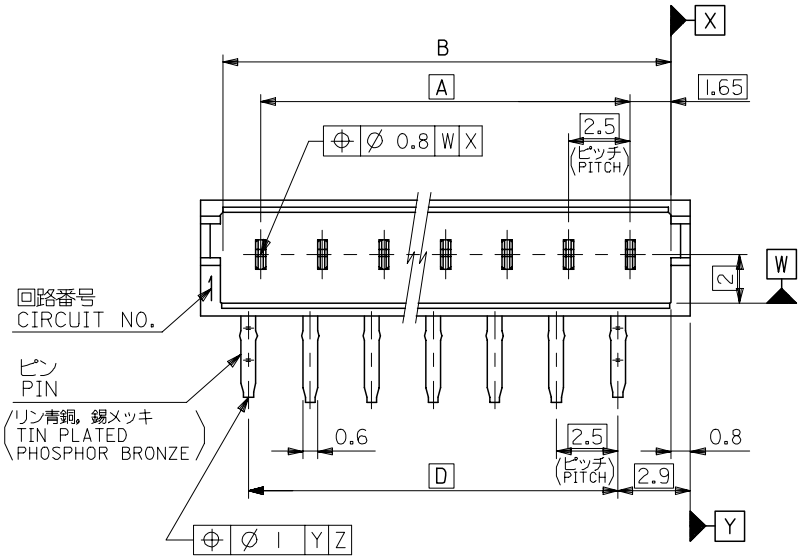

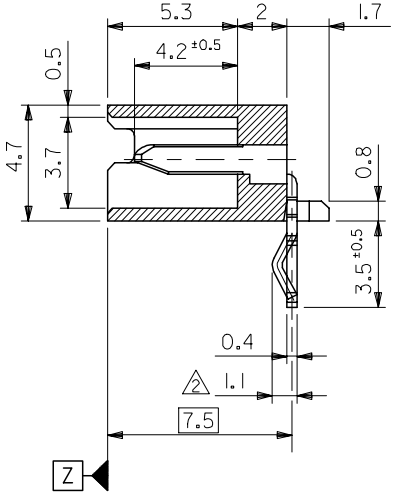


注記
NOTES

1. 嵌合相手： 5480-N
   MATES WITH : 5480-N
2. キンクは両端のソルダーテールのみとする。
   KINK, TO BE APPLIED FOR THE BOTH END OF TERMINAL.

D	C	B	A	EDP NO.	ENG. NO.	極数 CKTS.
35	39.9	38.3	35	39-27-6154	5484-15AX	15
32.5	37.4	35.8	32.5	-6144	-14AX	14
30	34.9	33.3	30	-6134	-13AX	13
27.5	32.4	30.8	27.5	-6124	-12AX	12
25	29.9	28.3	25	-6114	-11AX	11
22.5	27.4	25.8	22.5	-6104	-10AX	10
20	24.9	23.3	20	-6094	-09AX	9
17.5	22.4	20.8	17.5	-6084	-08AX	8
15	19.9	18.3	15	-6074	-07AX	7
12.5	17.4	15.8	12.5	-6064	-06AX	6
10	14.9	13.3	10	-6054	-05AX	5
7.5	12.4	10.8	7.5	-6044	-04AX	4
5	9.9	8.3	5	-6034	-03AX	3
2.5	7.4	5.8	2.5	39-27-6024	5484-02AX	2

(公差非累積
NON-ACCUM.)



基板取付穴推奨寸法
RECOMMENDED P.C.B. HOLE DIMENSIONS
(t=1.6)

REVISED
EC NO: J2007-1058 2006/10/10
DRWN:OHIRAWATA 2006/10/16
CHKD:KTOYODA 2006/10/16
APPR:NUKITA 2006/10/16
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 5:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: H.HIRAMOTO DATE: '88/8/6
CHECKED BY: S.KUNISHI DATE: '96/3/18
APPROVED BY: S.KUNISHI DATE: '96/3/18
MATERIAL NO.: SEE CHART

TITLE: 2.5 LOW PROFILE WAFER ASSY R/A WITH KINK

MOLEX INCORPORATED

DOCUMENT NO.: SD-5484-NAX
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION