
DO NOT SCALE PRINT

Honeywell

SWITCH - BASIC

CATALOGUE LISTING

V5B210CB

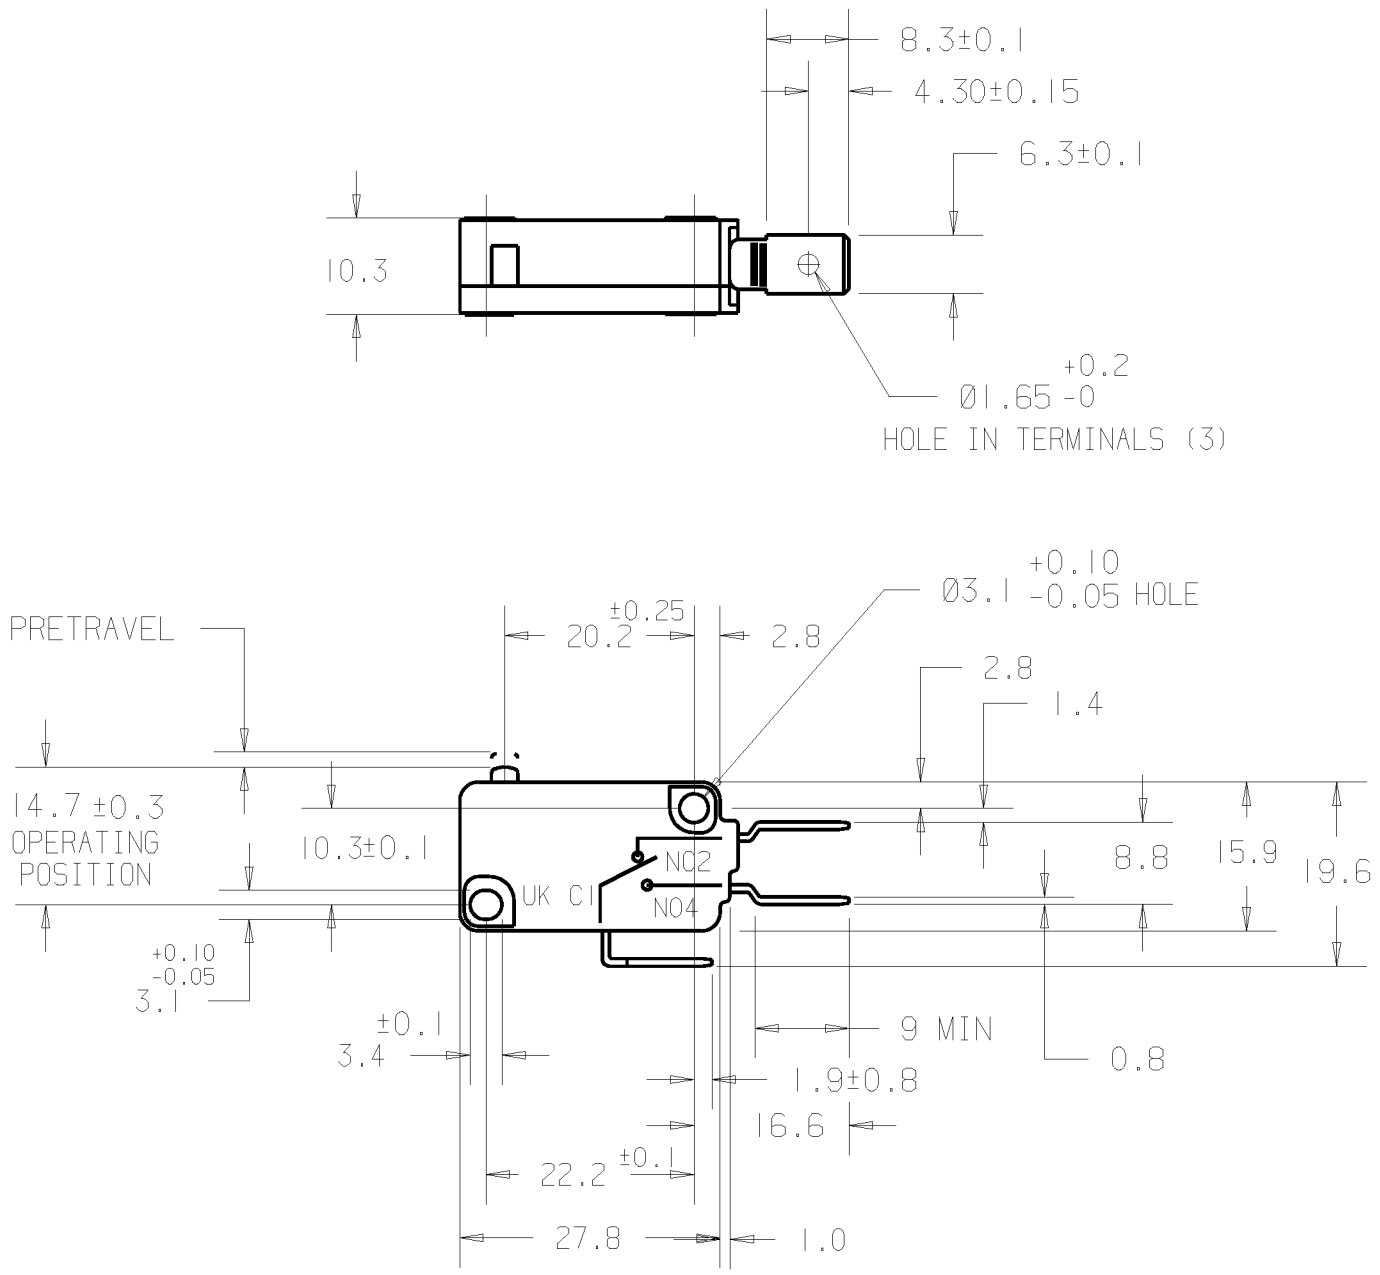

NOTES:-

1. MOUNTING HOLES WILL ACCEPT Ø3 MAX PINS OR SCREWS.
2. TERMINALS WILL ACCEPT 6.3 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.

THE COPYRIGHT OF THIS DRAWING IS THE PROPERTY OF HONEYWELL LTD. THE DRAWING IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE :-1/1
OPERATING FORCE 300 g MAX	CONTACT ARRANGEMENT S.P.D.T.	DIMENSIONS ARE IN MILLIMETRES
DIFFERENTIAL FORCE	NL63	TOLERANCES UNLESS OTHERWISE STATED
RELEASE FORCE 75 g MIN	19	±0.4
FREE POSITION	16(4)A 250V ~	
PRETRAVEL 1.6 MAX	T150 μ 5E4	
DIFFERENTIAL TRAVEL 0.25 MAX		ANGULAR ±
OVERTRAVEL 0.8 MIN		MODIFY ON CAD3D SYSTEM ONLY
FULL OVERTRAVEL FORCE		

DRAWN	A MCCRUM	2/97	
CHECK			
DESIGN	A MCCRUM	2/97	
AUTHOR'N			

ISSUE 2

DRAWING NUMBER M

RELEASE NUMBER MS-12192

REPLACES V5B210CB

REVISIONS

2	A.M.
17/04/00	