Miniature Power PCB Relay T7N/T7N-WG

- **1 pole 10A, 1 form C (1CO) or 1 form A (1NO) contact**
- **Version T7N-WG with tracking resistance CTI 325**
- **WG version: Product in accordance to IEC60335-1**



F0189-D

Typical applications
Domestic appliances, heating control, building control, measurement&control

Approvals

T7N: VDE REG.-Nr. 6175, UL E214025
T7N-WG: VDE REG.-Nr. 119012, UL E214025
Technical data of approved types on request

Contact Data


Contact arrangement	1 form C (1CO) or 1 form A (1NO)
Rated voltage	250VAC
Max. switching voltage	400VAC
Rated current	10A
Limiting making current, max 4 s, duty factor 10%	35A
Breaking capacity max.	2500VA
Contact material	$AgSnO_2$, AgCdO
Frequency of operation, with/without load	1800/18000h^{-1}
Operate/release time max.	9/5ms
Bounce time max., form A	3ms

Contact ratings


Type	Contact	Load	Cycles
IEC 61810			
T7NV1D4-…-WG(-A)	A (NO)	10A, 250VAC, cosφ=1, 85°C	100x10^3
T7NS1D4-…-WG(-A)	A (NO)	10A, 250VAC, cosφ=1, 85°C	6x10^3
T7NV5D4-…-WG(-A)	A of C	10A, 250VAC, cosφ=1, 85°C	100x10^3
T7NS5D4-…-WG(-A)	A of C	10A, 250VAC, cosφ=1, 85°C	6x10^3
T7NV5D4-…-WG(-A)	B of C	6A, 250VAC, cosφ=1, 85°C	50x10^3
T7NS5D4-…	C (CO)	10A/5A, 250VAC, cosφ=1, 85°C	6x10^3
T7NS1D4-…-WG(-A)	A (NO)	10A, 250VAC, cosφ=1, 85°C	6x10^3
UL 508			
T7N...D4-…-WG(-A)	A (NO)	10A, 250VAC, resistive, 85°C	100x10^3
T7N...D4-…-WG(-A)	A (NO)	1/4hp, 120VAC, motor, 40°C	100x10^3
T7N...D4-…	A (NO)	10A, 250VAC, resistive, 85°C	30x10^3

Mechanical endurance, >10x10^6 operations

Max. DC load breaking capacity



Electrical endurance



Coil Data


Coil voltage range	5 to 48 VDC
Operative range, IEC 61810	2
Non-release voltage, % of rated coil voltage	50%
Coil insulation system according UL1446	class F

Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
05	5	3.5	0.5	70	357
06	6	4.2	0.6	100	360
09	9	6.3	0.9	225	360
12	12	8.4	1.2	400	360
18[1)]	18	13.5	1.8	900	360
24	24	16.8	2.4	1600	360
36	36	25.2	3.6	3600	360
48	48	33.6	4.8	6400	360

1) 18VDC coil: UL approval only, not registered with VDE.
All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

Coil operating range DC

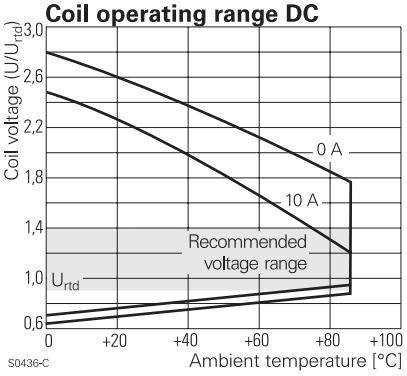

Insulation Data	T7N	T7N-WG
Initial dielectric strength		
between open contacts	1000 V$_{rms}$	1000 V$_{rms}$
between contact and coil	2500 V$_{rms}$	2500 V$_{rms}$
Clearance/creepage		
between contact and coil	≥2/3mm	≥2.5/3.5mm
Material group of insulation parts	IIIa	IIIa
Tracking index of relay base	PTI175	PTI325

04-2011, Rev. 0411
www.te.com
© 2011 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.


Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions


Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.


Miniature Power PCB Relay T7N/T7N-WG (Continued)

Other Data	T7N	T7N-WG
Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter		
Resistance to heat and fire	according EN60335, par.30	
Ambient temperature	-40 to 85°C	
Category of environmental protection IEC 61810	RTIII - wash tight (RTII - flux proof)	RTII - flux proof RTIII - wash tight
Vibration resistance (functional), form A/form B, 30 to 400Hz	>14/8g	
Shock resistance (destructive)	100g	
Terminal type	PCB-THT	
Weight	11 g	
Resistance to soldering heat THT, IEC 60068-2-20		
flux proof version	270°C/10s	
wash tight version	260°C/5 s	
Packaging unit	25pcs., 1000 pcs.	


PCB layout / terminal assignment
Bottom view on solder pins







Dimensions

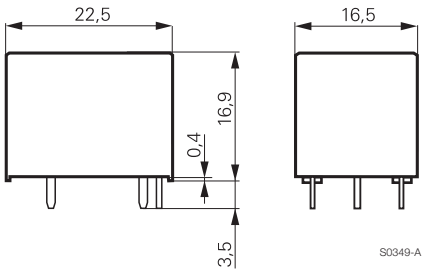

Product code structure

Typical product code	T7N	V	1	D	4	-06	-WG

Type
T7N Miniature Power PCB Relay T7N

Version
S Wash tight **V** Flux proof

Contact configuration
1 1 form A contact (1 NO) **5** 1 form C contact (1 CO)

Coil version
H DC coil 450mW **D** DC coil 360mW

Contact material
1 AgCdO **4** $AgSnO_2$

Coil
Coil code: please refer to coil versions table

Version
Blank T7N standard version, CTI 225
WG CTI 325 version, product in accordance with IEC 60335-1
WG-A CTI 325 for relay base only

Other types on request

04-2011, Rev. 0411
www.te.com
© 2011 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

Miniature Power PCB Relay T7N/T7N-WG (Continued)

Product code	Version	Cont. material	Cont.arrangement	Coil	Part number
T7NS1D4-05	Wash tight	$AgSnO_2$	1 form A	5VDC	6-1440006-9
T7NS1D4-06	CTI 225		1 NO contact	6VDC	7-1440006-0
T7NS1D4-09				9VDC	7-1440006-1
T7NS1D4-12				12VDC	7-1440006-2
T7NS1D4-24				24VDC	7-1440006-4
T7NS1D4-36				36VDC	7-1440006-5
T7NS1D4-48				48VDC	7-1440006-6
T7NS5D4-05			1 form C	5VDC	5-1440005-2
T7NS5D4-06			1 CO contact	6VDC	6-1440006-1
T7NS5D4-09				9VDC	6-1440006-2
T7NS5D4-12				12VDC	6-1440006-3
T7NS5D4-24				24VDC	6-1440006-5
T7NS5D4-36				36VDC	6-1440006-6
T7NS5D4-48				48VDC	6-1440006-7
T7NV1D4-05-WG	Flux proof		1 form A	5VDC	1721133-8
T7NV1D4-06-WG	CTI 325		1 NO contact	6VDC	1721133-9
T7NV1D4-09-WG	according			9VDC	1-1721133-0
T7NV1D4-12-WG	IEC 60335-1			12VDC	1-1721133-1
T7NV1D4-24-WG				24VDC	1-1721133-2
T7NV1D4-36-WG				36VDC	1-1721133-3
T7NV1D4-48-WG				48VDC	1-1721133-4
T7NV5D4-05-WG			1 form C	5VDC	1649305-8
T7NV5D4-06-WG			1 CO contact	6VDC	1649305-9
T7NV5D4-09-WG				9VDC	1-1649305-0
T7NV5D4-12-WG				12VDC	1-1649305-1
T7NV5D4-24-WG				24VDC	1-1649305-2
T7NV5D4-36-WG				36VDC	1-1649305-3
T7NV5D4-48-WG				48VDC	1-1649305-4
T7NV1D4-05-WG-A	Flux proof		1 form A	5VDC	2-1649280-0
T7NV1D4-06-WG-A	relay base		1 NO contact	6VDC	2-1649280-1
T7NV1D4-09-WG-A	CTI 325			9VDC	2-1649280-2
T7NV1D4-12-WG-A				12VDC	2-1649280-3
T7NV1D4-24-WG-A				24VDC	2-1649280-4
T7NV1D4-36-WG-A				36VDC	2-1649280-5
T7NV1D4-48-WG-A				48VDC	2-1649280-6
T7NV5D4-05-WG-A			1 form C	5VDC	1-1649324-0
T7NV5D4-06-WG-A			1 CO contact	6VDC	1-1649324-1
T7NV5D4-09-WG-A				9VDC	1-1649324-2
T7NV5D4-12-WG-A				12VDC	1-1649324-3
T7NV5D4-24-WG-A				24VDC	1-1649324-4
T7NV5D4-36-WG-A				36VDC	1-1649324-5
T7NV5D4-48-WG-A				48VDC	1-1649324-6

04-2011, Rev. 0411
www.te.com
© 2011 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.