
CR2


■ Dimensions(mm)

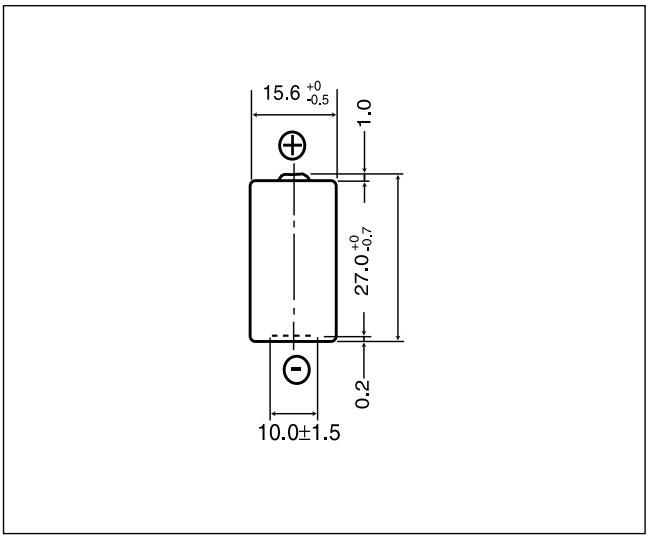

■ Specification

Nominal voltage(V)	3
Nominal capacity(mAh)	850
Continuous drain(mA)	20
Operating temperature(˚C)	-40 to +70*


■ Discharge temperature characteristics

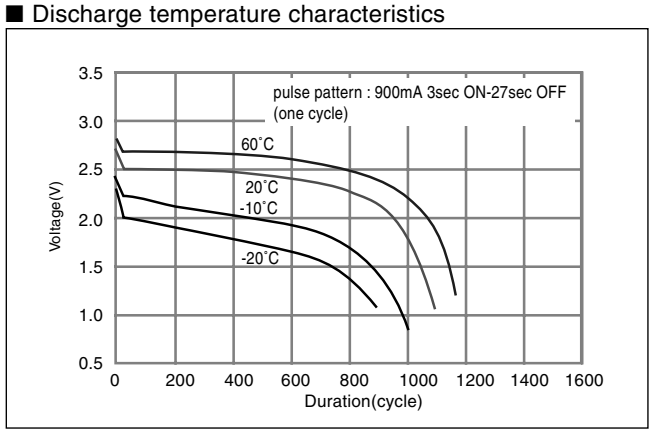

✻ Please consult Panasonic for use below and above -20°C to +60°C.

CR123A


■ Dimensions(mm)

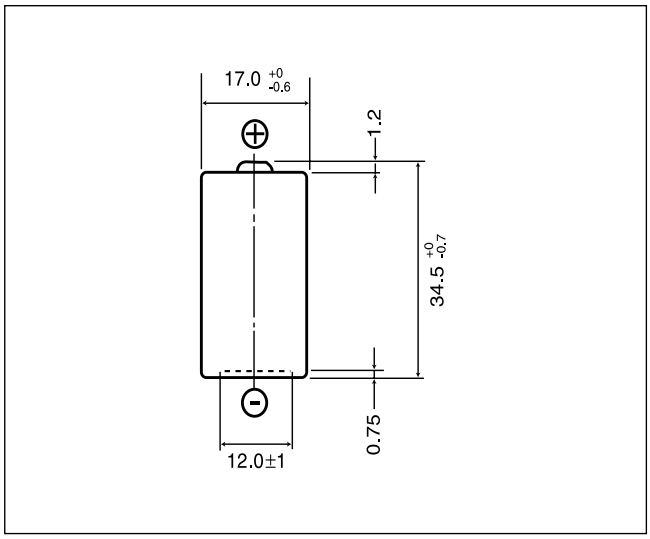

■ Specification

Nominal voltage(V)	3
Nominal capacity(mAh)	1,400
Continuous drain(mA)	20
Operating temperature(˚C)	-40 to +70*

■ Discharge temperature characteristics

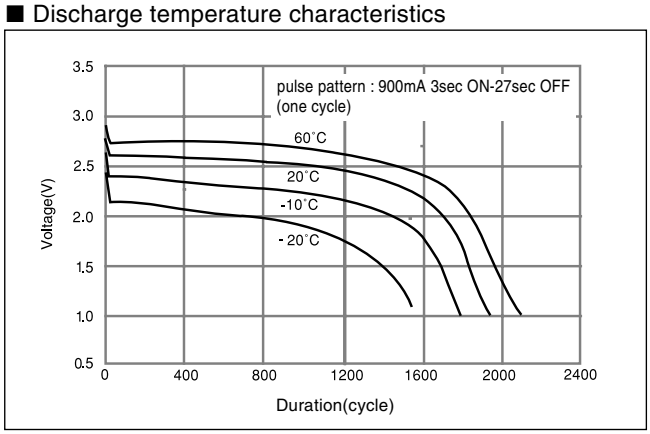

✻ Please consult Panasonic for use below and above -20°C to +60°C.

∗ The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.